


Daytime Directional Pattern

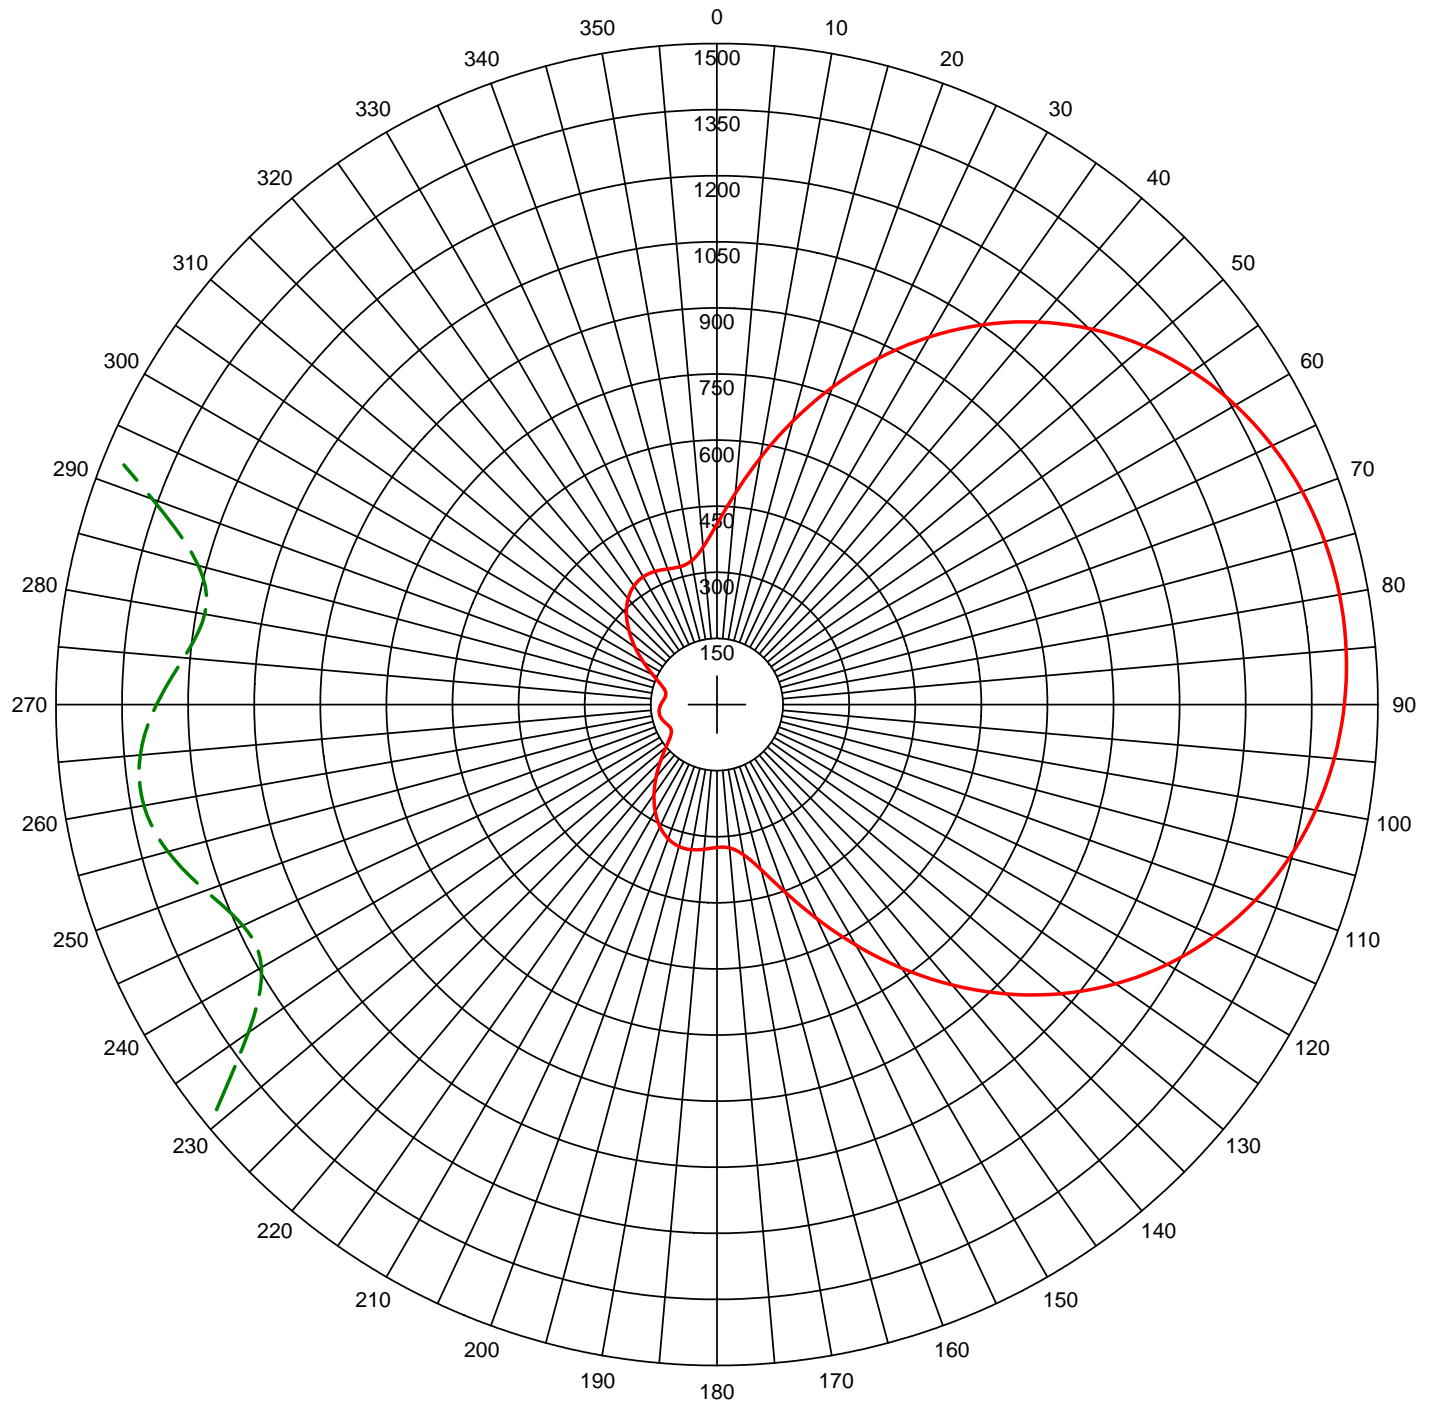

Theo RMS: 733.184 mV/m@1km
 Std RMS: 770.279 mV/m@1km
 Q: 24.672 mV/m@1km

Horizontal Plane Standard Pattern

— Pattern (mV/m @ 1km)
 - - - Pattern X10

#	Field Ratio	Phase (deg)	Spacing (deg)	Orient (deg)	Height (deg)	Ref Switch	TL Switch	A (deg)	B (deg)	C (deg)	D (deg)
1	1.000	0.0	0.0	0.0	90.0	0	0	0.0	0.0	0.0	0.0
2	1.070	231.8	90.0	81.6	90.0	0	0	0.0	0.0	0.0	0.0
3	0.510	85.5	180.0	81.6	90.0	0	0	0.0	0.0	0.0	0.0

Call: WEUS-Proposed
 Freq: 810 kHz
 ORLOVISTA, FL, US
 Lat: 28-34-18 N
 Lng: 081-26-02 W
 Power: 5.0 kW
 Theo RMS: 733.18 mV/m @ 1km