

## EXHIBIT 15.5

### TABULATION OF PROPOSED PROTECTIONS TO NIGHTTIME STATIONS

	Freq.	Power	Pat-Mult	Theo-RMS	Standard	Pat-RSS	Q
	kHz	(kW)	(mV/m)	(mV/m)	RMS-mV/m	(mV/m)	Factor
	1080	2.600	1039.25	462.77	487.55	1522.45	38.0613

Twr	Field	Phase	Spacing	Orient	Twr	TL/	Elec-Ht	TL(B)	TL(C)	TL(D)
No.	Ratio	Deg.	Deg.	Deg.	Ref	Sec	in Deg.	Deg.	Deg.	Deg.
1	0.388	-155.0	0.0	0.0	0	0	77.4	0.0	0.0	0.0
2	1.000	0.0	70.0	170.0	1	0	77.4	0.0	0.0	0.0
3	0.943	154.5	70.0	170.0	1	0	77.4	0.0	0.0	0.0
4	0.326	-51.0	70.0	170.0	1	0	77.4	0.0	0.0	0.0


Towards	Azimuth	Kilo-	**SWF**	Crit.	Angle	-----Radiations at:-----			RSS	Max. Rad.	Perm.	Prop.
	Deg-Tru	meters	Field	LO	HI	HO Angle	LO Angle	HI Angle	Limit	Allowed	Limit	Limit
* WTSO	318.2	203.5	0.28115	34.8	49.1	817.17	436.12	215.84	9.85	438.0	24.63	24.52
WVCG	157.5	1883.5	0.01504	0.1	3.0	87.41	87.41	86.56	8.77	728.4	2.19	0.26
<b>KRLD</b>	<b>222.1</b>	<b>1255.9</b>	<b>0.02857</b>	<b>3.7</b>	<b>7.9</b>	<b>47.40</b>	<b>47.27</b>	<b>46.79</b>	<b>5.17</b>	<b>223.7</b>	<b>1.28</b>	<b>0.27</b>
XEDY1	256.2	2598.3	0.00511	0.0	0.0	43.71	43.71	43.71	14.44	7,059.7	7.22	0.04
KSCO	271.4	2979.2	0.00466	0.0	0.0	65.50	65.50	65.50	14.17	3,798.6	3.54	0.06
WRYT	212.4	383.0	0.15700	19.7	31.1	44.25	42.44	38.76	8.42	67.0	2.10	1.33
WKJK	156.8	401.8	0.14826	18.8	29.8	86.01	59.05	37.94	8.77	73.9	2.19	1.75
<b>WTIC</b>	<b>84.4</b>	<b>1230.3</b>	<b>0.02330</b>	<b>3.9</b>	<b>8.2</b>	<b>43.89</b>	<b>43.75</b>	<b>43.28</b>	<b>9.21</b>	<b>489.8</b>	<b>2.28</b>	<b>0.20</b>
KOTK	290.8	2815.9	0.00361	0.0	0.0	309.85	309.85	309.85	6.41	2,218.8	1.60	0.22
KVNI	296.1	2378.5	0.00490	0.0	0.4	405.12	405.12	405.09	6.80	1,735.3	1.70	0.40
CKSA	315.4	2102.8	0.00904	0.5	0.5	769.19	769.09	769.09	3.56	985.7	1.78	1.39
* <b>KAAY</b>	<b>208.5</b>	<b>879.2</b>	<b>0.05056</b>	<b>7.3</b>	<b>13.2</b>	<b>42.96</b>	<b>42.60</b>	<b>41.90</b>	<b>3.94</b>	<b>973.2</b>	<b>9.84</b>	<b>0.43</b>

\* indicates an ADJACENT CHANNEL whose allowable contribution to the RSS Limit is 20 dB less than the Permissible Limit shown.

A complete nighttime study has been conducted on all co- and 1<sup>st</sup> adjacent channel stations. Analysis of the complete study has concluded the proposed operation will not interfere with any protected operation. In response to FCC attempts to streamline the application process, 1<sup>st</sup> adjacent channel and foreign nighttime protections in which the proposed operation will have a negligible effect have been omitted to reduce paperwork. A complete list of all protections will be supplied upon request. ***Bold-Italicized*** stations have individual nighttime point studies included in this application.

## EXHIBIT 15.5

### TABULATION OF PROPOSED PROTECTIONS TO NIGHTTIME STATIONS

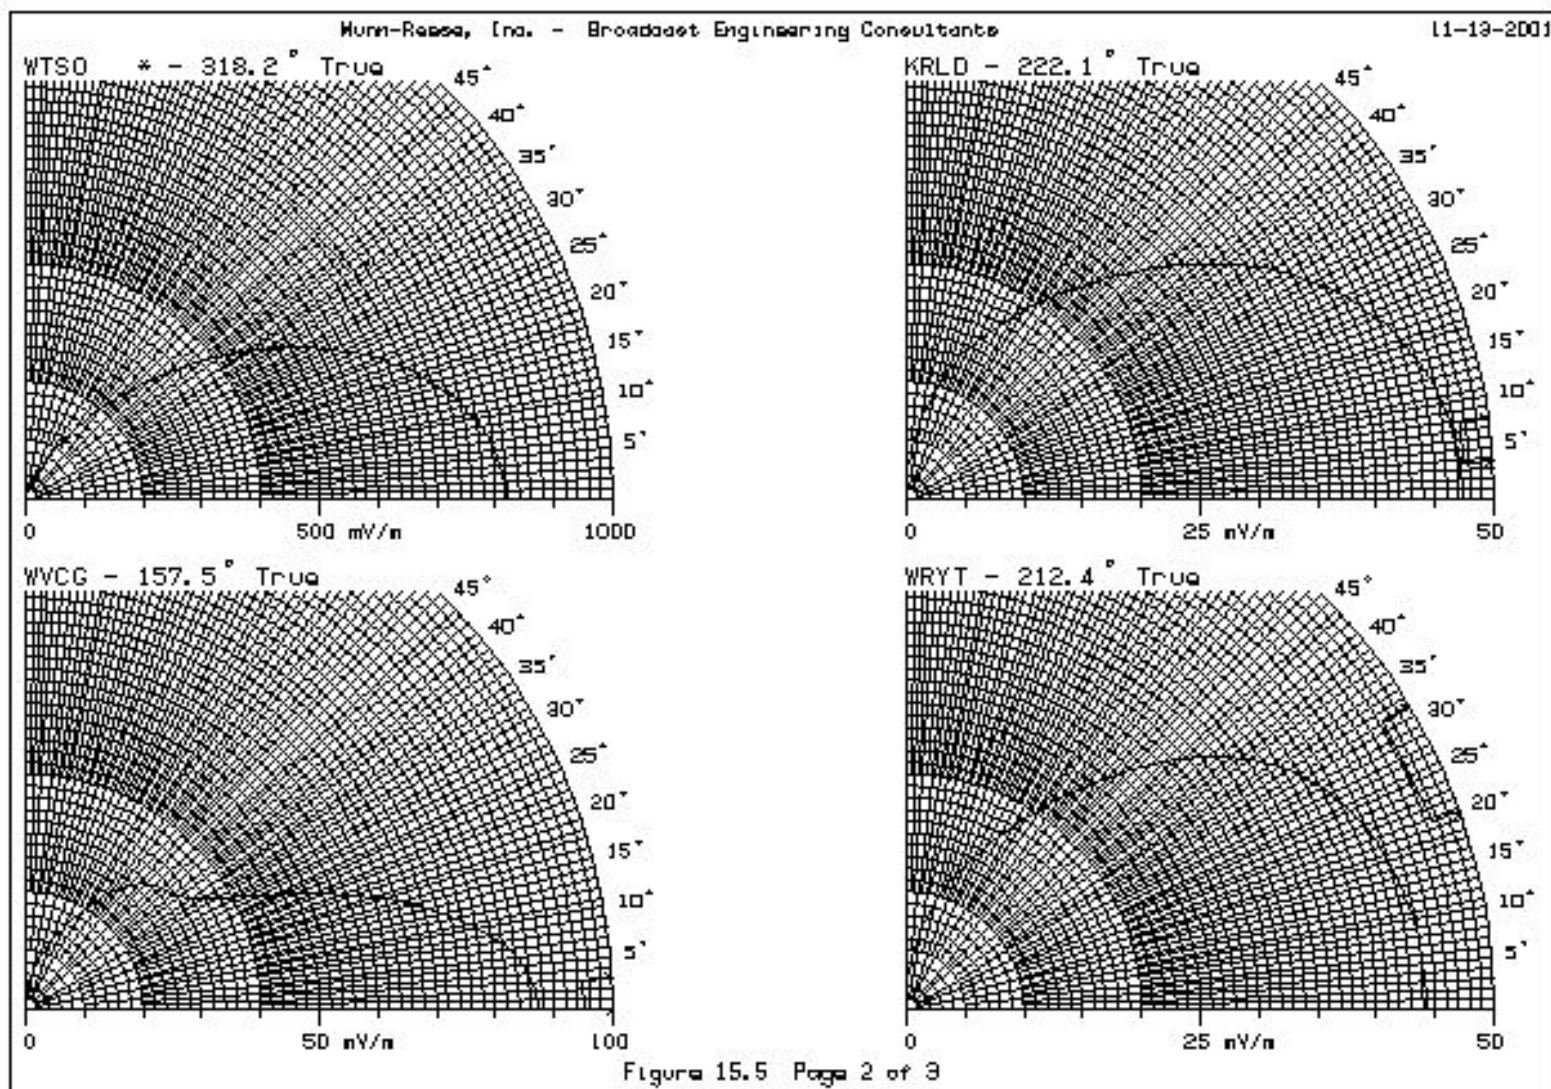

## EXHIBIT 15.5

### TABULATION OF PROPOSED PROTECTIONS TO NIGHTTIME STATIONS

