
WILLOUGHBY & VOSS

In the case of occupational exposure when maintenance personnel are within 48.4 meters of the center of radiation of the lower antenna, the transmitter will be turned off.

Evaluation using the "worst case" requirements of Table 6 indicates that the instant proposal is in compliance with the adopted guideline for general population/uncontrolled exposure limits, (0.2 mW/cm²).

METHODS


All calculations, graphs, contours and other technical data contained in or attached to this document have been determined in accordance with the existing Rules of the Federal Communications Commission unless specifically stated otherwise.

CERTIFICATION

I certify and state under penalty of perjury, that I have prepared this statement and its associated exhibits on behalf of New Wavo Communication Group, Inc., and that I have examined the material contained herein and found it to be accurate and true to the best of my knowledge and belief.

I further certify that I have made such filings with the FCC and my credentials are a matter of record.

June 4, 2002

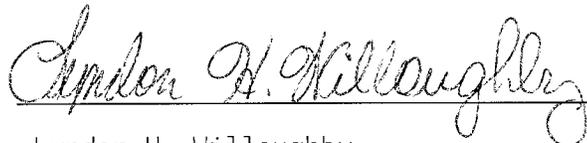

Lyndon H. Willoughby
Willoughby & Voss
Technical Consultant to:

New Wavo Communication Group, Inc.

KUST RADIO
NARRATIVE