

Non-Interference Compliance

Regarding Facility id 156541

Channel 245

Description of Exhibit 13 Contents

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all of the applicable rule sections and that this application for a construction permit is in full compliance with 47 C.F.R. § 74.1204.

Let it be noted that should any actual real world interference occur, the applicant acknowledges that it will promptly suspend operation of this translator in accordance with 47 C.F.R. § 74.1203.

Page 2 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference provisions based on 47 C.F.R. § 74.1204(d), which states:

[A]n application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable.

Page 3 contains a tabulation of the vertical radiation pattern of the proposed antenna and the minimum ground clearance of the interfering contour based on this pattern.

Pages 4 through 6 include a tabulation of the vertical radiation pattern for the proposed antenna provided by the antenna manufacturer.

Page 7 of this exhibit contains the tabulated data from the interference analysis, which shows all stations whose protected contours come within 50 km of the 34 dBμ F(50,10) contour of the proposed translator. These tabulated values were calculated using data from the FCC's CDBS files and 30 arc second terrain data. The column labeled "Adj" shows the number of channels difference between the entry and the proposed translator. The column labeled "Dist" shows the distance in km. The column labeled "Overlap" shows the area of contour overlap in square kilometers.

Page 8 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 minute quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using the free space equation and 120 radials.

Page 9 of this exhibit is an aerial photo of the vicinity surrounding the proposed translator's tower site.

Note: The tallest buildings within the zone of predicted interference are 20ft or less. This application provides 24.1m(79ft) ground clearance so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Compliance with 47 C.F.R. § 74.1204(d)

All authorized second and third adjacent stations with which the proposed translator has contour overlap are tabulated below. Column four show the station's signal level at the proposed translator's tower site, and column five gives the minimum value within the entire standard interfering contour of the proposed translator (100 dBμ for most classes, 94 for class B, 97 for class B1). The minimum second or third adjacent F(50,50) contour within the proposed translator's standard interfering contour was used to calculate the proposed translator's actual "worst-case" interfering contour.

Application_id	File Number	Callsign	Contour at Tower	Min. Contour
217923	BLH19951215KD	KLYY	71.4	71.4
Minimum F(50,50) Contour of Adjacent Station within Proposed Translator's Standard Interfering Contour				71.4


FCC 02-244 at Section II.A.5 states that "when demonstrating that 'no actual interference will occur due to . . . other factors,' pursuant to Section 74.1204(d), an applicant may use the undesired-to-desired signal ratio method." The undesired-to-desired ratio for second and third adjacent stations required by § 74.1204(a) is 40 dB. Since the minimum protected contour strength within the proposed translator's standard interference contour is **71.4 dBμ**, this makes the proposed translator's worst-case interfering contour **111.4 dBμ**. By the free-space equation, this contour is calculated to extend a maximum of **138.7 m** from the transmit antenna.

The maximum horizontal plane of the interfering contour was calculated for 120 radials and plotted on the pertinent portion of a USGS quadrangle (page 8 of this exhibit). However, the field strength of the proposed translator's antenna varies with angle of depression from horizontal. The antenna relative fields are tabulated on the following page at 5 degree increments, starting at 5 degrees below horizontal. Antenna relative field strength data was provided and certified by the manufacturer of the proposed antenna. Using a free-space calculation that neglects any loss due to reflection, the vertical ground clearance of the proposed translator's interference contour has been tabulated. As shown on the following page, the area of interference clears the tower ground level (TGL) by **24.1 m** at the lowest point. The applicant has taken into account USGS quadrangles and relevant aerial photography in stating that no structures, except possibly tower support structures, puncture the area of interference.

Note: The tallest buildings within the zone of predicted interference are 20ft or less. This application is provides 24.1m(79ft) ground clearance so a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Antenna Manufacturer:	SCA
Antenna Model:	FMV
CORAGL:	82 m
Maximum ERP:	0.054 kW
Interfering Contour:	111.4 dBμ
Max Int. Contour Distance:	138.7 m
Min Ground Clearance:	24.1 m

Depression Angle Below Horizontal	Antenna Relative Field	ERP (watts)	Distance to Interfering Contour from Antenna (m)	Horizontal Distance of Interfering Contour from Tower (m)	Vertical Clearance of Interfering Contour above TGL (m)
5	.995	53.5	138.0	137.5	70.0
10	.982	52.1	136.2	134.2	58.3
15	.956	49.4	132.6	128.1	47.7
20	.918	45.5	127.4	119.7	38.4
25	.867	40.6	120.3	109.0	31.2
30	.803	34.8	111.4	96.5	26.3
35	.727	28.5	100.9	82.6	24.1
40	.645	22.5	89.5	68.6	24.5
45	.558	16.8	77.4	54.7	27.3
50	.472	12.0	65.5	42.1	31.8
55	.388	8.1	53.8	30.9	37.9
60	.310	5.2	43.0	21.5	44.8
65	.240	3.1	33.3	14.1	51.8
70	.176	1.7	24.4	8.4	59.1
75	.119	0.8	16.5	4.3	66.1
80	.067	0.2	9.3	1.6	72.8
85	.019	0.0	2.6	0.2	79.4
90	.025	0.0	3.5	0.0	78.5
Minimum Clearance above TGL:					24.1 m

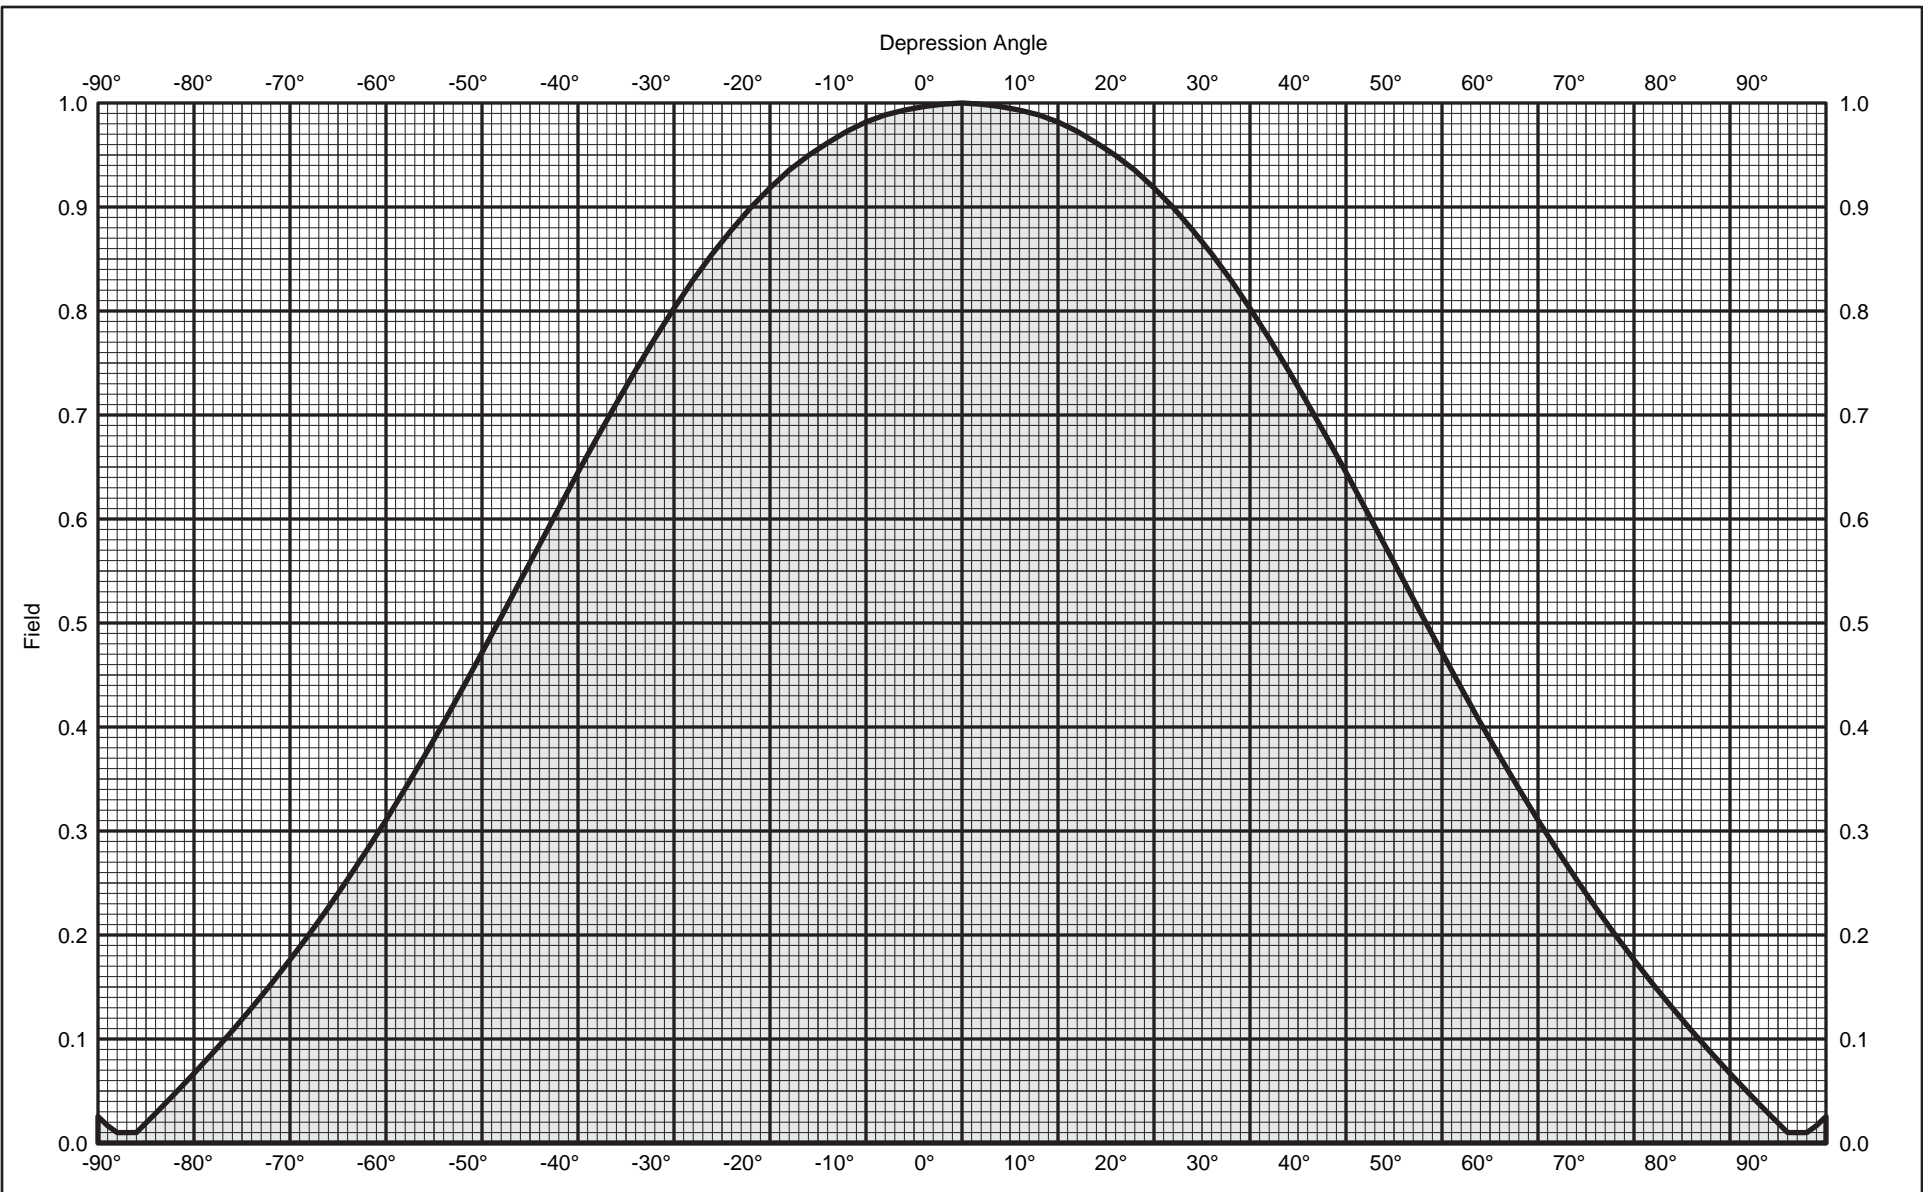

KATHREIN
SCALA DIVISION

Post Office Box 4580 Phone:(541)779-6500
Medford, OR 97501 (USA) Fax:(541)779-3991
<http://www.kathrein-scala.com>

FMV Dipole
FM
Maximum gain: 1.0 dBd
Vertical polarization

Vertical radiation pattern
0 degree electrical downtilt



FMV Dipole

FM

Maximum gain: 1.0 dBd

Vertical polarization

Vertical radiation pattern

0 degree electrical downtilt

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
-90	0.025	-31.89	-30.89	0.00	-45	0.558	-5.07	-4.07	0.39
-89	0.017	-35.56	-34.56	0.00	-44	0.575	-4.80	-3.80	0.42
-88	0.010	-40.00	-39.00	0.00	-43	0.593	-4.54	-3.54	0.44
-87	0.010	-40.00	-39.00	0.00	-42	0.610	-4.29	-3.29	0.47
-86	0.010	-39.94	-38.94	0.00	-41	0.628	-4.05	-3.05	0.50
-85	0.019	-34.30	-33.30	0.00	-40	0.645	-3.81	-2.81	0.52
-84	0.028	-30.91	-29.91	0.00	-39	0.662	-3.59	-2.59	0.55
-83	0.038	-28.42	-27.42	0.00	-38	0.678	-3.37	-2.37	0.58
-82	0.047	-26.48	-25.48	0.00	-37	0.695	-3.16	-2.16	0.61
-81	0.057	-24.86	-23.86	0.00	-36	0.711	-2.96	-1.96	0.64
-80	0.067	-23.49	-22.49	0.01	-35	0.727	-2.77	-1.77	0.67
-79	0.077	-22.27	-21.27	0.01	-34	0.743	-2.58	-1.58	0.70
-78	0.087	-21.20	-20.20	0.01	-33	0.758	-2.40	-1.40	0.72
-77	0.098	-20.21	-19.21	0.01	-32	0.774	-2.23	-1.23	0.75
-76	0.108	-19.33	-18.33	0.01	-31	0.788	-2.07	-1.07	0.78
-75	0.119	-18.49	-17.49	0.02	-30	0.803	-1.91	-0.91	0.81
-74	0.130	-17.73	-16.73	0.02	-29	0.816	-1.76	-0.76	0.84
-73	0.141	-17.01	-16.01	0.03	-28	0.830	-1.62	-0.62	0.87
-72	0.152	-16.34	-15.34	0.03	-27	0.842	-1.49	-0.49	0.89
-71	0.164	-15.69	-14.69	0.03	-26	0.855	-1.36	-0.36	0.92
-70	0.176	-15.08	-14.08	0.04	-25	0.867	-1.24	-0.24	0.95
-69	0.188	-14.50	-13.50	0.04	-24	0.878	-1.13	-0.13	0.97
-68	0.201	-13.95	-12.95	0.05	-23	0.889	-1.02	-0.02	0.99
-67	0.214	-13.41	-12.41	0.06	-22	0.899	-0.92	0.08	1.02
-66	0.226	-12.90	-11.90	0.06	-21	0.909	-0.83	0.17	1.04
-65	0.240	-12.40	-11.40	0.07	-20	0.918	-0.74	0.26	1.06
-64	0.254	-11.92	-10.92	0.08	-19	0.927	-0.66	0.34	1.08
-63	0.268	-11.45	-10.45	0.09	-18	0.935	-0.58	0.42	1.10
-62	0.282	-11.01	-10.01	0.10	-17	0.942	-0.51	0.49	1.12
-61	0.296	-10.57	-9.57	0.11	-16	0.950	-0.45	0.55	1.14
-60	0.310	-10.16	-9.16	0.12	-15	0.956	-0.39	0.61	1.15
-59	0.326	-9.75	-8.75	0.13	-14	0.962	-0.34	0.66	1.16
-58	0.341	-9.35	-8.35	0.15	-13	0.967	-0.29	0.71	1.18
-57	0.356	-8.96	-7.96	0.16	-12	0.973	-0.24	0.76	1.19
-56	0.372	-8.59	-7.59	0.17	-11	0.977	-0.20	0.80	1.20
-55	0.388	-8.22	-7.22	0.19	-10	0.982	-0.16	0.84	1.21
-54	0.404	-7.87	-6.87	0.21	-9	0.985	-0.13	0.87	1.22
-53	0.421	-7.52	-6.52	0.22	-8	0.989	-0.10	0.90	1.23
-52	0.438	-7.18	-6.18	0.24	-7	0.991	-0.08	0.92	1.24
-51	0.455	-6.85	-5.85	0.26	-6	0.993	-0.06	0.94	1.24
-50	0.472	-6.53	-5.53	0.28	-5	0.995	-0.04	0.96	1.25
-49	0.489	-6.22	-5.22	0.30	-4	0.997	-0.03	0.97	1.25
-48	0.506	-5.92	-4.92	0.32	-3	0.998	-0.02	0.98	1.25
-47	0.523	-5.63	-4.63	0.34	-2	0.999	-0.01	0.99	1.26
-46	0.541	-5.34	-4.34	0.37	-1	0.999	-0.00	1.00	1.26
					0	1.000	0.00	1.00	1.26



FMV Dipole
FM

Maximum gain: 1.0 dBd
Vertical polarization

Vertical radiation pattern
0 degree electrical downtilt

Angle	Field	Rel.dB	dBd	PwrMult	Angle	Field	Rel.dB	dBd	PwrMult
0	1.000	0.00	1.00	1.26	45	0.558	-5.07	-4.07	0.39
1	0.999	-0.00	1.00	1.26	46	0.541	-5.34	-4.34	0.37
2	0.999	-0.01	0.99	1.26	47	0.523	-5.63	-4.63	0.34
3	0.998	-0.02	0.98	1.25	48	0.506	-5.92	-4.92	0.32
4	0.997	-0.03	0.97	1.25	49	0.489	-6.22	-5.22	0.30
5	0.995	-0.04	0.96	1.25	50	0.472	-6.53	-5.53	0.28
6	0.993	-0.06	0.94	1.24	51	0.455	-6.85	-5.85	0.26
7	0.991	-0.08	0.92	1.24	52	0.438	-7.18	-6.18	0.24
8	0.989	-0.10	0.90	1.23	53	0.421	-7.52	-6.52	0.22
9	0.985	-0.13	0.87	1.22	54	0.404	-7.87	-6.87	0.21
10	0.982	-0.16	0.84	1.21	55	0.388	-8.22	-7.22	0.19
11	0.977	-0.20	0.80	1.20	56	0.372	-8.59	-7.59	0.17
12	0.973	-0.24	0.76	1.19	57	0.356	-8.96	-7.96	0.16
13	0.967	-0.29	0.71	1.18	58	0.341	-9.35	-8.35	0.15
14	0.962	-0.34	0.66	1.16	59	0.326	-9.75	-8.75	0.13
15	0.956	-0.39	0.61	1.15	60	0.310	-10.16	-9.16	0.12
16	0.950	-0.45	0.55	1.14	61	0.296	-10.57	-9.57	0.11
17	0.942	-0.51	0.49	1.12	62	0.282	-11.01	-10.01	0.10
18	0.935	-0.58	0.42	1.10	63	0.268	-11.45	-10.45	0.09
19	0.927	-0.66	0.34	1.08	64	0.254	-11.92	-10.92	0.08
20	0.918	-0.74	0.26	1.06	65	0.240	-12.40	-11.40	0.07
21	0.909	-0.83	0.17	1.04	66	0.226	-12.90	-11.90	0.06
22	0.899	-0.92	0.08	1.02	67	0.214	-13.41	-12.41	0.06
23	0.889	-1.02	-0.02	0.99	68	0.201	-13.95	-12.95	0.05
24	0.878	-1.13	-0.13	0.97	69	0.188	-14.50	-13.50	0.04
25	0.867	-1.24	-0.24	0.95	70	0.176	-15.08	-14.08	0.04
26	0.855	-1.36	-0.36	0.92	71	0.164	-15.69	-14.69	0.03
27	0.842	-1.49	-0.49	0.89	72	0.152	-16.34	-15.34	0.03
28	0.830	-1.62	-0.62	0.87	73	0.141	-17.01	-16.01	0.03
29	0.816	-1.76	-0.76	0.84	74	0.130	-17.73	-16.73	0.02
30	0.803	-1.91	-0.91	0.81	75	0.119	-18.49	-17.49	0.02
31	0.788	-2.07	-1.07	0.78	76	0.108	-19.33	-18.33	0.01
32	0.774	-2.23	-1.23	0.75	77	0.098	-20.21	-19.21	0.01
33	0.758	-2.40	-1.40	0.72	78	0.087	-21.20	-20.20	0.01
34	0.743	-2.58	-1.58	0.70	79	0.077	-22.27	-21.27	0.01
35	0.727	-2.77	-1.77	0.67	80	0.067	-23.49	-22.49	0.01
36	0.711	-2.96	-1.96	0.64	81	0.057	-24.86	-23.86	0.00
37	0.695	-3.16	-2.16	0.61	82	0.047	-26.48	-25.48	0.00
38	0.678	-3.37	-2.37	0.58	83	0.038	-28.42	-27.42	0.00
39	0.662	-3.59	-2.59	0.55	84	0.028	-30.91	-29.91	0.00
40	0.645	-3.81	-2.81	0.52	85	0.019	-34.30	-33.30	0.00
41	0.628	-4.05	-3.05	0.50	86	0.010	-39.94	-38.94	0.00
42	0.610	-4.29	-3.29	0.47	87	0.010	-40.00	-39.00	0.00
43	0.593	-4.54	-3.54	0.44	88	0.010	-40.00	-39.00	0.00
44	0.575	-4.80	-3.80	0.42	89	0.017	-35.56	-34.56	0.00
					90	0.025	-31.89	-30.89	0.00

Adjacent Channel Study
For Station NEW, Facility_id: 156541

Co-channel through third adjacent:

App_id	Fac_id	File_Number	Call	Licensee	Class	City	State	Status	ERP	RCAMSL	Chan	Adj	Dist	Overlap
217923	58809	BLH-19951215KD	KLYY	ENTRAVISION HOLDINGS, LLC	B	RIVERSIDE	CA	LIC	72	1998	248	3	32.3	0.8134
1563674	138853	BNPFT-20030312ACE	NEW	LIVING PROOF, INC.	D	VICTORVILLE	CA	APP	0.25	914	243	2	7.9	0
63291	59273	BLFTB-19831121NF	KCAL-FM1	SBR BROADCASTING CORPORATION	D	TWIN PEAKS, ETC	CA	LIC	0.075	1894	244	1	31.7	0
1198662	138858	BLFT-20070803ADG	K246AR	CALVARY CHAPEL OF REDLANDS, INC.	D	GREEN VALLEY LA	CA	LIC	0.01	2046	246	1	34.8	0
167708	59272	BMLH-19911205KA	KCAL-FM	SBR BROADCASTING CORPORATION	A	REDLANDS	CA	LIC	1.75	1006	244	1	35.8	0
1546885	142098	BNPFT-20130327AMS	K243BQ	ADVANCE MINISTRIES, INC. D/B/A NEW LIFE	D	BIG BEAR CITY	CA	CP	0.01	2609	243	2	47.1	0
980234	89344	BLH-20040304ACM	KHDR	THE DRIVE LLC	A	LENWOOD	CA	LIC	1	1048	245	0	53.3	0
1570718	142343	BNPFT-20130826AAP	NEW	MARY V. GUTHRIE	D	PALMDALE	CA	APP	0.055	809	243	2	79.5	0
1549622	142343	BNPFT-20030317ARR	NEW	MARY V. GUTHRIE	D	PALMDALE	CA	APP	0.02	810	243	2	81.5	0
144897	25075	BMLH-19900206KB	KAMP-FM	CBS RADIO EAST INC.	B	LOS ANGELES	CA	LIC	21	1809	246	1	83.6	0
1570426	142301	BNPFT-20130822AFZ	NEW	MARY V. GUTHRIE	D	LANCASTER	CA	APP	0.055	770	247	2	84.3	0
1549625	142301	BNPFT-20030317ARU	NEW	MARY V. GUTHRIE	D	LANCASTER	CA	APP	0.02	763	247	2	84.9	0
1144816	28848	BLH-20060926AHF	KXOL-FM	KXOL LICENSING, INC.	B	LOS ANGELES	CA	LIC	6.6	848	242	3	101.2	0
1449044	67029	BLH-20111019ACI	KXCM	COPPER MOUNTAIN BROADCASTING COMPANY	A	JOSHUA TREE	CA	LIC	6	952	242	3	102.6	0
1488389	190224	BNPH-20120221ACZ	NEW	GRENAX BROADCASTING II, LLC	C2	MUNDS PARK	AZ	APP	5	2622	246	1	524.8	0
1198753	150097	BLFT-20070806AAT	K246BI	RADIO ASSIST MINISTRY, INC.	D	WINSLOW	AZ	LIC	0.025	1483	246	1	599.4	0
1419081	37577	BSTA-20110228ADC	KRDE	LINDA C. CORSO	C1	SAN CARLOS	AZ	APP	2.1	2378	247	2	605	0
1399096	11894	BLH-20100928ADE	KIKO-FM	1TV.COM, INC.	C2	CLAYPOOL	AZ	LIC	0.67	2352	247	2	605.8	0

