

EXHIBIT 7  
(Page 1 of 4)

NONIONIZING RADIATION COMPLIANCE

Magnum Radio, Inc.  
Tomah, WI

The proposed WDLS-LP Channel 51 displacement facilities will fully comply with the current FCC Standard with regard to human exposure to nonionizing radiation. The proposed antenna will be a Jampro JA/LS-AO-32 directional antenna that will be mounted at the 143.2 meter level on an existing 152 meter tower. Table 7.0 and Figure 7.0 present the vertical radiation pattern for the proposed antenna. Equation (2), found on Page 30 of Supplement A to FCC OET Bulletin No. 65, details the calculation technique used to determine the power density at the base of a TV broadcast tower. Using this vertical radiation pattern and assuming a maximum peak visual effective radiated power of 150 kilowatts and a maximum aural effective radiated power of 15.0 kilowatts, this equation predicts a worst case power density level at two meters above ground level of  $1.43 \mu\text{W}/\text{cm}^2$ , which will occur at a distance of 12.4 meters from the base of this tower. Since the permitted power density for uncontrolled exposure to nonionizing radiation on Channel 51 is  $461.3 \mu\text{W}/\text{cm}^2$ , this amounts to only 0.31% of the permitted level. Since this value is less than 5% of the permitted level, the proposed WDLS-LP facilities are excluded from environmental processing and need not be considered in conjunction with other co-located and nearby facilities to establish compliance with the FCC's exposure standard.

WDLS-LP will also take appropriate steps to insure that workers that must climb this tower will not be exposed to levels of nonionizing radiation that are in excess of the permitted level for controlled exposure. These steps will include the cessation of operation or a reduction in power, as appropriate, when work becomes necessary on this

EXHIBIT 7  
(Page 2 of 4)

tower in the areas where the power density levels will be in excess of the permitted level for controlled exposure.

TABLE OF FIELD STRENGTH FOR : WDLSP.ELV

		INCREMENTAL DEGREES									
		0	1	2	3	4	5	6	7	8	9
+-----		-----									
	+	.882	.214	.223	.055	.141	.028	.096	.041	.058	.050
	-	.882	.882	.214	.221	.055	.141	.027	.095	.040	.059
D	-10	.049	.030	.048	.016	.044	.016	.041	.014	.039	.015
E	-20	.033	.019	.025	.021	.022	.020	.021	.022	.020	.022
G	-30	.022	.017	.025	.012	.025	.010	.025	.002	.024	.012
R	-40	.020	.019	.015	.026	.004	.026	.022	.010	.028	.016
E	-50	.019	.026	.008	.022	.028	.007	.021	.030	.016	.019
E	-60	.034	.026	.009	.029	.042	.033	.008	.023	.043	.048
S	-70	.037	.018	.026	.044	.055	.055	.043	.028	.022	.035
	-80	.054	.071	.084	.093	.105	.107	.105	.101	.104	.097
	-90	.088									

TABLE 7.0

VERTICAL RADIATION PATTERN

Magnum Radio, Inc.  
Tomah, WI

Frequency: <MHz> 693.26

File Name:WDLSLP.ELU

JAMPRO ANTENNAS INC.

Bays : 32

ELEVATION PATTERN

Spacing (Wavelength): 1.00

Model : SLOT

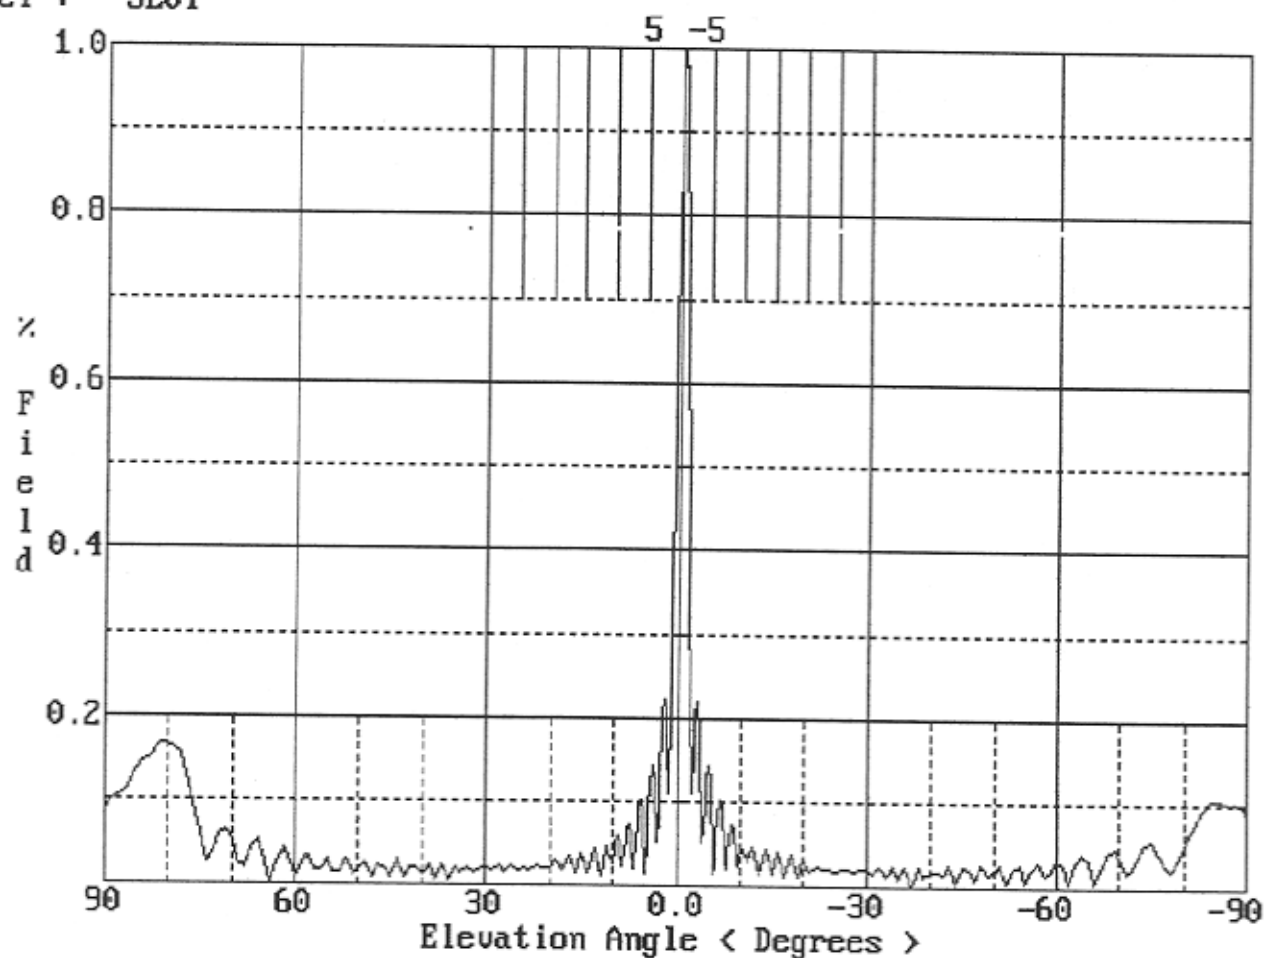


FIG. 7.0

VERTICAL RADIATION PATTERN

Magnum Radio, Inc.  
Tomah, WI