

**Exhibit 11 Page 1**  
**Outreach for Jesus**  
**Second-Adjacent Waiver Request**  
**Somerset, KY**

The proposed LPFM station will broadcast on channel 232, which is within the 53 kilometers second-adjacent minimum distance separation of station WSEK on channel 230. The WSEK interfering contour at the LPFM tower site is 82.9 dBμ F(50,50). Using the ratio of 100:1 (LPFM to WSEK) on the second-adjacent channel, the population within the proposed LPFM 122.9 dBμ contour is zero. Using the antenna manufacturer's vertical radiation pattern the area of interference can be more accurately calculated geometrically, rather than just by using the free space equation alone. This particular antenna is a one bay full-wave spaced Nicom BKG77 antenna. It was determined from the manufacturer's vertical plan that at 40 degrees below horizontal the interference area would extend 16.7 meters toward the ground and extend 19.9 meters horizontally. We have proposed the antenna radiation center will be 20 meters above ground with an Effective Radiated Power of 57 watts, thus the interference area will not reach the ground. Further, there are no occupied structures or elevated roadways within the interference area. Therefore, the application is in compliance with §73.807(e)(1) *Waiver of the second-adjacent channel separations.*

## Antenna Height Above Average Terrain Calculations -- Results

### Input Data

Latitude **37° 4' 23"** North

Longitude **84° 37' 16"** West (NAD 27)

These coordinates convert to NAD 83 coordinates of  
37° 04' 23.28", North, 84° 37' 15.79" West (NAD 83).

Height of antenna radiation center above mean sea level: **342** meters AMSL

Number of Evenly Spaced Radials = **8**      0° is referenced to True North

### Results

Calculated HAAT = **40 meters**

Antenna Height Above Average Terrain calculated  
using 1 km [GLOBE terrain data](#)

#### Individual "Radial HAAT" Values, in meters

0°	12.6 m
45°	23.2 m
90°	23.3 m
135°	43.3 m
180°	76.2 m
225°	71.6 m
270°	35.5 m
315°	37.6 m

Print Results?

New Calculation?

## Exhibit 11 Figure 2


### Minimum Ground Clearance

Depression Angle Below Horizontal	Antenna Relative Field	ERP (Watts)	Distance to interfering Contour from Antenna (m)	Horizontal Distance of Interfering contour from tower (m)	Vertical Clearance of Interfering contour above TGL (m)
5	0.999	56.9	38	37.9	16.7
10	0.982	55.0	37	36.4	13.6
15	0.954	51.9	36	34.8	10.7
20	0.918	48.0	35	32.9	8.0
25	0.872	43.3	33	29.9	6.1
30	0.818	38.1	31	26.8	4.5
35	0.758	32.8	29	23.8	3.4
40	0.691	27.2	26	19.9	3.3
45	0.616	21.6	23	16.3	3.7
50	0.538	16.5	20	12.9	4.7
55	0.465	12.3	18	10.3	5.3
60	0.391	8.7	15	7.5	7.0
65	0.313	5.6	12	5.1	9.1
70	0.239	3.3	9	3.1	11.5
75	0.176	1.8	7	1.8	13.2
80	0.129	0.9	5	0.9	15.1
85	0.103	0.6	4	0.3	16.0
90	0.104	0.6	4	0.0	16.0
Minimum Clearance above TGL:					3.3 m

TX station:

Site name: 1 BAY ANTENNA

Frequency: 100.00 MHz

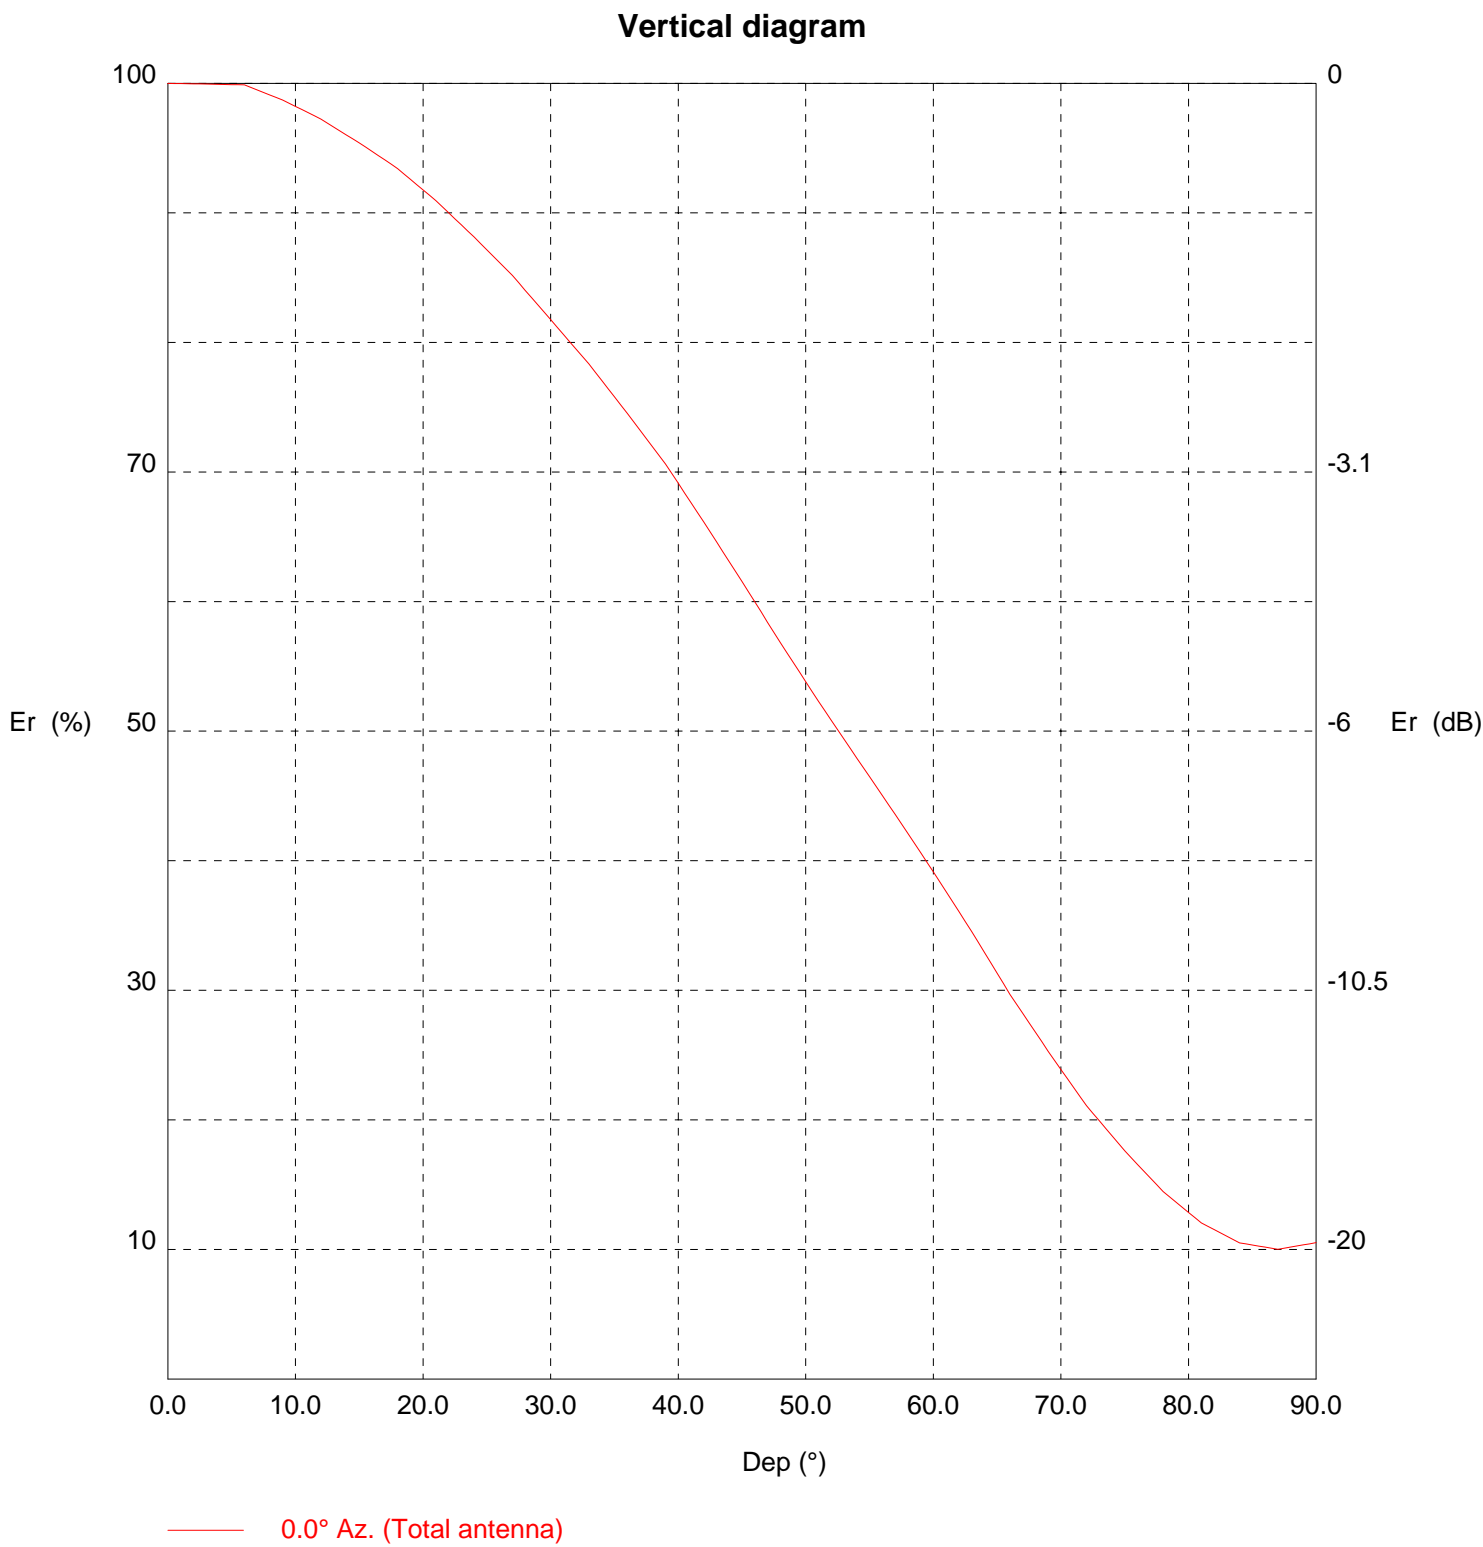

TX station:

Site name: 1 BAY ANTENNA

Frequency: 100.00 MHz

## Vertical diagram at an azimuth of 0° degrees

Dep (°)	Er (%)	ERP (W)	Dep (°)	Er (%)	ERP (W)	Dep (°)	Er (%)	ERP (W)
0.0	100.0	373.6	30.0	81.8	249.8	60.0	39.1	57.2
0.5	100.0	373.6	30.5	81.2	246.3	60.5	38.4	55.0
1.0	100.0	373.5	31.0	80.6	242.9	61.0	37.6	52.8
1.5	100.0	373.4	31.5	80.1	239.5	61.5	36.8	50.7
2.0	100.0	373.4	32.0	79.5	236.1	62.0	36.1	48.6
2.5	100.0	373.3	32.5	78.9	232.7	62.5	35.3	46.6
3.0	99.9	373.3	33.0	78.3	229.3	63.0	34.5	44.6
3.5	99.9	373.2	33.5	77.7	225.6	63.5	33.7	42.5
4.0	99.9	373.1	34.0	77.1	222.0	64.0	32.9	40.5
4.5	99.9	373.0	34.5	76.4	218.3	64.5	32.1	38.6
5.0	99.9	372.9	35.0	75.8	214.7	65.0	31.3	36.6
5.5	99.9	372.8	35.5	75.2	211.1	65.5	30.5	34.8
6.0	99.9	372.8	36.0	74.5	207.6	66.0	29.7	33.0
6.5	99.7	371.3	36.5	73.9	204.0	66.5	29.0	31.4
7.0	99.5	369.9	37.0	73.2	200.4	67.0	28.2	29.8
7.5	99.3	368.4	37.5	72.6	196.8	67.5	27.5	28.3
8.0	99.1	367.0	38.0	71.9	193.3	68.0	26.8	26.8
8.5	98.9	365.5	38.5	71.3	189.8	68.5	26.0	25.3
9.0	98.7	364.1	39.0	70.6	186.3	69.0	25.3	23.9
9.5	98.5	362.3	39.5	69.9	182.4	69.5	24.6	22.6
10.0	98.2	360.5	40.0	69.1	178.6	70.0	23.9	21.3
10.5	98.0	358.7	40.5	68.4	174.7	70.5	23.2	20.1
11.0	97.7	356.9	41.0	67.6	170.9	71.0	22.5	18.9
11.5	97.5	355.1	41.5	66.9	167.2	71.5	21.8	17.7
12.0	97.2	353.3	42.0	66.1	163.5	72.0	21.1	16.6
12.5	96.9	351.1	42.5	65.4	159.7	72.5	20.5	15.7
13.0	96.6	348.9	43.0	64.6	156.0	73.0	19.9	14.8
13.5	96.3	346.7	43.5	63.9	152.3	73.5	19.3	14.0
14.0	96.0	344.5	44.0	63.1	148.7	74.0	18.8	13.2
14.5	95.7	342.3	44.5	62.3	145.1	74.5	18.2	12.4
15.0	95.4	340.1	45.0	61.6	141.6	75.0	17.6	11.6
15.5	95.1	337.8	45.5	60.8	138.0	75.5	17.1	10.9
16.0	94.7	335.4	46.0	60.0	134.4	76.0	16.6	10.2
16.5	94.4	333.1	46.5	59.2	130.9	76.5	16.0	9.6
17.0	94.1	330.8	47.0	58.4	127.5	77.0	15.5	9.0
17.5	93.8	328.4	47.5	57.6	124.1	77.5	15.0	8.4
18.0	93.4	326.1	48.0	56.8	120.7	78.0	14.5	7.8
18.5	93.0	323.3	48.5	56.1	117.5	78.5	14.1	7.4
19.0	92.6	320.4	49.0	55.3	114.4	79.0	13.7	7.0
19.5	92.2	317.5	49.5	54.6	111.3	79.5	13.3	6.6
20.0	91.8	314.7	50.0	53.8	108.2	80.0	12.9	6.2
20.5	91.4	311.9	50.5	53.1	105.2	80.5	12.5	5.8
21.0	91.0	309.1	51.0	52.3	102.2	81.0	12.0	5.4
21.5	90.5	305.9	51.5	51.6	99.4	81.5	11.8	5.2
22.0	90.0	302.7	52.0	50.8	96.6	82.0	11.5	5.0
22.5	89.5	299.6	52.5	50.1	93.8	82.5	11.3	4.8
23.0	89.1	296.5	53.0	49.4	91.1	83.0	11.0	4.5
23.5	88.6	293.4	53.5	48.6	88.4	83.5	10.8	4.3
24.0	88.1	290.3	54.0	47.9	85.8	84.0	10.5	4.1
24.5	87.6	287.0	54.5	47.2	83.2	84.5	10.4	4.1
25.0	87.2	283.8	55.0	46.5	80.7	85.0	10.3	4.0
25.5	86.7	280.6	55.5	45.7	78.2	85.5	10.3	3.9
26.0	86.2	277.4	56.0	45.0	75.7	86.0	10.2	3.9
26.5	85.7	274.2	56.5	44.3	73.3	86.5	10.1	3.8
27.0	85.2	271.1	57.0	43.6	71.0	87.0	10.0	3.7
27.5	84.6	267.5	57.5	42.8	68.6	87.5	10.1	3.8
28.0	84.0	263.9	58.0	42.1	66.2	88.0	10.2	3.9
28.5	83.5	260.3	58.5	41.4	63.9	88.5	10.3	3.9
29.0	82.9	256.8	59.0	40.6	61.6	89.0	10.4	4.0
29.5	82.3	253.3	59.5	39.9	59.4	89.5	10.4	4.1

**Exhibit 11A Figure 5**  
**Aerial Photo of the 19.9 Meter Vicinity Surrounding the Proposed Tower Site**

