

Exhibit #13
Glades Media Company, LLC
Aerial Photo of Tower Location


Registration
Number: 1040895
Structure
Coordinates:
27-56-36 N
81-54-44 W

60 Meter Clear Area

50 feet 25 m

© 2013 Microsoft Corporation Available Exclusively by DigitalGlobe

BEXT TFC2K 3-Bay Full Wave Spaced Frequency: 102.9 MHz

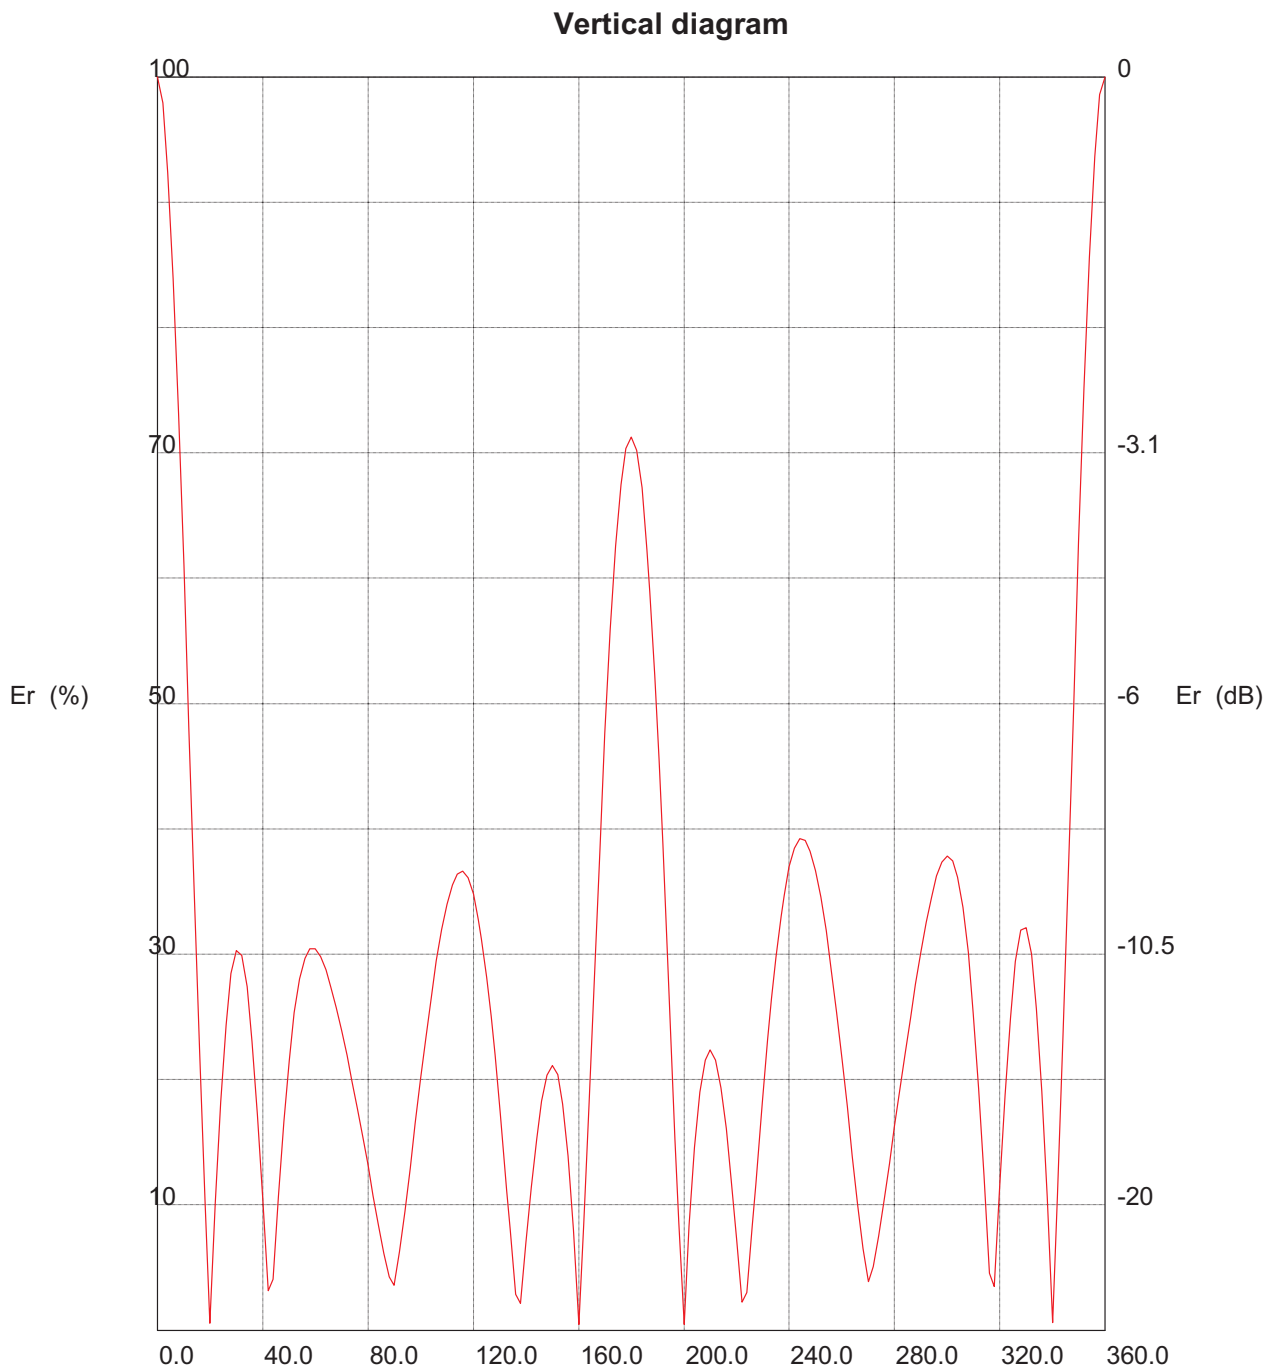

Frequency: 102.9 MHz

Vertical diagram at an azimuth of 0°

Dep (°)	Er (%)	ERP (W)	Dep (°)	Er (%)	ERP (W)	Dep (°)	Er (%)	ERP (W)
0.0	100.0	1.3	120.0	34.8	0.2	240.0	37.0	0.2
2.0	97.9	1.3	122.0	32.7	0.1	242.0	38.5	0.2
4.0	92.3	1.2	124.0	29.9	0.1	244.0	39.2	0.2
6.0	83.9	1.0	126.0	26.5	0.1	246.0	39.1	0.2
8.0	73.2	0.7	128.0	22.4	0.1	248.0	38.2	0.2
10.0	61.0	0.5	130.0	17.9	0.0	250.0	36.7	0.2
12.0	48.1	0.3	132.0	13.1	0.0	252.0	34.5	0.2
14.0	35.0	0.2	134.0	8.0	0.0	254.0	31.9	0.1
16.0	22.3	0.1	136.0	2.9	0.0	256.0	28.8	0.1
18.0	10.3	0.0	138.0	2.2	0.0	258.0	25.4	0.1
20.0	0.6	0.0	140.0	7.0	0.0	260.0	21.7	0.1
22.0	10.2	0.0	142.0	11.4	0.0	262.0	17.8	0.0
24.0	18.2	0.0	144.0	15.2	0.0	264.0	13.9	0.0
26.0	24.4	0.1	146.0	18.3	0.0	266.0	10.0	0.0
28.0	28.5	0.1	148.0	20.3	0.1	268.0	6.5	0.0
30.0	30.3	0.1	150.0	21.1	0.1	270.0	3.9	0.0
32.0	29.9	0.1	152.0	20.4	0.1	272.0	5.1	0.0
34.0	27.4	0.1	154.0	18.0	0.0	274.0	7.5	0.0
36.0	23.0	0.1	156.0	13.9	0.0	276.0	10.3	0.0
38.0	17.2	0.0	158.0	8.0	0.0	278.0	13.3	0.0
40.0	10.4	0.0	160.0	0.5	0.0	280.0	16.2	0.0
42.0	3.1	0.0	162.0	8.4	0.0	282.0	19.2	0.0
44.0	4.0	0.0	164.0	18.1	0.0	284.0	22.1	0.1
46.0	10.8	0.0	166.0	28.3	0.1	286.0	24.9	0.1
48.0	16.7	0.0	168.0	38.3	0.2	288.0	27.6	0.1
50.0	21.5	0.1	170.0	47.7	0.3	290.0	30.2	0.1
52.0	25.3	0.1	172.0	55.9	0.4	292.0	32.5	0.1
54.0	28.0	0.1	174.0	62.5	0.5	294.0	34.6	0.2
56.0	29.7	0.1	176.0	67.4	0.6	296.0	36.2	0.2
58.0	30.4	0.1	178.0	70.4	0.7	298.0	37.4	0.2
60.0	30.4	0.1	180.0	71.2	0.7	300.0	37.8	0.2
62.0	29.8	0.1	182.0	70.2	0.7	302.0	37.5	0.2
64.0	28.8	0.1	184.0	67.2	0.6	304.0	36.1	0.2
66.0	27.4	0.1	186.0	62.3	0.5	306.0	33.7	0.2
68.0	25.7	0.1	188.0	55.7	0.4	308.0	30.1	0.1
70.0	23.9	0.1	190.0	47.6	0.3	310.0	25.3	0.1
72.0	21.9	0.1	192.0	38.5	0.2	312.0	19.3	0.1
74.0	19.9	0.1	194.0	28.6	0.1	314.0	12.3	0.0
76.0	17.7	0.0	196.0	18.5	0.0	316.0	4.6	0.0
78.0	15.4	0.0	198.0	8.6	0.0	318.0	3.5	0.0
80.0	13.1	0.0	200.0	0.5	0.0	320.0	11.5	0.0
82.0	10.8	0.0	202.0	8.3	0.0	322.0	18.8	0.0
84.0	8.4	0.0	204.0	14.6	0.0	324.0	24.9	0.1
86.0	6.1	0.0	206.0	19.0	0.0	326.0	29.4	0.1
88.0	4.2	0.0	208.0	21.6	0.1	328.0	31.9	0.1
90.0	3.6	0.0	210.0	22.3	0.1	330.0	32.1	0.1
92.0	6.3	0.0	212.0	21.5	0.1	332.0	30.0	0.1
94.0	9.5	0.0	214.0	19.3	0.1	334.0	25.6	0.1
96.0	13.0	0.0	216.0	16.1	0.0	336.0	19.1	0.0
98.0	16.5	0.0	218.0	12.0	0.0	338.0	10.7	0.0
100.0	20.0	0.1	220.0	7.3	0.0	340.0	0.6	0.0
102.0	23.4	0.1	222.0	2.3	0.0	342.0	10.8	0.0
104.0	26.6	0.1	224.0	3.0	0.0	344.0	23.2	0.1
106.0	29.5	0.1	226.0	8.4	0.0	346.0	36.4	0.2
108.0	32.0	0.1	228.0	13.6	0.0	348.0	49.8	0.3
110.0	34.0	0.2	230.0	18.7	0.0	350.0	62.9	0.5
112.0	35.5	0.2	232.0	23.5	0.1	352.0	75.1	0.8
114.0	36.4	0.2	234.0	27.8	0.1	354.0	85.6	1.0
116.0	36.6	0.2	236.0	31.6	0.1	356.0	93.6	1.2
118.0	36.1	0.2	238.0	34.6	0.2	358.0	98.6	1.3

3-bay Full Wave Spaced Circularly Polarized FM Antenna

Frequency =	102.9	Mhz	ERP Watts =	240
Interfering Contour	107.7	dBu (50,10)	HAGL(m)=	119

Degrees	Rel. Field	Power	Distance to Contour	Degrees	Rel. Field	Power	Distance to Contour	
1	0.999	239.5	447.3744	46	0.108	2.8	48.3648	
2	0.979	230.0	438.4179	47	0.138	4.6	61.7995	
3	0.951	217.1	425.8789	48	0.167	6.7	74.7863	
4	0.923	204.5	413.3399	49	0.196	9.2	87.7732	
5	0.876	184.2	392.2922	50	0.215	11.1	96.2818	
6	0.839	168.9	375.7228	51	0.231	12.8	103.4469	
7	0.785	147.9	351.5404	52	0.253	15.4	113.2990	
8	0.732	128.6	327.8059	53	0.269	17.4	120.4642	
9	0.666	106.5	298.2496	54	0.280	18.8	125.3902	
10	0.610	89.3	273.1715	55	0.286	19.6	128.0771	
11	0.549	72.3	245.8544	56	0.297	21.2	133.0032	
12	0.481	55.5	215.4025	57	0.301	21.7	134.7945	
13	0.410	40.3	183.6071	58	0.304	22.2	136.1379	
14	0.350	29.4	156.7378	59	0.304	22.2	136.1379	
15	0.286	19.6	128.0771	60	0.304	22.2	136.1379	
16	0.223	11.9	99.8644	61	0.301	21.7	134.7945	
17	0.163	6.4	72.9950	62	0.298	21.3	133.4510	
18	0.103	2.5	46.1257	63	0.293	20.6	131.2119	
19	0.081	1.6	36.2736	64	0.288	19.9	128.9728	
20	0.060	0.9	26.8693	65	0.281	19.0	125.8380	
21	0.081	1.6	36.2736	66	0.274	18.0	122.7033	
22	0.102	2.5	45.6779	67	0.265	16.9	118.6729	
23	0.142	4.8	63.5908	68	0.257	15.9	115.0903	
24	0.182	7.9	81.5036	69	0.248	14.8	111.0599	
25	0.201	9.7	90.0123	70	0.239	13.7	107.0295	
26	0.224	12.0	100.3122	71	0.189	8.6	84.6384	
27	0.253	15.4	113.2990	72	0.219	11.5	98.0731	
28	0.285	19.5	127.6293	73	0.209	10.5	93.5948	
29	0.294	20.7	131.6597	74	0.199	9.5	89.1166	
30	0.303	22.0	135.6901	75	0.188	8.5	84.1906	
31	0.301	21.7	134.7945	76	0.177	7.5	79.2645	
32	0.299	21.5	133.8988	77	0.155	5.8	69.4124	
33	0.287	19.8	128.5250	78	0.154	5.7	68.9646	
34	0.274	18.0	122.7033	79	0.137	4.5	61.3516	
35	0.252	15.2	112.8512	80	0.131	4.1	58.6647	
36	0.230	12.7	102.9991	81	0.116	3.2	51.9474	
37	0.201	9.7	90.0123	82	0.108	2.8	48.3648	
38	0.172	7.1	77.0254	83	0.093	2.1	41.6475	
39	0.136	4.4	60.9038	84	0.084	1.7	37.6171	
40	0.104	2.6	46.5735	85	0.069	1.1	30.8997	
41	0.067	1.1	30.0041	86	0.061	0.9	27.3172	
42	0.031	0.2	13.8825	87	0.051	0.6	22.8389	
43	0.035	0.3	15.6738	88	0.042	0.4	18.8085	
44	0.040	0.4	17.9129	89	0.039	0.4	17.4651	
45	0.074	1.3	33.1388	90	0.036	0.3	16.1216	

3-bay Full Wave Spaced Circularly Polarized FM Antenna

Frequency =	102.9	Mhz	ERP Watts =	240
Interfering Contour	119.3	dBu (50,10)	HAGL(m)=	119

Degrees	Rel. Field	Power	Distance to Contour	Degrees	Rel. Field	Power	Distance to Contour	
1	0.999	239.5	117.6715	46	0.108	2.8	12.7212	
2	0.979	230.0	115.3157	47	0.138	4.6	16.2549	
3	0.951	217.1	112.0176	48	0.167	6.7	19.6708	
4	0.923	204.5	108.7195	49	0.196	9.2	23.0867	
5	0.876	184.2	103.1834	50	0.215	11.1	25.3247	
6	0.839	168.9	98.8252	51	0.231	12.8	27.2093	
7	0.785	147.9	92.4646	52	0.253	15.4	29.8007	
8	0.732	128.6	86.2217	53	0.269	17.4	31.6853	
9	0.666	106.5	78.4476	54	0.280	18.8	32.9810	
10	0.610	89.3	71.8514	55	0.286	19.6	33.6877	
11	0.549	72.3	64.6663	56	0.297	21.2	34.9834	
12	0.481	55.5	56.6566	57	0.301	21.7	35.4546	
13	0.410	40.3	48.2936	58	0.304	22.2	35.8079	
14	0.350	29.4	41.2262	59	0.304	22.2	35.8079	
15	0.286	19.6	33.6877	60	0.304	22.2	35.8079	
16	0.223	11.9	26.2670	61	0.301	21.7	35.4546	
17	0.163	6.4	19.1996	62	0.298	21.3	35.1012	
18	0.103	2.5	12.1323	63	0.293	20.6	34.5122	
19	0.081	1.6	9.5409	64	0.288	19.9	33.9233	
20	0.060	0.9	7.0674	65	0.281	19.0	33.0988	
21	0.081	1.6	9.5409	66	0.274	18.0	32.2743	
22	0.102	2.5	12.0145	67	0.265	16.9	31.2141	
23	0.142	4.8	16.7261	68	0.257	15.9	30.2718	
24	0.182	7.9	21.4376	69	0.248	14.8	29.2117	
25	0.201	9.7	23.6756	70	0.239	13.7	28.1516	
26	0.224	12.0	26.3848	71	0.189	8.6	22.2622	
27	0.253	15.4	29.8007	72	0.219	11.5	25.7958	
28	0.285	19.5	33.5699	73	0.209	10.5	24.6180	
29	0.294	20.7	34.6300	74	0.199	9.5	23.4401	
30	0.303	22.0	35.6901	75	0.188	8.5	22.1444	
31	0.301	21.7	35.4546	76	0.177	7.5	20.8487	
32	0.299	21.5	35.2190	77	0.155	5.8	18.2573	
33	0.287	19.8	33.8055	78	0.154	5.7	18.1395	
34	0.274	18.0	32.2743	79	0.137	4.5	16.1371	
35	0.252	15.2	29.6829	80	0.131	4.1	15.4304	
36	0.230	12.7	27.0915	81	0.116	3.2	13.6636	
37	0.201	9.7	23.6756	82	0.108	2.8	12.7212	
38	0.172	7.1	20.2597	83	0.093	2.1	10.9544	
39	0.136	4.4	16.0193	84	0.084	1.7	9.8943	
40	0.104	2.6	12.2501	85	0.069	1.1	8.1275	
41	0.067	1.1	7.8919	86	0.061	0.9	7.1851	
42	0.031	0.2	3.6515	87	0.051	0.6	6.0073	
43	0.035	0.3	4.1226	88	0.042	0.4	4.9471	
44	0.040	0.4	4.7116	89	0.039	0.4	4.5938	
45	0.074	1.3	8.7164	90	0.036	0.3	4.2404	