

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.

WEAF AM RADIO STATION

has: 1130 kHz - 0.007/1.0 kW ND

CAMDEN, SOUTH CAROLINA

req: 1130 kHz - 0.009/1.0 kW ND

SPRINGDALE, SOUTH CAROLINA

January 2007

EXHIBIT #2A

AM Broadcast Allocation Study

LATITUDE 33:57:34 LONGITUDE 81: 2:28

FACTORS AFFECTING 1130 kHz

01-10-2007


***** 1100 KHZ *****												
KM	(MI)	DEGREES	LATITUDE/LONGITUDE	TY	SH	CL	KW	ANTENNA	CALL	CO	ST	CITY
815.11	(506.49)	356.6	41:16:50/ 81:37:22	LI	U	A	50.00	ND1-2742.5	WTAM	US	OH	CLEVELAND
						170	KILOMETERS					
CLASS A												
***** 1110 KHZ *****												
KM	(MI)	DEGREES	LATITUDE/LONGITUDE	TY	SH	CL	KW	ANTENNA	CALL	CO	ST	CITY
131.05	(81.43)	6.0	35: 7:56/ 80:53:23	LI	D	A	50.00	DAN-2651.5	WBT	US	NC	CHARLOTTE
1536.45	(954.70)	305.5	41: 7:11/ 96: 0: 6	LI	D	A	50.00	DAN-2674.3	KFAB	US	NE	OMAHA
						334	KILOMETERS					
CLASS A												
***** 1120 KHZ *****												
KM	(MI)	DEGREES	LATITUDE/LONGITUDE	TY	SH	CL	KW	ANTENNA	CALL	CO	ST	CITY
257.42	(159.95)	242.1	32:50:59/ 83:28:38	LI	D	D	10.00	NDD- 926.2	WXJO	US	GA	GORDON
257.42	(159.95)	242.1	32:50:59/ 83:28:38	LI	C	D	2.50	NDD- 463.1	WXJO	US	GA	GORDON
325.14	(202.03)	310.8	35:50:32/ 83:46:21	LI	D		1.00	NDD- 297.7	WKCE	US	TN	MARYVILLE
334.42	(207.80)	272.4	34: 1:47/ 84:40:13	CP	D		10.00	DAD- 919.2	WXJO	US	GA	SMYRNA
344.19	(213.87)	333.0	36:42:30/ 82:47:30	LI	D	D	1.00	NDD- 306.0	WDUF	US	VA	DUFFIELD
354.98	(220.57)	75.2	34:43: 3/ 77:16:57	LI	D		6.00	NDD- 695.7	WSME	US	NC	CAMP LEJEUNE
354.98	(220.57)	75.2	34:43: 3/ 77:16:57	LI	C		4.20	NDD- 582.0	WSME	US	NC	CAMP LEJEUNE
446.21	(277.26)	266.4	33:36:50/ 85:51:19	LI	D	D	0.50	NDD- 202.6	WHOG	US	AL	HOBSON CITY
558.26	(346.89)	182.9	28:56:30/ 81:20: 6	AP	D		15.00	DAN-1155.4	NEW	US	FL	ORANGE CITY
558.26	(346.89)	182.9	28:56:30/ 81:20: 6	AP	C		8.00	DAN- 843.8	NEW	US	FL	ORANGE CITY
638.51	(396.75)	234.6	30:30:34/ 86:28:34	LI	D	D	1.00	NDD- 286.7	WNWF	US	FL	DESTIN
647.91	(402.60)	176.9	28: 8:11/ 80:41:20	AP	D		1.00	DA2- 341.9	NEW	US	FL	MELBOURNE
647.91	(402.60)	176.9	28: 8:11/ 80:41:20	AP	D		1.00	DA2- 341.9	NEW	US	FL	MELBOURNE
649.44	(403.54)	31.1	38:54:15/ 77: 9:54	LI	D	D	20.00	NDD-1338.7	WUST	US	DC	WASHINGTON
649.44	(403.54)	31.1	38:54:15/ 77: 9:54	LI	C	D	3.00	NDD- 518.5	WUST	US	DC	WASHINGTON
						689	KILOMETERS					
***** 1130 KHZ *****												
KM	(MI)	DEGREES	LATITUDE/LONGITUDE	TY	SH	CL	KW	ANTENNA	CALL	CO	ST	CITY
979.93	(608.90)	37.0	40:48:39/ 74: 2:24	LI	D	A	50.00	DAN-2685.7	WBRR	US	NY	NEW YORK
1199.45	(745.31)	266.9	32:42:18/ 93:52:55	LI	D	A	50.00	DAN-2890.4	KWKH	US	LA	SHREVEPORT
3817.71	(2372.21)	309.1	49: 9:22/123: 4: 0	--	D	1B	50.00	DA2-2096.0	CKWX	CA	BC	VANCOUVER
							CLASS 1B					
53.94	(33.51)	51.8	34:15:32/ 80:34:47	LI	D		1.00	ND2- 299.3	WEAF	US	SC	CAMDEN
53.94	(33.51)	51.8	34:15:32/ 80:34:47	CP	D		5.00	ND3- 669.3	WEAF	US	SC	CAMDEN
53.94	(33.51)	51.8	34:15:32/ 80:34:47	CP	C		3.20	ND3- 535.5	WEAF	US	SC	CAMDEN
197.69	(122.84)	171.3	32:12: 1/ 80:43:27	LI	D	B	1.00	DAN- 299.3	WFXH	US	SC	HILTON HEAD ISLAND
248.46	(154.39)	341.6	36: 4:39/ 81:54:59	LI	D	D	1.00	NDD- 363.7	WECR	US	NC	NEWLAND
254.06	(157.87)	278.8	34:16:45/ 83:46:33	LI	C	D	1.00	NDD- 416.8	WLBA	US	GA	GAINESVILLE
254.06	(157.87)	278.8	34:16:45/ 83:46:33	LI	D	D	10.00	NDD-1318.1	WLBA	US	GA	GAINESVILLE
274.38	(170.49)	54.7	35:21:39/ 78:34: 9	LI	D		6.50	ND2- 738.5	WPYB	US	NC	BENSON
274.38	(170.49)	54.7	35:21:39/ 78:34: 9	LI	C		1.00	ND2- 289.7	WPYB	US	NC	BENSON
307.43	(191.03)	21.8	36:31:21/ 79:45:55	LI	D	D	1.00	NDD- 305.8	WCLW	US	NC	EDEN

444.99	(276.51)	3.1	37:57:28/ 80:45:45	LI D	D	1.00	NDD-	301.0	WRR	US	WV	RAINELLE
475.08	(295.20)	252.2	32:33:22/ 85:52:17	LI D	D	1.00	NDD-	288.1	WACQ	US	AL	CARRVILLE
484.46	(301.03)	251.2	32:27:17/ 85:55:57	AP D		25.00	ND2-	1528.8	WACQ	US	AL	CARRVILLE
484.46	(301.03)	251.2	32:27:17/ 85:55:57	AP C		1.00	ND2-	305.8	WACQ	US	AL	CARRVILLE
561.89	(349.14)	300.5	36:24:38/ 86:27:16	LI D	D	2.30	NDD-	453.9	WYXE	US	TN	GALLATIN
561.89	(349.14)	300.5	36:24:38/ 86:27:16	LI C	D	0.94	NDD-	290.2	WYXE	US	TN	GALLATIN
676.50	(420.36)	186.6	27:54:31/ 81:49:33	LI D	B	2.50	DAN-	473.3	WWBF	US	FL	BARTOW
683.39	(424.64)	8.1	40: 2:33/ 79:54:20	LI C	D	1.00	DAD-	313.8	WASP	US	PA	BROWNSVILLE
683.39	(424.64)	8.1	40: 2:33/ 79:54:20	LI D	D	5.00	DAD-	700.1	WASP	US	PA	BROWNSVILLE
683.45	(424.68)	8.1	40: 2:35/ 79:54:19	AP D		1.00	ND2-	313.8	WASP	US	PA	BROWNSVILLE
683.45	(424.68)	8.1	40: 2:35/ 79:54:19	AP C		1.00	ND2-	313.8	WASP	US	PA	BROWNSVILLE
716.10	(444.96)	335.0	39:44:55/ 84:35: 2	LI D	D	0.25	DAD-	164.0	WEDI	US	OH	EATON
723.70	(449.68)	296.3	36:38: 8/ 88:19:10	LI D		1.50	NDD-	368.6	WJGY	US	KY	MURRAY
821.46	(510.43)	320.4	39:30:44/ 87: 8:18	LI D		0.50	ND2-	227.6	WSDX	US	IN	BRAZIL
855.66	(531.68)	244.6	30:23:21/ 89: 6:23	LI D		1.00	NDD-	304.2	WQFX	US	MS	GULFPORT
925.13	(574.85)	348.9	42: 6:39/ 83:11:52	LI D	B	50.00	DA2-	2253.1	WDFN	US	MI	DETROIT
MAXIMUM SEARCH DISTANCE 978 KILOMETERS												

		***** 1140 KHZ *****											
KM	(MI)	DEGREES	LATITUDE/LONGITUDE	TY	SH	CL	KW	ANTENNA	CALL	CO	ST	CITY	
509.30	(316.47)	40.2	37:24:13/ 77:18:59	LI	U	A	50.00	DA1-	2574.9	WRVA	US	VA	RICHMOND CLASS A
183.90	(114.27)	12.8	35:34:20/ 80:35:21	LI	D	D	1.00	DAD-	322.2	WRNA	US	NC	CHINA GROVE
183.90	(114.27)	12.8	35:34:20/ 80:35:21	LI	C	D	0.25	DAD-	152.9	WRNA	US	NC	CHINA GROVE
343.17	(213.24)	340.9	36:52:15/ 82:18:21	LI	D	D	2.50	NDD-	474.7	WXLZ	US	VA	ST. PAUL
343.17	(213.24)	340.9	36:52:15/ 82:18:21	LI	C	D	1.10	NDD-	314.9	WXLZ	US	VA	ST. PAUL
359.74	(223.53)	304.0	35:43:35/ 84:20:49	LI	D	D	1.00	NDD-	299.3	WL0D	US	TN	LOUDON
459.70	(285.65)	336.9	37:44:58/ 83: 5:19	LI	D	D	1.00	NDD-	282.0	WRLV	US	KY	SALYERSVILLE
525.21	(326.35)	283.7	34:57:11/ 86:38:46	LI	D	D	15.00	DAD-	1243.1	WBXR	US	AL	HAZEL GREEN
525.21	(326.35)	283.7	34:57:11/ 86:38:46	LI	C	D	7.50	DAD-	980.0	WBXR	US	AL	HAZEL GREEN
598.78	(372.06)	183.6	28:34:50/ 81:25:14	CP	D		4.60	DAN-	669.2	WRMQ	US	FL	ORLANDO
598.84	(372.10)	183.6	28:34:48/ 81:25:16	LI	D		5.00	NDD-	670.8	WRMQ	US	FL	ORLANDO
641.42	(398.56)	315.7	37:59: 5/ 86: 9:24	LI	D	D	0.25	NDD-	158.5	WMMG	US	KY	BRANDENBURG
MAXIMUM SEARCH DISTANCE 675 KILOMETERS													

		***** 1150 KHZ *****											
KM	(MI)	DEGREES	LATITUDE/LONGITUDE	TY	SH	CL	KW	ANTENNA	CALL	CO	ST	CITY	
109.98	(68.34)	2.0	34:56:55/ 80:59:58	LI	D		5.00	ND2-	687.3	WAVO	US	SC	ROCK HILL
196.31	(121.98)	294.8	34:41:11/ 82:59:27	LI	D	D	1.00	ND1-	317.0	WSNW	US	SC	SENECA
196.31	(121.98)	294.8	34:41:11/ 82:59:27	AP	D		1.00	ND2-	317.0	WSNW	US	SC	SENECA
279.70	(173.80)	30.7	36: 6:48/ 79:27: 0	LI	D	D	1.00	ND1-	304.2	WBAG	US	NC	BURLINGTON-GRAHAM
307.25	(190.91)	240.8	32:34:34/ 83:54:17	LI	D	D	1.00	ND1-	305.8	WXKO	US	GA	FORT VALLEY
318.35	(197.81)	59.6	35:22:26/ 78: 0:42	LI	D		5.00	DA2-	745.5	WGBR	US	NC	GOLDSBORO
MAXIMUM SEARCH DISTANCE 320 KILOMETERS													

		***** 1160 KHZ *****											
KM	(MI)	DEGREES	LATITUDE/LONGITUDE	TY	SH	CL	KW	ANTENNA	CALL	CO	ST	CITY	
2829.05	(1757.89)	294.7	40:46:46/112: 5:56	LI	U	A	50.00	ND1-	2822.2	KSL	US	UT	SALT LAKE CLASS A
MAXIMUM SEARCH DISTANCE 159 KILOMETERS													

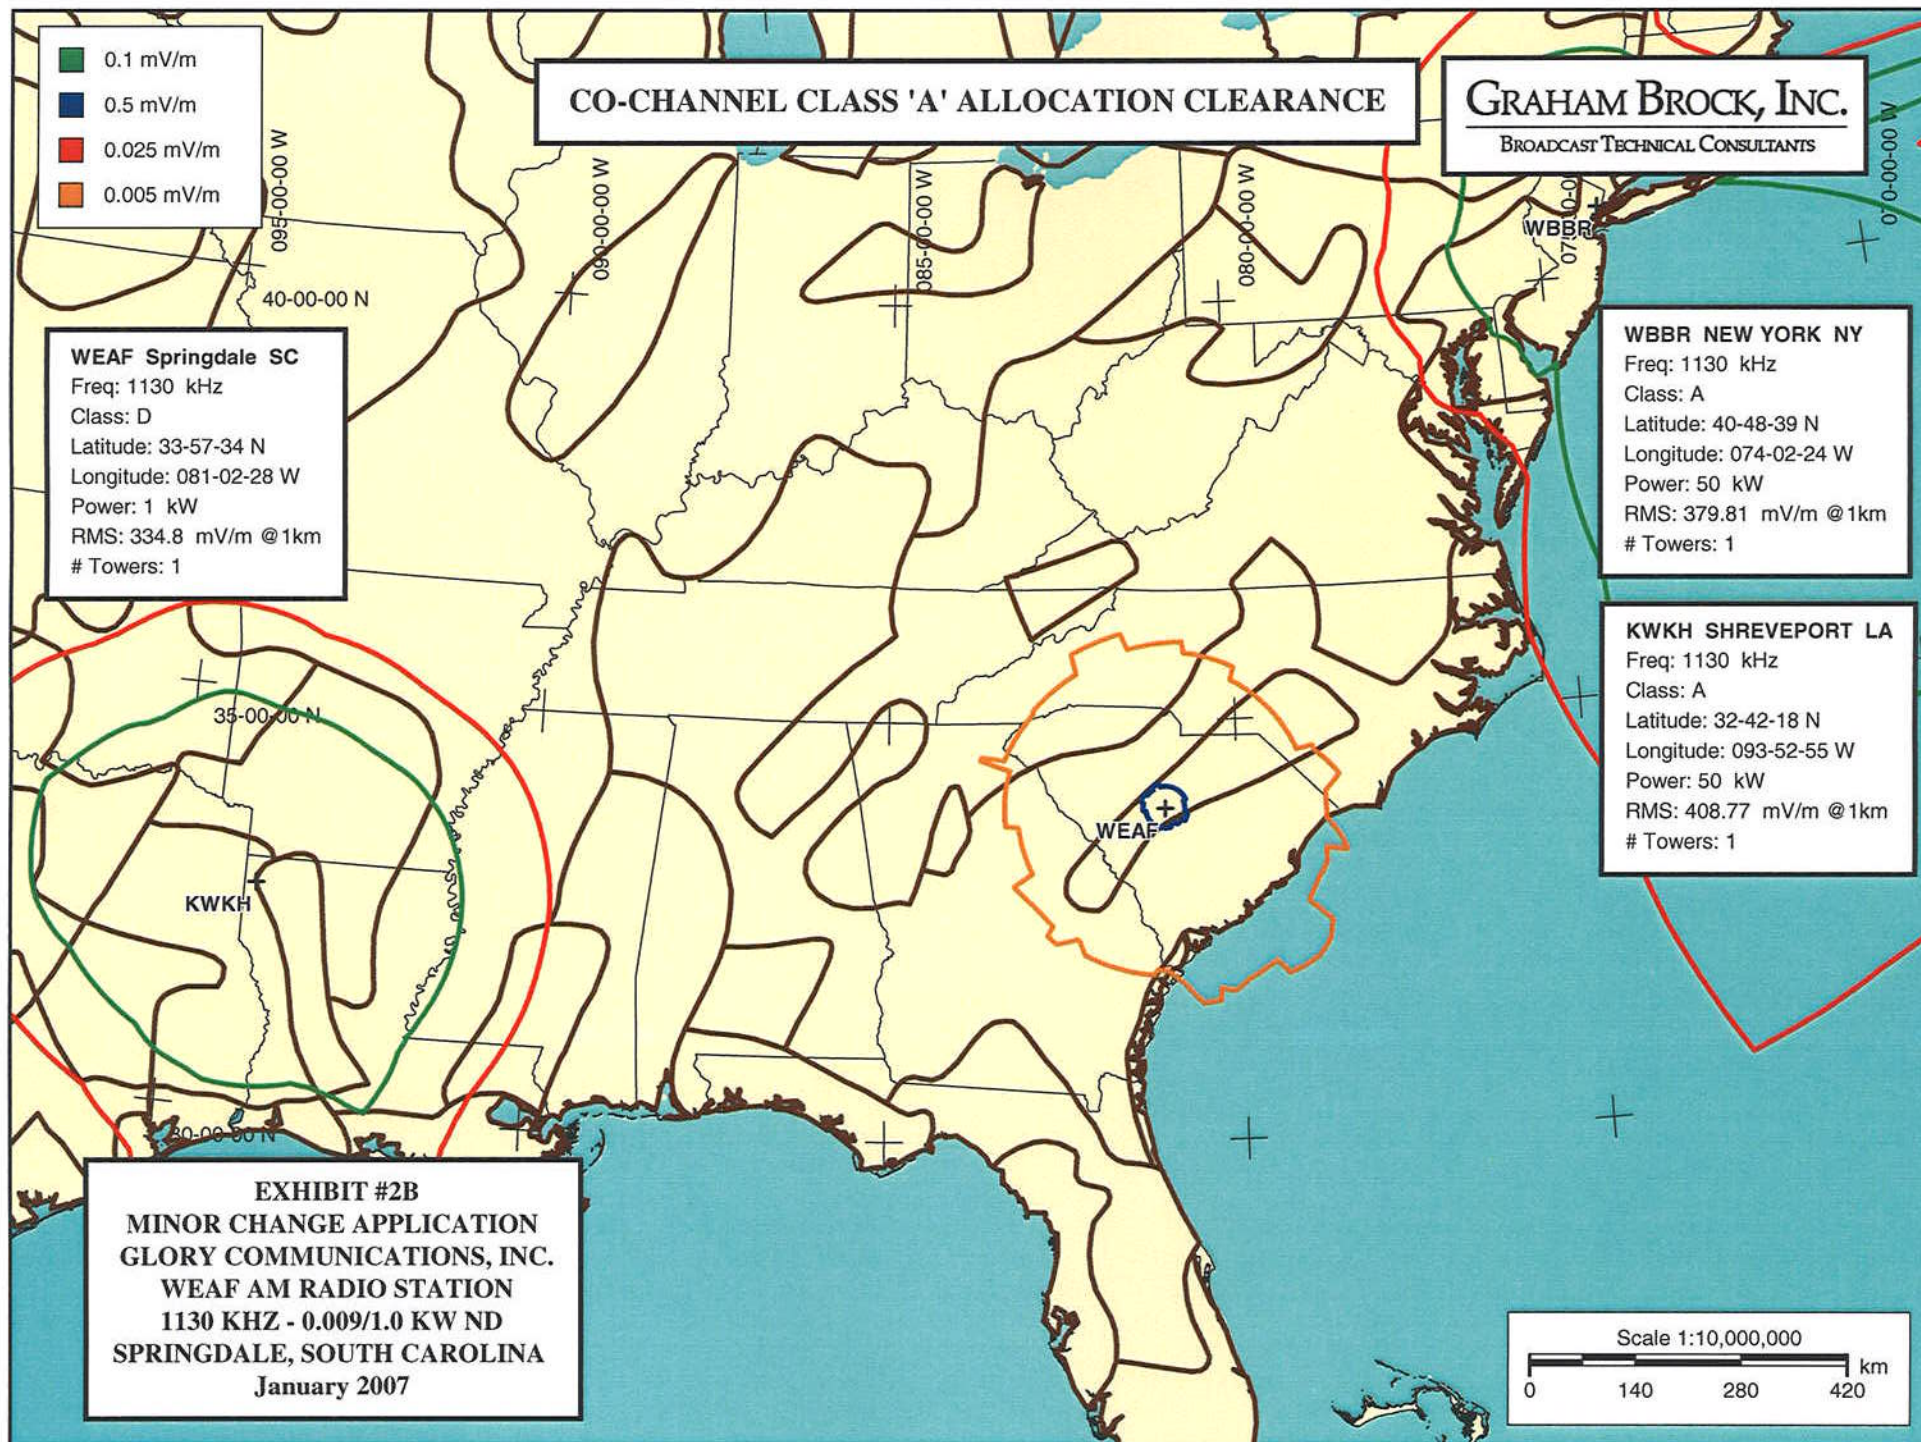

CO-CHANNEL ALLOCATION CLEARANCE

GRAHAM BROCK, INC.

BROADCAST TECHNICAL CONSULTANTS

■ 0.5 mV/m
■ 0.025 mV/m

WEAF Springdale SC

Freq: 1130 kHz
Class: D
Latitude: 33-57-34 N
Longitude: 081-02-28 W
Power: 1 kW
RMS: 334.8 mV/m @1km
Towers: 1

WLBA +

WEAF +

WLBA GAINESVILLE GA

Freq: 1130 kHz
Class: D
Latitude: 34-16-45 N
Longitude: 083-46-33 W
Power: 10 kW
RMS: 416.82 mV/m @1km
Towers: 1

WFXH HILTON HEAD ISLAND SC

Freq: 1130 kHz
Class: B
Latitude: 32-12-01 N
Longitude: 080-43-27 W
Power: 1 kW
RMS: 299.34 mV/m @1km
Towers: 1

WFXH +

EXHIBIT #2C
MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
1130 KHZ - 0.009/1.0 KW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

Scale 1:2,500,000

0 30 60 90 km

GRAHAM BROCK, INC.

BROADCAST TECHNICAL CONSULTANTS

1st ADJACENT-CHANNEL ALLOCATION CLEARANCE

WEAF Springdale SC

Freq: 1130 kHz
Class: D
Latitude: 33-57-34 N
Longitude: 081-02-28 W
Power: 1 kW
RMS: 334.8 mV/m @1km
Towers: 1

WXJO GORDON GA

Freq: 1120 kHz
Class: D
Latitude: 32-50-59 N
Longitude: 083-28-38 W
Power: 10 kW
RMS: 292.9 mV/m @1km
Towers: 1

WRNA CHINA GROVE NC

Freq: 1140 kHz
Class: D
Latitude: 35-34-20 N
Longitude: 080-35-21 W
Power: 1 kW
RMS: 322.24 mV/m @1km
Towers: 2

0.5 mV/m
0.25 mV/m

WRNA

WEAF

080-30-00 W

35-00-00 N

Scale 1:2,500,000

0 30 60 90 km

EXHIBIT #2D

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.

WEAF AM RADIO STATION
1130 KHZ - 0.009/1.0 KW ND
SPRINGDALE, SOUTH CAROLINA

January 2007

5.0 mV/m

2nd ADJACENT-CHANNEL ALLOCATION CLEARANCE

GRAHAM BROCK, INC.

BROADCAST TECHNICAL CONSULTANTS

WEAF Springdale SC

Freq: 1130 kHz
Class: D
Latitude: 33-57-34 N
Longitude: 081-02-28 W
Power: 1 kW
RMS: 334.8 mV/m @1km
Towers: 1

WBT CHARLOTTE NC

Freq: 1110 kHz
Class: A
Latitude: 35-07-56 N
Longitude: 080-53-23 W
Power: 50 kW
RMS: 374.98 mV/m @1km
Towers: 1

WAVO ROCK HILL SC

Freq: 1150 kHz
Class: D
Latitude: 34-56-55 N
Longitude: 080-59-58 W
Power: 5 kW
RMS: 307.38 mV/m @1km
Towers: 1

WEAF

WBT
WAVO

080-00-00 W

35-00-00 N

EXHIBIT #2E
MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
1130 KHZ - 0.009/1.0 KW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

Scale 1:2,500,000

0 30 60 90 km

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2F1

Proposed Domestic Daytime Allocation Contours

NORTH LATITUDE: 33° 57' 34"
WEST LONGITUDE: 81° 02' 28"

Azimuth	Radiation (mV/m at one km)	Distances to Contours in Kilometers :					
		Contour levels in mV/m.					
		25.000	5.000	.500	.250	.025	.005
* 0.0	334.80	5.84	13.00	29.42	40.63	119.25	218.73
* 5.0	334.80	5.84	13.00	29.42	40.63	119.25	220.59
* 7.0	334.80	5.84	13.00	29.42	40.63	119.25	221.50
* 8.0	334.80	5.84	14.10	29.42	40.63	124.60	206.87
* 10.0	334.80	5.84	14.10	29.42	40.63	124.60	206.87
* 15.0	334.80	5.84	14.10	29.42	40.63	124.60	206.87
* 20.0	334.80	5.84	14.10	29.42	40.63	124.60	206.87
* 25.0	334.80	5.84	14.10	29.42	40.63	124.60	206.87
* 27.0	334.80	5.84	14.10	29.42	40.63	124.60	206.87
* 28.0	334.80	3.59	11.39	29.42	40.63	113.44	189.75
* 30.0	334.80	3.59	11.39	29.42	40.63	113.44	189.75
* 35.0	334.80	3.59	11.39	29.42	40.63	113.44	189.75
* 40.0	334.80	3.59	11.39	29.42	40.63	113.44	189.75
* 45.0	334.80	3.59	11.39	29.42	40.63	113.44	189.75
* 47.0	334.80	3.59	11.39	29.42	40.63	113.44	189.75
* 48.0	334.80	7.31	12.80	29.42	40.63	113.44	189.75
* 50.0	334.80	7.31	12.80	29.42	40.63	113.44	189.75
* 55.0	334.80	7.31	12.80	29.42	40.63	113.44	189.75
* 60.0	334.80	7.31	12.80	29.42	40.63	113.44	189.75
* 65.0	334.80	7.31	12.80	29.42	40.63	113.44	189.75
* 67.0	334.80	7.31	12.80	29.42	40.63	113.44	189.75
* 68.0	334.80	5.04	11.39	25.74	35.77	112.28	210.63
* 70.0	334.80	5.04	11.39	25.74	35.77	112.28	210.63
* 75.0	334.80	5.04	11.39	25.74	35.77	112.28	222.53
* 80.0	334.80	5.04	11.39	25.74	35.77	121.61	233.62
* 84.0	334.80	5.04	11.39	25.74	35.77	115.07	216.65
* 85.0	334.80	4.22	9.93	25.74	35.77	113.44	212.41
* 90.0	334.80	4.22	9.93	25.74	35.77	113.44	212.41
* 95.0	334.80	4.22	9.93	25.74	35.77	113.44	213.78
*100.0	334.80	4.22	9.93	25.74	35.77	113.44	233.76
*104.0	334.80	4.22	9.93	25.74	35.77	113.44	246.27
*105.0	334.80	5.84	11.70	30.10	35.77	101.93	218.83
*110.0	334.80	5.84	11.70	30.10	35.77	101.93	225.29
*115.0	334.80	5.84	11.70	30.10	35.77	101.93	222.71

* - MEASURED RADIAL

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2F1 (Continued)

Proposed Domestic Daytime Allocation Contours

NORTH LATITUDE: 33° 57' 34"
WEST LONGITUDE: 81° 02' 28"

Azimuth	Radiation (mV/m at one km)	Distances to Contours in Kilometers :					
		Contour levels in mV/m.					
		25.000	5.000	.500	.250	.025	.005
*120.0	334.80	5.84	11.70	30.10	35.77	101.93	223.29
*124.0	334.80	5.84	11.70	30.10	35.77	101.93	225.80
*125.0	334.80	4.82	11.39	25.74	35.77	102.99	265.90
*130.0	334.80	4.82	11.39	25.74	35.77	102.99	278.71
*135.0	334.80	4.82	11.39	25.74	35.77	102.99	282.22
*140.0	334.80	4.82	11.39	25.74	35.77	102.99	277.70
*144.0	334.80	4.82	11.39	25.74	35.77	102.99	272.79
*145.0	334.80	3.59	8.47	22.56	31.56	93.98	249.47
*150.0	334.80	3.59	8.47	22.56	31.56	93.98	250.43
*155.0	334.80	3.59	8.47	22.56	31.56	93.98	251.79
*160.0	334.80	3.59	8.47	22.56	31.56	93.98	258.73
*164.0	334.80	3.59	8.47	22.56	31.56	93.98	249.65
*165.0	334.80	4.82	11.39	25.74	35.77	101.93	264.67
*170.0	334.80	4.82	11.39	25.74	35.77	101.93	262.47
*175.0	334.80	4.82	11.39	25.74	35.77	101.93	232.69
*180.0	334.80	4.82	11.39	25.74	35.77	101.93	214.89
*184.0	334.80	4.82	11.39	25.74	35.77	101.93	213.41
*185.0	334.80	4.22	8.47	25.74	35.77	108.11	220.12
*190.0	334.80	4.22	8.47	25.74	35.77	108.11	220.12
*195.0	334.80	4.22	8.47	25.74	35.77	108.11	220.12
*199.0	334.80	4.22	8.47	25.74	35.77	108.11	220.12
*200.0	334.80	4.82	11.39	25.74	35.77	108.28	220.29
*205.0	334.80	4.82	11.39	25.74	35.77	108.28	220.29
*210.0	334.80	4.82	11.39	25.74	35.77	108.28	220.29
*214.0	334.80	4.82	11.39	25.74	35.77	104.57	207.98
*215.0	334.80	4.82	11.39	25.74	35.77	104.57	207.46
*220.0	334.80	4.82	11.39	33.11	45.48	124.60	229.05
*224.0	334.80	4.82	11.39	33.11	45.48	124.60	228.55
*225.0	334.80	4.22	9.93	25.74	35.77	111.76	214.01
*230.0	334.80	4.22	9.93	25.74	35.77	111.76	214.17
*235.0	334.80	4.22	9.93	25.74	35.77	111.76	215.78

* - MEASURED RADIAL

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2F1 (Continued)

Proposed Domestic Daytime Allocation Contours

NORTH LATITUDE: 33° 57' 34"
WEST LONGITUDE: 81° 02' 28"

Azimuth	Radiation (mV/m at one km)	Distances to Contours in Kilometers :					
		Contour levels in mV/m.					
		25.000	5.000	.500	.250	.025	.005
*240.0	334.80	4.22	9.93	25.74	35.77	111.76	220.24
*244.0	334.80	4.22	9.93	25.74	35.77	112.31	224.32
*245.0	334.80	4.22	9.93	25.74	35.77	101.93	194.84
*250.0	334.80	4.22	9.93	25.74	35.77	101.93	194.84
*255.0	334.80	4.22	9.93	25.74	35.77	101.93	194.84
*260.0	334.80	4.22	9.93	25.74	35.77	101.93	194.84
*264.0	334.80	4.22	9.93	25.74	35.77	101.93	194.84
*265.0	334.80	4.82	11.39	29.42	40.63	113.44	211.60
*270.0	334.80	4.82	11.39	29.42	40.63	113.44	211.60
*275.0	334.80	4.82	11.39	29.42	40.63	113.44	211.60
*280.0	334.80	4.82	11.39	29.42	40.63	113.44	211.60
*285.0	334.80	4.82	11.39	29.42	40.63	113.44	210.28
286.0	334.80	4.82	11.39	33.11	47.59	146.44	251.52
287.0	334.80	4.82	11.39	33.11	47.71	146.57	251.13
*288.0	334.80	4.22	11.39	33.11	45.48	113.44	221.27
*290.0	334.80	4.22	11.39	33.11	45.48	113.44	220.52
*295.0	334.80	4.22	11.39	33.11	45.48	113.44	218.55
*300.0	334.80	4.22	11.39	33.11	45.48	113.44	216.65
*305.0	334.80	4.22	11.39	33.11	45.48	113.44	214.62
*307.0	334.80	4.22	11.39	33.11	45.48	113.44	213.96
*308.0	334.80	4.82	11.39	29.42	40.63	116.73	216.66
*310.0	334.80	4.82	11.39	29.42	40.63	116.73	216.06
*315.0	334.80	4.82	11.39	29.42	40.63	116.31	214.66
*320.0	334.80	4.82	11.39	29.42	40.63	115.25	213.61
*325.0	334.80	4.82	11.39	29.42	40.63	114.49	212.84
*327.0	334.80	4.82	11.39	29.42	40.63	114.29	212.64
*328.0	334.80	4.82	11.39	29.42	40.63	114.29	212.64
*330.0	334.80	4.82	11.39	33.11	49.26	139.55	237.90
*335.0	334.80	4.82	11.39	33.11	49.05	139.36	237.71
*340.0	334.80	4.82	11.39	33.11	48.74	139.30	237.65
*345.0	334.80	4.82	11.39	33.11	48.32	139.77	238.12
*347.0	334.80	4.82	11.39	33.11	48.13	139.99	238.34
*348.0	334.80	5.84	13.00	29.42	40.63	117.47	215.82
*350.0	334.80	5.84	13.00	29.42	40.63	117.86	216.21
*355.0	334.80	5.84	13.00	29.42	40.63	118.98	217.33

* - MEASURED RADIAL

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2F2

Proposed Ground Conductivity

Latitude: 33-57-34 N
Longitude: 081-02-28 W

Conductivity Database Used: M3 (USA) & MEASURED

Ground Conductivity Data: Region conductivity in mS/m followed by distance in km to the end of region. E - map data; M - measurement data.											
Azimuth											
* 0.0	3.0M	13.0	2.0M	21.4	1.5M	93.9	4.0E	126.2	2.0E	631.7	
* 5.0	3.0M	13.0	2.0M	21.4	1.5M	93.9	4.0E	138.6	2.0E	572.9	
* 7.0	3.0M	13.0	2.0M	21.4	1.5M	93.9	4.0E	145.0	2.0E	567.4	
* 8.0	1.0M	1.3	1.5M	2.0	2.0M	4.1	3.0M	18.1	1.5M	86.4	2.0M 195.7
	1.5M	269.1	2.0E	567.7	4.0E	637.0	2.0E	643.8			
* 10.0	1.0M	1.3	1.5M	2.0	2.0M	4.1	3.0M	18.1	1.5M	86.4	2.0M 195.7
	1.5M	269.1	2.0E	569.5	4.0E	768.3	2.0E	881.8			
* 15.0	1.0M	1.3	1.5M	2.0	2.0M	4.1	3.0M	18.1	1.5M	86.4	2.0M 195.7
	1.5M	269.1	2.0E	586.6	4.0E	725.0	2.0E	875.0			
* 20.0	1.0M	1.3	1.5M	2.0	2.0M	4.1	3.0M	18.1	1.5M	86.4	2.0M 195.7
	1.5M	269.1	2.0E	298.9	4.0E	341.9	2.0E	638.1			
* 25.0	1.0M	1.3	1.5M	2.0	2.0M	4.1	3.0M	18.1	1.5M	86.4	2.0M 195.7
	1.5M	269.1	4.0E	379.4	2.0E	902.1	4.0E	1300.0			
* 27.0	1.0M	1.3	1.5M	2.0	2.0M	4.1	3.0M	18.1	1.5M	86.4	2.0M 195.7
	1.5M	269.1	4.0E	375.9	2.0E	721.1	4.0E	806.2			
* 28.0	1.0M	1.3	0.5M	2.1	1.0M	5.1	2.0M	21.8	1.5M	66.7	1.0M 99.4
	1.5M	167.8	1.0M	266.4	4.0E	373.6	2.0E	722.4			
* 30.0	1.0M	1.3	0.5M	2.1	1.0M	5.1	2.0M	21.8	1.5M	66.7	1.0M 99.4
	1.5M	167.8	1.0M	266.4	4.0E	369.3	2.0E	735.6			
* 35.0	1.0M	1.3	0.5M	2.1	1.0M	5.1	2.0M	21.8	1.5M	66.7	1.0M 99.4
	1.5M	167.8	1.0M	266.4	4.0E	353.4	2.0E	584.1			
* 40.0	1.0M	1.3	0.5M	2.1	1.0M	5.1	2.0M	21.8	1.5M	66.7	1.0M 99.4
	1.5M	167.8	1.0M	266.4	4.0E	323.6	2.0E	578.5			
* 45.0	1.0M	1.3	0.5M	2.1	1.0M	5.1	2.0M	21.8	1.5M	66.7	1.0M 99.4
	1.5M	167.8	1.0M	266.4	4.0E	290.7	2.0E	520.0			
* 47.0	1.0M	1.3	0.5M	2.1	1.0M	5.1	2.0M	21.8	1.5M	66.7	1.0M 99.4
	1.5M	167.8	1.0M	266.4	4.0E	294.2	2.0E	528.2			
* 48.0	5.0M	12.8	1.5M	49.6	1.0M	85.1	1.5M	175.2	1.0M	227.6	2.0E 255.1
	4.0E	296.1	2.0E	524.2	5000.0E	532.4	4.0E	537.1			
* 50.0	5.0M	12.8	1.5M	49.6	1.0M	85.1	1.5M	175.2	1.0M	227.6	2.0E 258.5
	4.0E	300.3	2.0E	501.3	4.0E	528.4	5000.0E	535.2			
* 55.0	5.0M	12.8	1.5M	49.6	1.0M	85.1	1.5M	175.2	1.0M	227.6	2.0E 266.0
	4.0E	312.9	2.0E	466.5	4.0E	555.5	5000.0E	1300.0			
* 60.0	5.0M	12.8	1.5M	49.6	1.0M	85.1	1.5M	175.2	1.0M	227.6	2.0E 270.4
	4.0E	329.7	2.0E	428.7	4.0E	446.2	5000.0E	448.9			

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2F2 (continued)

Proposed Ground Conductivity

Latitude: 33-57-34 N
Longitude: 081-02-28 W

Conductivity Database Used: M3 (USA) & MEASURED

Ground Conductivity Data: Region conductivity in mS/m followed by distance in km to the end of region. E - map data; M - measurement data.												
Azimuth												
* 65.0	5.0M	12.8	1.5M	49.6	1.0M	85.1	1.5M	175.2	1.0M	227.6	2.0E	277.0
	4.0E	406.3	5000.0E	412.6	4.0E	497.1	5000.0E	503.1				
* 67.0	5.0M	12.8	1.5M	49.6	1.0M	85.1	1.5M	175.2	1.0M	227.6	2.0E	277.1
	4.0E	422.9	5000.0E	432.7	4.0E	437.4	5000.0E	442.7				
* 68.0	5000.0M	1.3	2.0M	2.1	5.0M	5.0	2.0M	18.2	1.0M	47.4	2.0E	274.0
	4.0E	430.2	5000.0E	454.3	4.0E	496.2	5000.0E	509.1				
* 70.0	5000.0M	1.3	2.0M	2.1	5.0M	5.0	2.0M	18.2	1.0M	47.4	2.0E	221.2
	4.0E	387.9	5000.0E	390.6	4.0E	434.0	5000.0E	437.1				
* 75.0	5000.0M	1.3	2.0M	2.1	5.0M	5.0	2.0M	18.2	1.0M	47.4	2.0E	121.7
	4.0E	341.3	5000.0E	344.2	4.0E	444.5	5000.0E	1300.0				
* 80.0	5000.0M	1.3	2.0M	2.1	5.0M	5.0	2.0M	18.2	1.0M	47.4	2.0E	70.2
	4.0E	324.5	5000.0E	1300.0								
* 85.0	1.5M	23.9	1.0M	54.7	1.5M	171.5	4.0E	296.6	5000.0E	1300.0		
* 87.0	1.5M	23.9	1.0M	54.7	1.5M	171.5	4.0E	284.9	5000.0E	286.0	4.0E	291.8
	5000.0E	1300.0										
* 88.0	1.5M	23.9	1.0M	54.7	1.5M	171.5	4.0E	283.2	5000.0E	286.2	4.0E	289.5
	5000.0E	1300.0										
* 90.0	1.5M	23.9	1.0M	54.7	1.5M	171.5	4.0E	280.0	5000.0E	1300.0		
* 95.0	1.5M	23.9	1.0M	54.7	1.5M	171.5	4.0E	211.4	5000.0E	1300.0		
*100.0	1.5M	23.9	1.0M	54.7	1.5M	171.5	4.0E	198.8	5000.0E	1300.0		
*104.0	1.5M	23.9	1.0M	54.7	1.5M	171.5	4.0E	190.8	5000.0E	1300.0		
*105.0	7.0M	1.3	4.0M	2.7	3.0M	11.7	2.0M	30.1	1.0M	140.6	4.0E	189.9
	5000.0E	1300.0										
*110.0	7.0M	1.3	4.0M	2.7	3.0M	11.7	2.0M	30.1	1.0M	140.6	4.0E	178.3
	5000.0E	178.6	4.0E	186.3	5000.0E	1300.0						
*115.0	7.0M	1.3	4.0M	2.7	3.0M	11.7	2.0M	30.1	1.0M	140.6	4.0E	187.1
	5000.0E	190.5	4.0E	190.9	5000.0E	1300.0						
*120.0	7.0M	1.3	4.0M	2.7	3.0M	11.7	2.0M	30.1	1.0M	140.6	4.0E	187.2
	5000.0E	1300.0										
*124.0	7.0M	1.3	4.0M	2.7	3.0M	11.7	2.0M	30.1	1.0M	140.6	4.0E	185.6
	5000.0E	1300.0										
*125.0	2.0M	13.3	1.5M	21.1	1.0M	99.2	4.0E	178.4	5000.0E	179.3	4.0E	183.4
	5000.0E	1300.0										
*130.0	2.0M	13.3	1.5M	21.1	1.0M	99.2	4.0E	174.9	5000.0E	1300.0		
*135.0	2.0M	13.3	1.5M	21.1	1.0M	99.2	4.0E	172.9	5000.0E	1300.0		

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2F2 (continued)

Proposed Ground Conductivity

Latitude: 33-57-34 N
Longitude: 081-02-28 W

Conductivity Database Used: M3 (USA) & MEASURED

Ground Conductivity Data:											
Region conductivity in mS/m followed by distance in km											
to the end of region. E - map data; M - measurement data.											
Azimuth											
*140.0	2.0M	13.3	1.5M	21.1	1.0M	99.2	4.0E	175.5	5000.0E	1300.0	
*144.0	2.0M	13.3	1.5M	21.1	1.0M	99.2	4.0E	178.4	5000.0E	1300.0	
*145.0	1.5M	1.3	2.0M	2.1	1.0M	13.1	0.5M	87.5	4.0E	178.2	5000.0E 1300.0
*150.0	1.5M	1.3	2.0M	2.1	1.0M	13.1	0.5M	87.5	4.0E	177.6	5000.0E 1300.0
*155.0	1.5M	1.3	2.0M	2.1	1.0M	13.1	0.5M	87.5	4.0E	176.7	5000.0E 1300.0
*160.0	1.5M	1.3	2.0M	2.1	1.0M	13.1	0.5M	87.5	4.0E	172.3	5000.0E 1300.0
*164.0	1.5M	1.3	2.0M	2.1	1.0M	13.1	0.5M	87.5	4.0E	166.5	5000.0E 168.8
	4.0E	173.2	8.0E	182.0	5000.0E	1300.0					
*165.0	2.0M	12.5	1.5M	23.8	1.0M	103.3	4.0E	171.4	8.0E	182.5	5000.0E 1300.0
*170.0	2.0M	12.5	1.5M	23.8	1.0M	103.3	4.0E	163.5	8.0E	185.9	5000.0E 1300.0
*175.0	2.0M	12.5	1.5M	23.8	1.0M	103.3	4.0E	173.8	8.0E	205.8	5000.0E 691.1
*180.0	2.0M	12.5	1.5M	23.8	1.0M	103.3	4.0E	198.7	8.0E	216.1	5000.0E 514.5
*184.0	2.0M	12.5	1.5M	23.8	1.0M	103.3	4.0E	218.4	8.0E	253.6	5000.0E 256.2
	8.0E	267.5	5000.0E	427.9	8.0E	460.9	4.0E	473.1			
*185.0	1.0M	1.5	5000.0M	2.1	1.5M	6.8	1.0M	86.8	4.0E	225.3	8.0E 253.2
	5000.0E	257.1	8.0E	270.4	5000.0E	405.1	8.0E	442.6			
*190.0	1.0M	1.5	5000.0M	2.1	1.5M	6.8	1.0M	86.8	4.0E	320.3	
*195.0	1.0M	1.5	5000.0M	2.1	1.5M	6.8	1.0M	86.8	4.0E	422.6	
*199.0	1.0M	1.5	5000.0M	2.1	1.5M	6.8	1.0M	86.8	4.0E	398.6	
*200.0	2.0M	12.5	1.0M	86.4	4.0E	392.5	2.0E	466.0	4.0E	564.4	
*205.0	2.0M	12.5	1.0M	86.4	4.0E	372.6	2.0E	492.2	4.0E	533.8	
*210.0	2.0M	12.5	1.0M	86.4	4.0E	357.1	2.0E	514.2	5000.0E	1300.0	
*214.0	2.0M	12.5	1.0M	86.4	2.0E	158.1	4.0E	346.9	2.0E	514.0	
*215.0	2.0M	12.5	1.0M	86.4	2.0E	162.0	4.0E	346.1	2.0E	522.1	
*220.0	2.0E	170.5	4.0E	362.6	2.0E	512.2	1.0E	606.7	5000.0E	1300.0	
*224.0	2.0E	174.0	4.0E	483.0	2.0E	534.0	1.0E	609.6	5000.0E	1300.0	
*225.0	1.5M	13.1	0.5M	21.2	1.0M	49.8	2.0E	174.0	4.0E	492.6	
*230.0	1.5M	13.1	0.5M	21.2	1.0M	49.8	2.0E	172.7	4.0E	551.0	
*235.0	1.5M	13.1	0.5M	21.2	1.0M	49.8	2.0E	160.6	4.0E	571.5	
*240.0	1.5M	13.1	0.5M	21.2	1.0M	49.8	2.0E	131.6	4.0E	576.7	
*244.0	1.5M	13.1	0.5M	21.2	1.0M	49.8	2.0E	108.8	4.0E	517.8	
*245.0	0.5M	1.5	1.5M	15.0	1.0M	39.9	1.5M	84.2	1.0M	165.9	4.0E 506.7
*250.0	0.5M	1.5	1.5M	15.0	1.0M	39.9	1.5M	84.2	1.0M	165.9	4.0E 476.6
*255.0	0.5M	1.5	1.5M	15.0	1.0M	39.9	1.5M	84.2	1.0M	165.9	4.0E 296.8
	1.0E	304.3	4.0E	338.5	2.0E	448.2	4.0E	603.3			
*260.0	0.5M	1.5	1.5M	15.0	1.0M	39.9	1.5M	84.2	1.0M	165.9	4.0E 273.0
	1.0E	321.0	2.0E	478.7	4.0E	583.1	2.0E	776.7			
*264.0	0.5M	1.5	1.5M	15.0	1.0M	39.9	1.5M	84.2	1.0M	165.9	4.0E 260.2
	1.0E	311.5	2.0E	472.8	4.0E	582.3	2.0E	803.1			
*265.0	2.0M	12.9	1.5M	51.9	2.0M	85.0	1.5M	176.0	4.0E	258.8	1.0E 309.7
*270.0	2.0M	12.9	1.5M	51.9	2.0M	85.0	1.5M	176.0	4.0E	256.0	2.0E 261.0
	1.0E	299.0	2.0E	428.0	4.0E	493.4	2.0E	548.2			

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2F2 (continued)

Proposed Ground Conductivity

Latitude: 33-57-34 N
Longitude: 081-02-28 W

Conductivity Database Used: M3 (USA) & MEASURED

Ground Conductivity Data: Region conductivity in mS/m followed by distance in km to the end of region. E - map data; M - measurement data.											
Azimuth											
*275.0	2.0M	12.9	1.5M	51.9	2.0M	85.0	1.5M	176.0	4.0E	234.7	2.0E 267.8
	1.0E	288.9	2.0E	389.8	4.0E	448.4	2.0E	561.0			
*280.0	2.0M	12.9	1.5M	51.9	2.0M	85.0	1.5M	176.0	4.0E	213.6	2.0E 345.6
*285.0	2.0M	12.9	1.5M	51.9	2.0M	85.0	1.5M	176.0	4.0E	196.8	2.0E 331.2
286.0	2.0E	38.7	4.0E	192.9	2.0E	330.0	4.0E	406.7	2.0E	494.9	
287.0	2.0E	38.3	4.0E	189.2	2.0E	328.9	4.0E	404.6	2.0E	490.2	
*288.0	0.5M	1.4	1.5M	5.2	2.0M	75.8	1.5M	114.7	4.0E	185.7	2.0E 329.3
*290.0	0.5M	1.4	1.5M	5.2	2.0M	75.8	1.5M	114.7	4.0E	179.2	2.0E 331.7
*295.0	0.5M	1.4	1.5M	5.2	2.0M	75.8	1.5M	114.7	4.0E	163.0	2.0E 455.0
*300.0	0.5M	1.4	1.5M	5.2	2.0M	75.8	1.5M	114.7	4.0E	148.4	2.0E 434.4
*305.0	0.5M	1.4	1.5M	5.2	2.0M	75.8	1.5M	114.7	4.0E	133.8	2.0E 428.2
*307.0	0.5M	1.4	1.5M	5.2	2.0M	75.8	1.5M	114.7	4.0E	129.0	2.0E 442.6
*308.0	0.5M	1.5	1.5M	2.7	2.0M	23.3	1.5M	102.0	4.0E	126.8	2.0E 449.3
*310.0	0.5M	1.5	1.5M	2.7	2.0M	23.3	1.5M	102.0	4.0E	122.7	2.0E 458.4
*315.0	0.5M	1.5	1.5M	2.7	2.0M	23.3	1.5M	102.0	4.0E	114.1	2.0E 478.8
*320.0	0.5M	1.5	1.5M	2.7	2.0M	23.3	1.5M	102.0	4.0E	107.8	2.0E 485.9
*325.0	0.5M	1.5	1.5M	2.7	2.0M	23.3	1.5M	102.0	4.0E	103.2	2.0E 284.3
	4.0E	324.8	2.0E	465.1	8.0E	524.3	4.0E	569.1			
*327.0	0.5M	1.5	1.5M	2.7	2.0M	23.3	1.5M	102.0	2.0E	284.7	4.0E 370.9
*328.0	0.5M	1.5	1.5M	2.7	2.0M	23.3	1.5M	102.0	2.0E	284.6	4.0E 369.2
*330.0	2.0E	33.5	4.0E	100.5	2.0E	284.7	4.0E	365.8	2.0E	477.5	
*335.0	2.0E	34.2	4.0E	100.4	2.0E	286.4	4.0E	359.6	2.0E	540.8	
*340.0	2.0E	35.1	4.0E	101.4	2.0E	290.5	4.0E	356.8	2.0E	611.6	
*345.0	2.0E	36.4	4.0E	105.5	2.0E	297.0	4.0E	357.7	2.0E	625.3	
*347.0	2.0E	37.0	4.0E	107.4	2.0E	300.3	4.0E	359.0	2.0E	627.0	
*348.0	3.0M	13.0	2.0M	21.4	1.5M	93.9	4.0E	108.5	2.0E	302.1	
*350.0	3.0M	13.0	2.0M	21.4	1.5M	93.9	4.0E	110.7	2.0E	306.1	
*355.0	3.0M	13.0	2.0M	21.4	1.5M	93.9	4.0E	117.5	2.0E	624.9	

* - MEASURED RADIAL

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2F3

Measurement Data Source

Measurement Data

Extracted from WGCV Application for Power Increase - BP-20031218AAY, December 2003.

Radial	mmho/dist (km)							
18'	1.0/1.30	1.5/1.95	2.0/4.10	3.0/18.1	1.5/86.4	2.0/195.7	1.5/269.1	
38'	1.0/1.30	0.5/2.10	1.0/5.06	2.0/21.8	1.5/66.7	1.0/99.4	1.5/167.8	1.0/266.4
58'	5.0/12.8	1.5/49.6	1.0/85.1	1.5/175.2	1.0/227.6			
78'	5000/1.30	2.0/2.13	5.0/5.04	2.0/18.2	1.0/47.4			
95'	1.5/23.9	1.0/54.7	1.5/171.5					
115'	7.0/1.30	4.0/2.70	3.0/11.7	2.0/30.1	1.0/140.6			
135'	2.0/13.3	1.5/21.1	1.0/99.2					
155'	1.5/1.32	2.0/2.09	1.0/13.1	0.5/87.5				
175'	2.0/12.5	1.5/23.8	1.0/103.3					
195'	1.0/1.48	5000/2.07	1.5/6.85	1.0/86.8				
205'	2.0/12.5	1.0/86.4						
235'	1.5/13.1	0.5/21.2	1.0/49.8					
255'	0.5/1.50	1.5/15.0	1.0/39.9	1.5/84.2	1.0/165.9			
275'	2.0/12.9	1.5/51.9	2.0/85.0	1.5/176.0				
298'	0.5/1.37	1.5/5.24	2.0/75.8	1.5/114.7				
318'	0.5/1.48	1.5/2.70	2.0/23.3	1.5/102.0				
338'	2.0/17.5	1.5/85.3	1.0/94.0					
358'	3.0/13.0	2.0/21.4	1.5/93.9					

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2G

WBBR, New York, NY - 1130 kHz - 50.0 kW ND - Class A

North Latitude: 40° 48' 39"
West Longitude: 74° 02' 24"

Azimuth	Radiation (mV/m at one km)	Dist to Contours - km:		Azimuth	Radiation (mV/m at one km)	Dist to Contours - km:	
		.100	.025			.100	.025
190.0	2685.66	387.42	657.45	220.0	2685.66	211.59	329.01
195.0	2685.66	298.59	568.63	225.0	2685.66	218.32	334.12
200.0	2685.66	214.81	371.69	230.0	2685.66	206.45	328.62
205.0	2685.66	239.19	337.06	235.0	2685.66	206.45	307.86
210.0	2685.66	226.01	328.37	240.0	2685.66	206.45	307.16
215.0	2685.66	212.68	316.06				

Conductivity Database Used: US M3

Ground Conductivity Data: Region conductivity in mS/m followed by distance in km to the end of region. E - map data; M - measurement data.												
Azimuth												
190.0	4.0E	13.6	5000.0E	16.5	4.0E	26.7	5000.0E	40.7	4.0E	144.1	5000.0E	1300.0
195.0	4.0E	29.7	5000.0E	41.5	4.0E	172.1	5000.0E	175.6	4.0E	178.9	5000.0E	582.4
	4.0E	597.9	5000.0E	1300.0						4.0E	587.6	5000.0E
200.0	4.0E	33.3	5000.0E	42.6	4.0E	221.5	5000.0E	258.0	2.0E	312.7	5000.0E	501.5
	4.0E	537.0	5000.0E	542.3	4.0E	551.6	5000.0E	568.6	4.0E	634.1	5000.0E	653.5
	4.0E	662.1	5000.0E	686.2	4.0E	709.4	5000.0E	715.2	4.0E	716.3	5000.0E	1300.0
205.0	4.0E	35.3	5000.0E	41.6	4.0E	197.5	5000.0E	239.1	4.0E	266.4	2.0E	347.2
	5000.0E	482.1	4.0E	570.9	5000.0E	575.3	4.0E	643.0	5000.0E	644.9	4.0E	784.1
210.0	4.0E	37.9	5000.0E	40.5	4.0E	199.5	5000.0E	226.4	4.0E	281.7	2.0E	326.1
	5000.0E	451.1	2.0E	459.4	5000.0E	468.4	2.0E	688.4	4.0E	909.3	5000.0E	957.5
	4.0E	968.0	5000.0E	1300.0								
215.0	4.0E	197.6	5000.0E	207.2	4.0E	298.7	2.0E	328.7	5000.0E	352.6	4.0E	362.0
	5000.0E	407.7	2.0E	690.0	4.0E	731.0	2.0E	855.1	4.0E	1098.3	8.0E	1106.1
	5000.0E	1174.5	8.0E	1207.4	5000.0E	1210.0	8.0E	1225.4	4.0E	1300.0		
220.0	4.0E	194.3	5000.0E	202.2	4.0E	276.2	40.0E	278.5	4.0E	288.4	40.0E	290.8
	4.0E	299.6	40.0E	322.8	5000.0E	332.4	4.0E	339.9	5000.0E	340.1	4.0E	343.4
	5000.0E	369.2	4.0E	369.5	5000.0E	378.6	4.0E	393.6	5000.0E	395.7	4.0E	399.9
	2.0E	975.3	4.0E	1300.0							2.0E	653.1
225.0	4.0E	146.6	5000.0E	152.3	4.0E	178.2	5000.0E	190.1	4.0E	260.4	40.0E	261.7
	4.0E	367.0	5000.0E	374.7	4.0E	394.9	2.0E	615.5	4.0E	1300.0	4.0E	268.0
230.0	4.0E	215.9	40.0E	241.7	4.0E	247.8	40.0E	251.3	4.0E	254.9	40.0E	267.9
	4.0E	291.7	40.0E	291.8	4.0E	335.6	5000.0E	338.6	4.0E	363.6	2.0E	614.9
	4.0E	1215.5	1.0E	1232.9	4.0E	1300.0					4.0E	638.8
235.0	4.0E	269.8	2.0E	1300.0								
240.0	4.0E	261.8	2.0E	764.5	4.0E	934.3	2.0E	1120.5	4.0E	1187.7	2.0E	1300.0

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2H

KWKH, Shreveport, LA - 1130 kHz - 50.0 kW ND - Class A

North Latitude: 32° 42' 18"
West Longitude: 93° 52' 52"

Azimuth	Radiation (mV/m at one km)	Dist to Contours - km:	
		Contour levels in mV/m. .100	.025
70.0	2890.44	262.07	377.91
75.0	2890.44	264.67	380.51
80.0	2890.44	267.23	383.07
85.0	2890.44	269.82	385.66
90.0	2890.44	271.81	387.65
95.0	2890.44	273.49	387.12
100.0	2890.44	274.85	387.65
105.0	2890.44	276.26	389.14
110.0	2890.44	277.78	390.85

Conductivity Database Used: US M3

Ground Conductivity Data:											
Region conductivity in mS/m followed by distance in km											
to the end of region. E - map data; M - measurement data.											
Azimuth											
70.0	8.0E	0.2	15.0E	84.1	4.0E	213.0	8.0E	466.6	2.0E	539.0	4.0E 691.9 2.0E 833.2 4.0E 902.2
	2.0E	1317.6									
75.0	8.0E	0.2	15.0E	83.9	4.0E	198.1	8.0E	434.0	2.0E	587.7	4.0E 642.3 2.0E 758.3 4.0E 854.1
	2.0E	1175.2	4.0E	1282.7	2.0E	1300.0					
80.0	8.0E	0.2	15.0E	84.4	4.0E	186.4	8.0E	412.3	2.0E	611.6	4.0E 745.8 2.0E 892.3 1.0E 940.3
	4.0E	1143.1	2.0E	1234.0	4.0E	1300.0					
85.0	8.0E	0.2	15.0E	85.5	4.0E	177.3	8.0E	399.8	2.0E	623.3	4.0E 731.1 2.0E 867.8 4.0E 1065.2
	2.0E	1130.9	4.0E	1300.0							
90.0	8.0E	0.2	15.0E	86.1	4.0E	170.3	8.0E	394.8	2.0E	622.9	4.0E 1195.9 8.0E 1211.2 5000.0E 1300.0
95.0	8.0E	0.2	15.0E	87.5	4.0E	166.6	8.0E	357.5	4.0E	470.4	2.0E 614.3 8.0E 750.8 4.0E 1170.1
	8.0E	1183.3	5000.0E	1300.0							
100.0	8.0E	0.2	15.0E	89.6	4.0E	166.3	8.0E	347.8	4.0E	468.4	2.0E 602.5 8.0E 734.0 4.0E 942.9
	2.0E	1125.8	4.0E	1203.0	8.0E	1218.2	5000.0E	1300.0			
105.0	8.0E	0.2	15.0E	92.5	4.0E	167.9	8.0E	350.3	4.0E	463.1	2.0E 595.3 1.0E 948.4 2.0E 961.9
	5000.0E	966.7	2.0E	967.9	5000.0E	1011.1	2.0E	1046.3	4.0E	1197.6	2.0E 1309.8
110.0	8.0E	0.2	15.0E	96.3	4.0E	171.4	8.0E	354.3	4.0E	461.5	2.0E 596.5 5000.0E 598.2 2.0E 605.0
	1.0E	681.9	5000.0E	692.8	1.0E	697.8	5000.0E	880.0	1.0E	885.9	5000.0E 1164.5 4.0E 1214.7 2.0E 1300.0

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2I

WFXH, Hilton Head Island, SC - 1130 kHz - 1.0 kW ND

North Latitude: 32° 12' 01"
West Longitude: 80° 43' 27"

Azimuth	Radiation (mV/m at one km)	Dist to Contours - km:		Azimuth	Radiation (mV/m at one km)	Dist to Contours - km:	
		.500	.025			.500	.025
300.0	299.34	52.47	157.79	0.0	299.34	58.52	169.28
305.0	299.34	52.63	157.35	5.0	299.34	57.99	168.76
310.0	299.34	52.88	157.78	10.0	299.34	57.64	168.40
315.0	299.34	53.23	158.52	15.0	299.34	57.42	168.18
320.0	299.34	53.72	159.58	20.0	299.34	59.41	170.17
325.0	299.34	54.37	160.92	25.0	299.34	60.13	170.89
330.0	299.34	55.21	162.64	30.0	299.34	61.78	172.54
335.0	299.34	56.33	164.84	35.0	299.34	63.76	174.52
340.0	299.34	64.03	172.63	40.0	299.34	66.89	177.65
345.0	299.34	65.07	174.86	45.0	299.34	72.26	183.02
350.0	299.34	59.08	169.84	50.0	299.34	75.94	200.14
355.0	299.34	58.86	169.62	55.0	299.34	142.79	674.74

Conductivity Database Used: US M3

Ground Conductivity Data:
Region conductivity in mS/m followed by distance in km
Azimuth to the end of region. E - map data; M - measurement data.

300.0	5000.0E	7.0	8.0E	23.1	4.0E	132.8	2.0E	187.7	4.0E	333.3	1.0E	381.5	2.0E	473.2	4.0E	522.9
305.0	5000.0E	7.4	8.0E	23.3	4.0E	129.9	2.0E	193.1	4.0E	345.7	2.0E	356.8	1.0E	386.7	2.0E	449.0
310.0	5000.0E	7.8	8.0E	23.7	4.0E	131.1	2.0E	193.5	4.0E	339.9	2.0E	450.4	4.0E	522.0	2.0E	590.4
315.0	5000.0E	8.3	8.0E	24.3	4.0E	133.4	2.0E	194.0	4.0E	333.5	2.0E	579.7	4.0E	801.7	8.0E	1055.2
320.0	5000.0E	9.1	8.0E	25.1	4.0E	137.0	2.0E	195.4	4.0E	327.7	2.0E	593.6	4.0E	818.6	8.0E	1073.7
325.0	5000.0E	10.0	8.0E	26.2	4.0E	141.3	2.0E	198.3	4.0E	320.3	2.0E	644.6	4.0E	850.3	8.0E	1129.5
330.0	5000.0E	11.2	8.0E	27.5	4.0E	146.9	2.0E	201.5	4.0E	312.0	2.0E	656.5	8.0E	681.7	4.0E	766.4
335.0	5000.0E	12.9	8.0E	29.1	4.0E	154.1	2.0E	206.4	4.0E	302.3	2.0E	468.1	4.0E	502.3	2.0E	655.3
345.0	5000.0E	32.2	4.0E	170.3	2.0E	222.1	4.0E	294.3	2.0E	486.4	4.0E	552.3	2.0E	822.5	8.0E	921.0
350.0	5000.0E	16.5	8.0E	33.2	4.0E	177.1	2.0E	232.7	4.0E	305.0	2.0E	501.3	4.0E	558.2	2.0E	831.3
355.0	5000.0E	15.2	8.0E	34.0	4.0E	184.0	2.0E	245.9	4.0E	323.5	2.0E	822.1	4.0E	871.9	8.0E	1083.6
0.0	5000.0E	14.1	8.0E	34.0	4.0E	190.7	2.0E	263.9	4.0E	352.8	2.0E	836.4	4.0E	934.1	8.0E	1075.0
5.0	5000.0E	13.3	8.0E	33.3	4.0E	199.5	2.0E	289.2	4.0E	408.9	2.0E	758.8	4.0E	976.2	2.0E	1072.3
10.0	5000.0E	12.7	8.0E	32.9	4.0E	209.3	2.0E	322.6	4.0E	527.1	2.0E	775.5	4.0E	911.5	2.0E	1059.9
15.0	5000.0E	12.2	8.0E	32.7	4.0E	221.3	2.0E	358.5	4.0E	549.1	2.0E	869.4	4.0E	979.7	2.0E	1058.9
20.0	5000.0E	11.9	8.0E	12.8	5000.0E	18.5	8.0E	32.8	4.0E	238.1	2.0E	395.9	4.0E	512.3	2.0E	888.6
25.0	5000.0E	16.3	8.0E	33.1	4.0E	37.6	5000.0E	38.9	4.0E	260.9	2.0E	398.9	4.0E	437.3	2.0E	737.6
30.0	5000.0E	14.7	8.0E	33.7	4.0E	36.5	5000.0E	40.1	4.0E	293.1	2.0E	392.4	4.0E	437.4	2.0E	690.2
35.0	5000.0E	13.4	8.0E	34.6	4.0E	35.7	5000.0E	41.7	4.0E	341.4	2.0E	383.6	4.0E	441.1	2.0E	618.4
40.0	5000.0E	12.4	8.0E	22.7	5000.0E	23.6	8.0E	34.2	5000.0E	43.8	4.0E	508.4	2.0E	535.3	4.0E	562.0
45.0	5000.0E	11.7	8.0E	21.5	5000.0E	28.9	8.0E	31.1	5000.0E	45.3	4.0E	470.1	5000.0E	470.8	4.0E	508.7
50.0	5000.0E	11.1	8.0E	16.3	5000.0E	46.8	4.0E	97.8	5000.0E	101.6	4.0E	182.5	5000.0E	185.2	4.0E	187.8
	5000.0E	297.0	4.0E	350.3	5000.0E	439.7	4.0E	490.2	5000.0E	496.7	4.0E	497.3	5000.0E	503.3	4.0E	508.4
55.0	5000.0E	10.7	8.0E	12.0	5000.0E	72.2	4.0E	82.0	5000.0E	84.3	4.0E	94.9	5000.0E	1300.0		

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2J1

WLBA, Gainesville, GA - 1130 kHz - 10.0 kW ND

North Latitude: 34° 16' 45"
West Longitude: 83° 46' 33"

Azimuth	Radiation (mV/m at one km)	Dist to Contours - km:		Azimuth	Radiation (mV/m at one km)	Dist to Contours - km:	
		.500	.025			.500	.025
70.0	1318.10	61.89	206.29	* 95.0	1318.10	43.64	194.48
75.0	1318.10	61.89	227.87	*100.0	1318.10	43.64	194.48
80.0	1318.10	63.81	235.08	*105.0	1318.10	43.64	194.34
84.0	1318.10	65.78	237.05	106.0	1318.10	71.25	236.70
* 85.0	1318.10	43.64	194.48	110.0	1318.10	71.75	236.20
* 90.0	1318.10	43.64	194.48	115.0	1318.10	72.25	236.13

Conductivity Database Used: US M3

Ground Conductivity Data: Region conductivity in mS/m followed by distance in km to the end of region. E - map data; M - measurement data.																
Azimuth																
70.0	2.0E	257.9	4.0E	499.2	2.0E	666.3	4.0E	668.2	5000.0E	671.5	4.0E	724.6	5000.0E	726.5	4.0E	748.6
75.0	2.0E	73.6	4.0E	190.7	2.0E	205.9	4.0E	340.8	2.0E	483.3	4.0E	548.5	2.0E	607.4	4.0E	721.7
80.0	2.0E	55.3	4.0E	298.0	2.0E	509.4	4.0E	623.6	5000.0E	627.5	4.0E	664.0	5000.0E	1300.0		
84.0	2.0E	48.7	4.0E	272.1	2.0E	458.3	4.0E	586.5	5000.0E	588.8	4.0E	609.1	5000.0E	1300.0		
* 85.0	0.5M	10.9	1.0M	27.2	0.5M	75.0	4.0E	265.6	2.0E	440.9	4.0E	585.8	5000.0E	589.3	4.0E	596.8
* 90.0	0.5M	10.9	1.0M	27.2	0.5M	75.0	4.0E	238.5	2.0E	363.1	4.0E	546.1	5000.0E	1300.0		
* 95.0	0.5M	10.9	1.0M	27.2	0.5M	75.0	4.0E	218.8	2.0E	302.0	4.0E	471.3	5000.0E	1300.0		
*100.0	0.5M	10.9	1.0M	27.2	0.5M	75.0	4.0E	204.3	2.0E	265.3	4.0E	443.1	5000.0E	1300.0		
*105.0	0.5M	10.9	1.0M	27.2	0.5M	75.0	4.0E	193.1	2.0E	246.3	4.0E	440.3	5000.0E	1300.0		
106.0	2.0E	31.3	4.0E	191.1	2.0E	243.4	4.0E	435.3	5000.0E	1300.0						
110.0	2.0E	29.8	4.0E	184.3	2.0E	237.4	4.0E	413.6	5000.0E	1300.0						
115.0	2.0E	28.3	4.0E	178.4	2.0E	233.6	4.0E	397.7	5000.0E	1300.0						

* - MEASURED RADIAL

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007


EXHIBIT #2J2

WLBA MEASUREMENT DATA - 95°

Point Number	Distance		Field (mV/m)	Notes	Date	Time
	(km)	(mi)				
1	0.65	0.40	465.000		1/4/2007	1038
2	0.97	0.60	445.000		1/4/2007	1042
3	1.16	0.72	415.000		1/4/2007	1045
4	1.22	0.76	400.000		1/4/2007	1047
5	1.29	0.80	385.000		1/4/2007	1049
6	1.35	0.84	370.000		1/4/2007	1051
7	1.58	0.98	236.000		1/4/2007	1056
8	1.80	1.12	193.000		1/4/2007	1059
9	1.96	1.22	178.000		1/4/2007	1102
10	2.16	1.34	162.000		1/4/2007	1104
11	3.81	2.37	53.000		1/4/2007	1213
12	4.14	2.57	35.500		1/4/2007	1216
13	4.56	2.83	49.000		1/4/2007	1220
14	6.83	4.24	25.200		1/4/2007	1224
15	7.17	4.46	20.400		1/4/2007	1229
16	9.02	5.60	18.300		1/4/2007	1234
17	10.20	6.34	12.600		1/4/2007	1239
18	10.90	6.77	10.800		1/4/2007	1241
19	13.00	8.08	7.500		1/4/2007	1246
20	13.90	8.64	6.600		1/4/2007	1249
21	14.10	8.76	6.500		1/4/2007	1251
22	17.30	10.75	4.400		1/4/2007	1258
23	19.80	12.30	5.100		1/4/2007	1304
24	22.00	13.67	2.380		1/4/2007	1309
25	23.10	14.35	2.290		1/4/2007	1312
26	23.90	14.85	2.200		1/4/2007	1315
27	26.50	16.47	1.870		1/4/2007	1318
28	27.20	16.90	1.660		1/4/2007	1321
29	28.80	17.90	1.190		1/4/2007	1325
30	31.00	19.26	1.120		1/4/2007	1333
31	33.20	20.63	0.930		1/4/2007	1337
32	33.60	20.88	0.700		1/4/2007	1340
33	36.20	22.49	0.860		1/4/2007	1344
34	37.90	23.55	0.720		1/4/2007	1350
35	40.10	24.92	0.550		1/4/2007	1355
36	42.60	26.47	0.520		1/4/2007	1400
37	45.80	28.46	0.460		1/4/2007	1406
38	50.60	31.44	0.330		1/4/2007	1413
39	51.00	31.69	0.325		1/4/2007	1414
40	51.90	32.25	0.320		1/4/2007	1417
41	54.10	33.62	0.285		1/4/2007	1422
42	54.80	34.05	0.300		1/4/2007	1425
43	58.90	36.60	0.276		1/4/2007	1445
44	61.20	38.03	0.220		1/4/2007	1448
45	61.80	38.40	0.310		1/4/2007	1450
46	64.20	39.89	0.242		1/4/2007	1454
47	67.00	41.63	0.225		1/4/2007	1500
48	68.70	42.69	0.214		1/4/2007	1504
49	70.80	43.99	0.200		1/4/2007	1510
50	72.30	44.93	0.180		1/4/2007	1514
51	73.00	45.36	0.176		1/4/2007	1517
52	75.00	46.60	0.165		1/4/2007	1523

WLBA AM Measured Field Strength

Shown With Matching Conductivity Curves

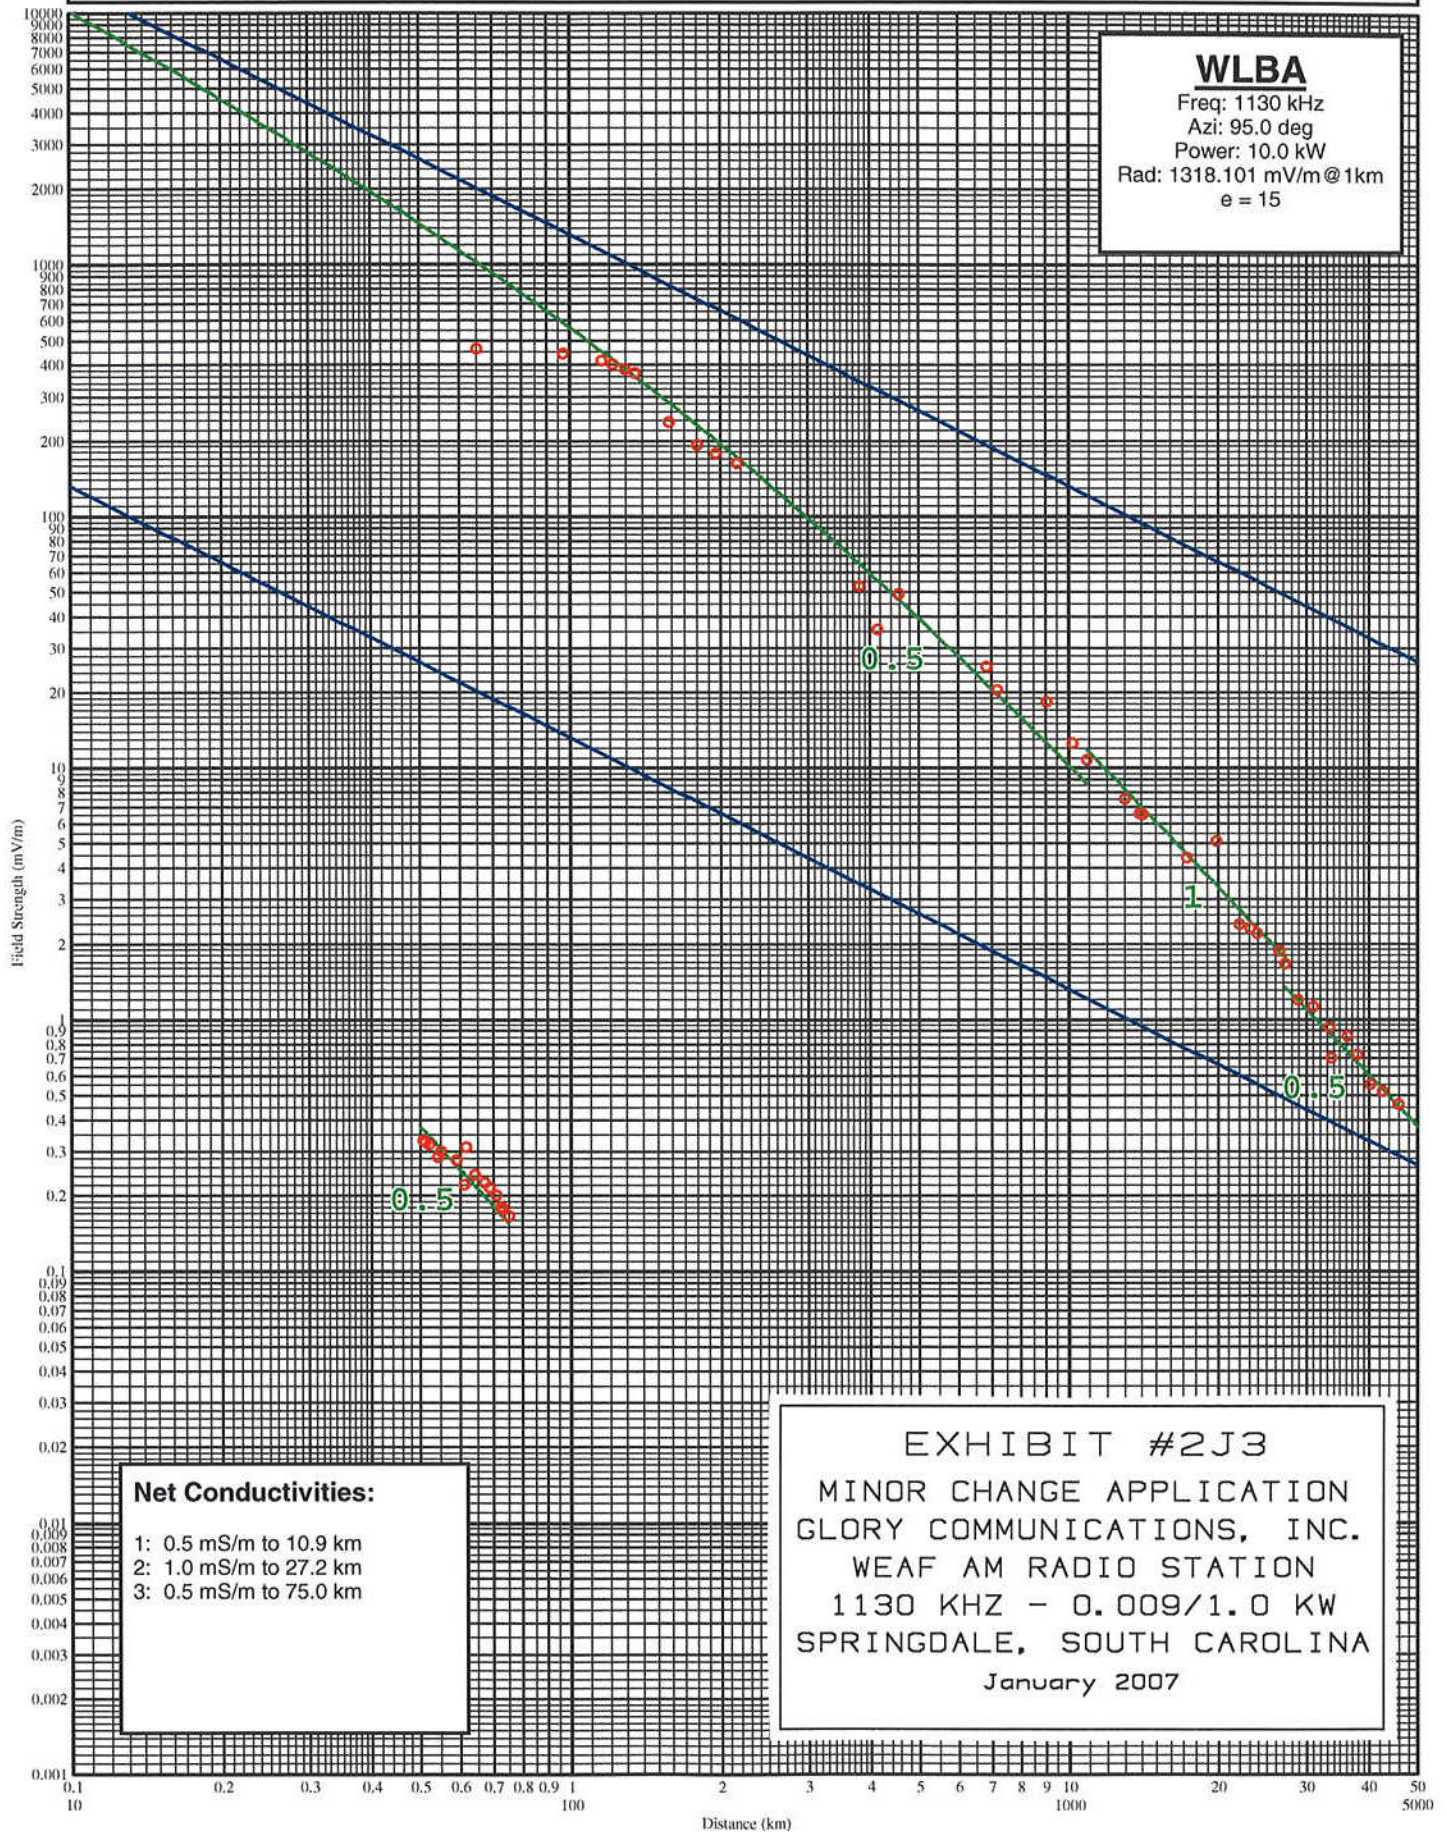

Groundwave Field Strength vs. Distance

Inverse Distance Field: 100.0 mV/m@1km

Family of Curves


1110 - 1170 kHz

Computed for 1140 kHz
 $e = 15$

EXHIBIT #2J4

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
1130 KHZ - 0.009/1.0 KW
SPRINGDALE, SOUTH CAROLINA

January 2007

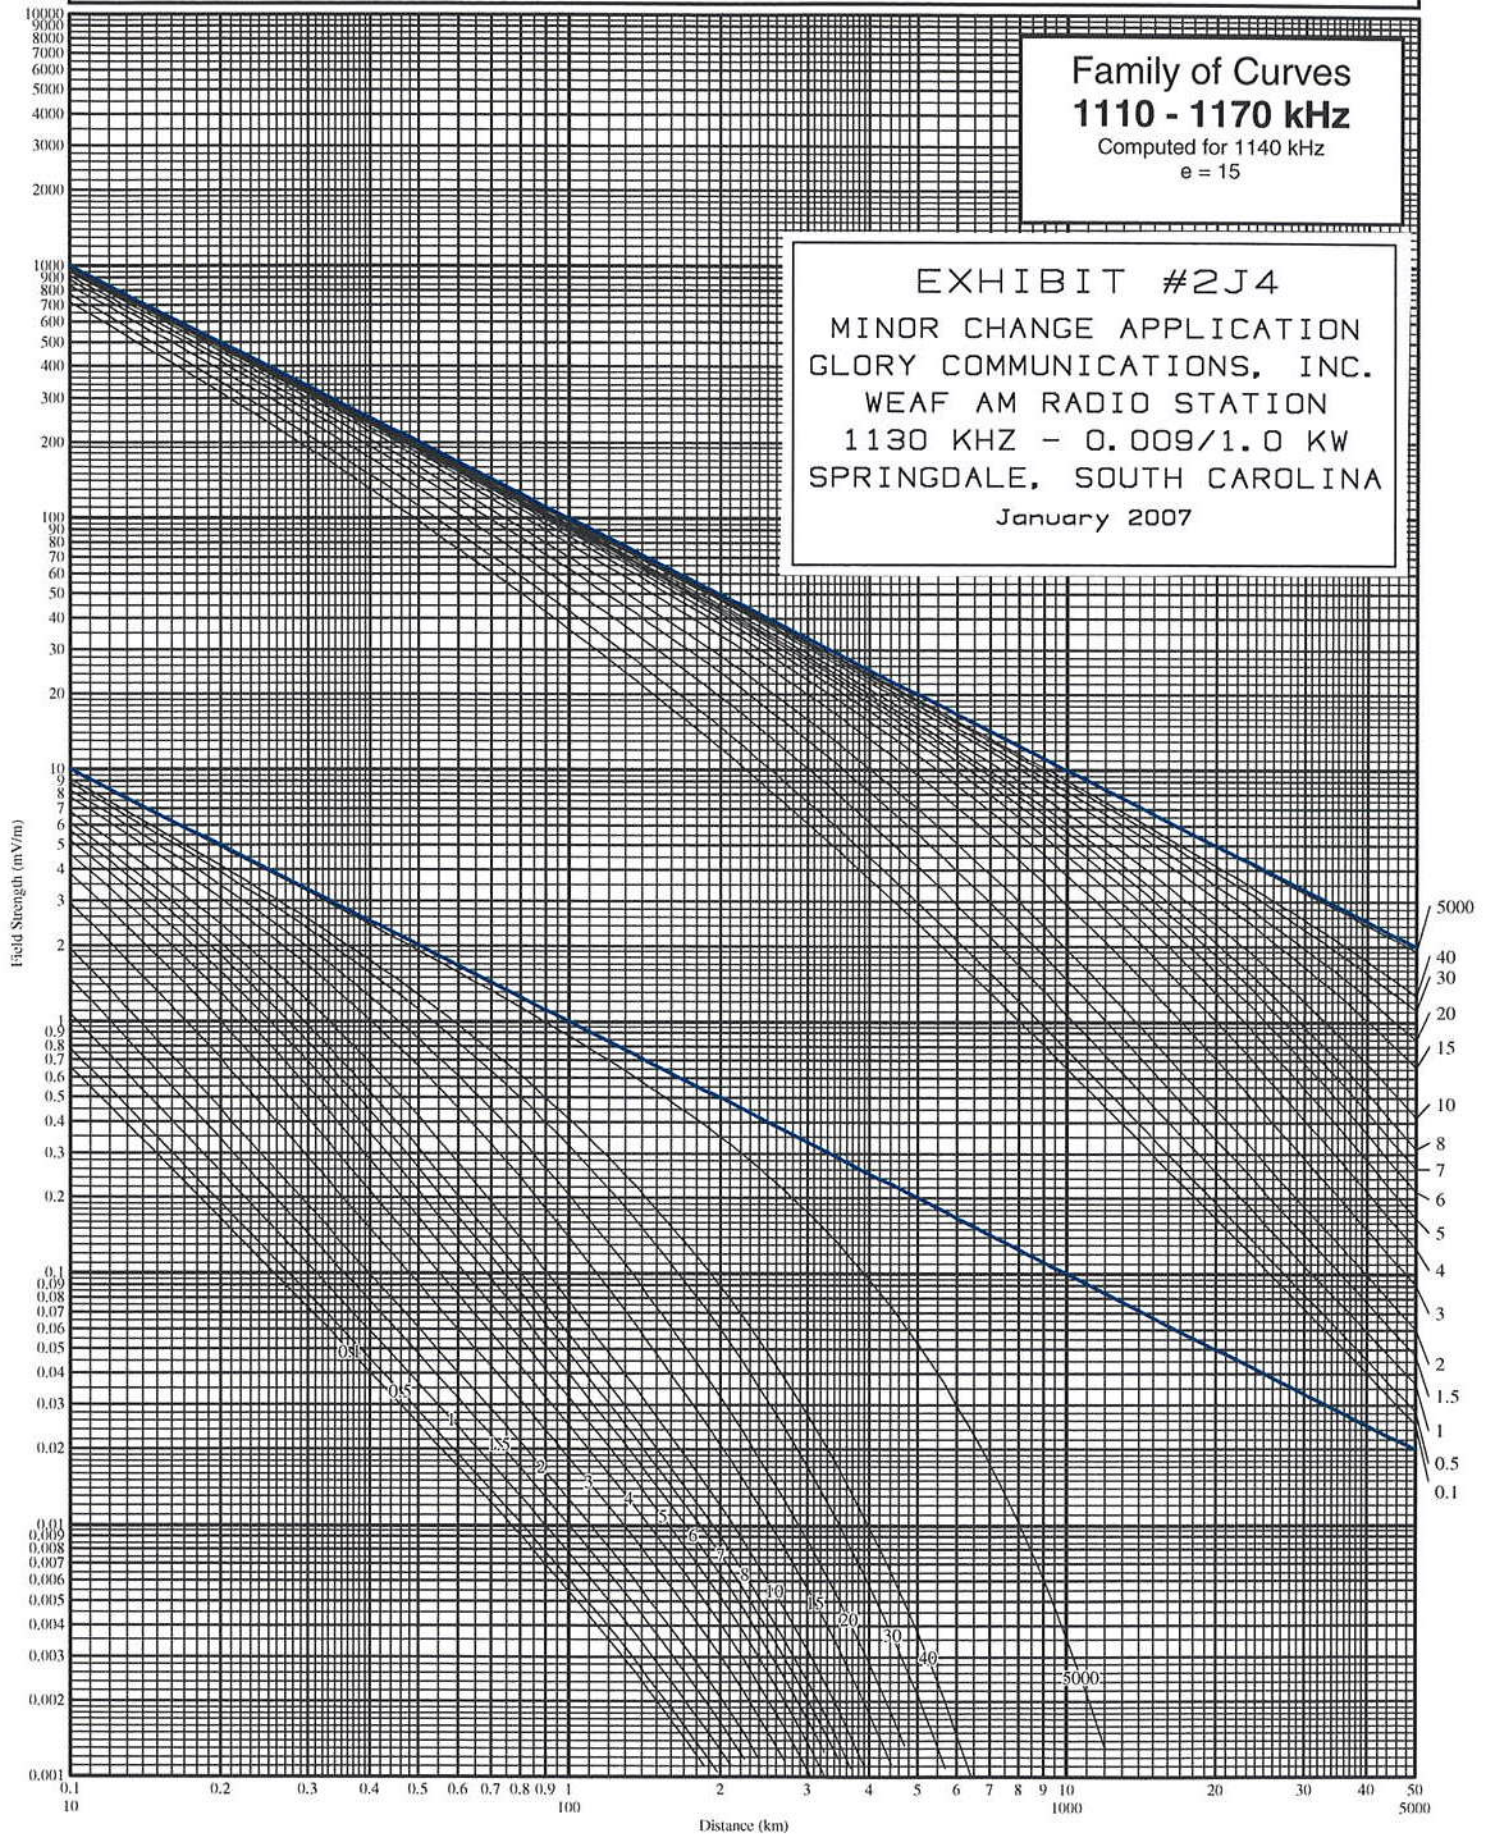

AFAB Enterprises, Inc.

3639 Hwy 414
Landrum, SC 29356

DECLARATION

I declare that I personally made the field intensity measurements for Graham Brock Inc. on Radio Station WLBA 1130 AM in Gainesville, GA. The measurements were made on January 4, 2007 on a bearing of 095 degrees.

I declare that these measurements are true and correct to the best of my knowledge. These measurements were made using Potomac Instruments FIM-41, Serial Number 535, calibrated on 9 March 2005.

Executed on January 5, 2007.



Lewis T. Crain

EXHIBIT #2J5
MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
1130 KHZ - 0.009/1.0 KW
SPRINGDALE, SOUTH CAROLINA
January 2007

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2K

WRNA, China Grove, NC - 1140 kHz - 1.0 kW ND

North Latitude: 35° 34' 20"
West Longitude: 80° 35' 21"

Azimuth	Radiation (mV/m at one km)	Dist to Contours - km:		Azimuth	Radiation (mV/m at one km)	Dist to Contours - km:	
		.500	.250			.500	.250
155.0	334.36	46.26	62.53	185.0	209.04	37.31	50.57
160.0	317.93	45.23	61.15	190.0	186.77	35.24	47.86
165.0	299.20	44.03	59.52	195.0	167.79	33.05	45.11
170.0	278.44	42.63	57.64	200.0	154.73	30.38	42.02
175.0	256.04	41.04	55.51	205.0	150.28	26.93	38.43
180.0	232.59	39.26	53.14	210.0	155.83	23.34	32.83

Conductivity Database Used: US M3

Ground Conductivity Data:
Region conductivity in mS/m followed by distance in km
to the end of region. E - map data; M - measurement data.

Azimuth												
160.0	2.0E	1.1	4.0E	78.0	2.0E	166.2	4.0E	300.3	5000.0E	302.7	4.0E	304.8 5000.0E 1300.0
165.0	2.0E	1.2	4.0E	81.5	2.0E	167.2	4.0E	312.0	5000.0E	1300.0		
170.0	2.0E	1.4	4.0E	85.9	2.0E	169.1	4.0E	331.7	5000.0E	1300.0		
175.0	2.0E	1.5	4.0E	91.6	2.0E	172.4	4.0E	342.3	5000.0E	1300.0		
180.0	2.0E	1.8	4.0E	98.9	2.0E	178.2	4.0E	344.2	8.0E	363.9 5000.0E	835.9	8.0E 1151.2 5000.0E 1300.0
185.0	2.0E	2.2	4.0E	108.3	2.0E	186.4	4.0E	362.1	8.0E	392.3 5000.0E	664.2	2.0E 922.3 8.0E 1077.8
190.0	2.0E	2.8	4.0E	120.8	2.0E	197.1	4.0E	445.6	8.0E	501.0 5000.0E	503.6	8.0E 512.6 5000.0E 518.7
195.0	2.0E	4.0	4.0E	135.3	2.0E	217.3	4.0E	603.0	2.0E	661.4 4.0E	773.0 5000.0E 1300.0	
200.0	2.0E	6.9	4.0E	155.0	2.0E	277.4	4.0E	560.9	2.0E	654.8 4.0E	731.3 5000.0E 1300.0	
205.0	2.0E	13.1	4.0E	185.0	2.0E	342.5	4.0E	532.5	2.0E	695.5 5000.0E	1300.0	
210.0	2.0E	29.7	4.0E	235.9	2.0E	341.0	4.0E	523.5	2.0E	696.3 5000.0E	1300.0	

MINOR CHANGE APPLICATION
GLORY COMMUNICATIONS, INC.
WEAF AM RADIO STATION
has: 1130 kHz - 0.007/1.0 kW ND
CAMDEN, SOUTH CAROLINA
req: 1130 kHz - 0.009/1.0 kW ND
SPRINGDALE, SOUTH CAROLINA
January 2007

EXHIBIT #2L

WAVO, Rock Hill, SC - 1150 kHz - 5.0 kW ND

North Latitude: 34° 56' 55"
West Longitude: 80° 59' 58"

Azimuth	Radiation (mV/m at one km)	Distances to Contours in Kilometers :	
		Contour levels in mV/m.	
		5.000	.250
145.0	687.32	23.22	76.78
150.0	687.32	23.22	76.99
155.0	687.32	23.22	77.30
160.0	687.32	23.22	77.72
165.0	687.32	23.22	78.21
170.0	687.32	23.22	78.81

Conductivity Database Used: US M3

Ground Conductivity Data:									
Region conductivity in mS/m followed by distance in km									
to the end of region. E - map data; M - measurement data.									
Azimuth									
145.0	4.0E	47.9	2.0E	118.2	4.0E	261.1	5000.0E	1300.0	
150.0	4.0E	48.7	2.0E	116.0	4.0E	258.3	5000.0E	1300.0	
155.0	4.0E	50.0	2.0E	114.7	4.0E	266.9	5000.0E	1300.0	
160.0	4.0E	51.7	2.0E	115.1	4.0E	272.9	5000.0E	1300.0	
165.0	4.0E	53.8	2.0E	116.4	4.0E	278.8	5000.0E	1300.0	
170.0	4.0E	56.3	2.0E	118.6	4.0E	275.0	5000.0E	1300.0	