

**PROPOSED KTXV**

**JEFFREY N. EUSTIS**

**890 kHz 2 kW/0.008 kW DA-2**

**FRANKSTON, TEXAS**

**MARCH 2002**

**EXHIBIT E-6.01B**

**PROPOSED NIGHTTIME DIRECTIONAL  
HORIZONTAL RADIATION PATTERN  
UNATTENUATED FIELD AT ONE KILOMETRE**

**STANDARD PATTERN**

**AMENDED**


NL: 32° 15' 54"  
WL: 96° 03' 00"

**ELECTRICAL DESCRIPTION:**

Nom. Power: 0.008 kW  
Theo. RMS : 25.15 mV/m  
RSS : 33.33 mV/m  
Std. RMS : 28.42 mV/m  
Q : 10.0 mV/m  
G : 63.5°

**ARRAY PARAMETERS**

TOWER	RATIO	PHASING	SPACING	AZIMUTH
#1	1.000	+0.0°	0.0°	0.0°
#2	0.400	+12.0°	255.0°	24.0°
#3	0.280	+136.0°	254.4°	4.8°
#4	0.700	+124.0°	85.0°	284.0°
#5	0.420	+131.0°	273.3°	225.6°
#6	0.600	+7.0°	240.0°	208.0°

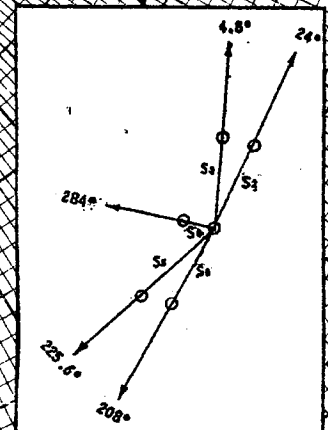

**VIR JAMES P. C.**

**TIMOTHY C. CUTPORTH P.E., DIRECTOR OF ENGINEERING  
BROADCAST ENGINEERING CONSULTANTS  
965 S. IRVING ST. • DENVER, CO 80219  
(303) 937-1900**