

[Exhibit 12]

Non-Interference Compliance

Regarding FCC File Number: BNPFT-20030317JHN

Channel: 275

Description of Exhibit 12 Contents

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all the applicable rule sections and that this application for a construction permit is in full compliance with 47 CFR 74.1204.

Page 2 of this exhibit is an explanation of the tabulated data, which is included as evidence on page 4 of this exhibit.

Page 3 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference protection provisions based on 47 CFR 74.1204(d), which states:

"an application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable."

In addition, page 3 includes a tabulation of the second and third adjacent stations which this application is required to protect and the field strengths of those stations in the vicinity of the proposed translator. The field strengths given were based on contours predicted using FCC contour algorithms and 3 arc second terrain data.

Let it be noted that should any actual real world interference occur, the applicant certifies that it will promptly suspend operation of this translator in accordance with 47 CFR 74.1203.

Page 4 of this exhibit is the tabulated data from the interference analysis, which shows all stations that this application had to consider for contour protection. These tabulated values were generated using high resolution 3 arc second terrain data for the best possible accuracy.

Page 5 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 min quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using a free-space calculation (see FCC 98-117, Appendix A, pg. 41 for reference to the equation used).

Explanation of Frequency Finder Results

The interference analysis for this application was performed using the "Frequency Finder" module in RadioSoft's Comstudy, version 2.2.

Frequency Finder analyzes data taken directly from the FCC's FM database and looks for prohibited overlap with contours of adjacent stations and prohibited proximity to stations 53 or 54 channels from the proposed station (IF) using 3 arc second terrain data and the FCC's contour algorithms. The results tabulated are the stations returned from that analysis. (Note: Because Comstudy was looking at the FCC's FM database, it took into account the proposed translator when doing the analysis and returned it in the tabulated results. For the sake of simplicity, that record has been deleted from all tabulated results.)

The first several columns of the table are self-explanatory. They give various data on the stations in question. The column labeled "Clr" gives the proposed translator's "clearance" with respect to the tabulated station, either in dB or km. The values listed with no units are given in km and are for stations located on an IF to the proposed site's channel.

A negative value in the "Clr" column does NOT necessarily represent prohibited contour overlap, as explained below.

A negative value listed in the "Clr" column would indicate either overlap of interference and protected contours or prohibited proximity to an IF station except in the following situations:

-Since the proposed station's Effective Radiated Power (ERP) is 9 watts, a negative value in km (no units listed in the table) does not represent a violation of the CFR, according to 47 CFR 1204(g), which states that "FM translator stations and booster stations operating with less than 100 watts ERP will be treated as class D stations and will not be subject to intermediate frequency separation requirements."

- A second or third adjacent LP100 station cannot represent a violation of the CFR, as 47 CFR 74.1204(a)(4) requires protection of only co-channel and first adjacent LP100 stations.

- 47 CFR 74.1204(a) requires only the protection of "AUTHORIZED commercial or noncommercial educational FM broadcast stations, FM translators, ..." Any entry with a status listed as "RSV," "USE" or "APP" does not represent an authorized station and therefore is not protected under 47 CFR 74.1204. The one exception is the case of LP100 applications. The note to 47 CFR 74.1204(a)(4) states that "LPFM applications and permits that have not yet been licensed must be considered as operating with the maximum permitted facilities." Therefore, any first adjacent or co-channel LP100 station, no matter the status, is protected.

-Entries highlighted in red are those stations where there is overlap of predicted contours and lack of population has been demonstrated within the area of interference.

Compliance with 47 CFR 74.1204(d)

The proposed translator's Maximum Effective Radiated Power (ERP) is 0.009kW at 145 meters above ground level. According to 47 CFR, 74.1204(a), the desired to undesired ratio between 2nd/3rd adjacent stations is 40dB, making the proposed translator's interfering contour 105.6dBu F(50,10).

Using a free-space calculation (equation referenced in FCC 98-117, Appendix A, pg. 41), this proposed translator's F(50,10) interference contour was calculated and plotted on the pertinent portion of a USGS quadrangle (page 5 of this exhibit). As demonstrated on the quadrangle, there are no populated structures or highways within the calculated area of interference (Note: FCC 02-244, II, A, 6 states that USGS quadrangles are sufficient for demonstrating lack of population). Hence, in accordance with 47 CFR 74.1204(d) and the clarification provided by the FCC in the decision Re: Living Way Ministries (FCC 02-244), a lack of population has been demonstrated within the area of interference and therefore this application is in full compliance with 47 CFR 74.1204.

CORAGL: 145m

Antenna Manufacturer: SWR

Maximum ERP: 0.009kW

Antenna Model: 2FM1-0.5

F(50,10) Interfering Contour: 105.6dBu

F(50,10) Max Distance: 110.4m


The F(50,50) signal strength of all relevant second and third adjacent stations have been examined, and are tabulated below. Column three shows the station's signal level at the proposed translator's tower site, and column four gives the minimum value within the entire proposed translator's standard F(50,10) contour (100 dBu for most classes, 94 dBu for class B's, 97 dBu for class B1's). For signal levels too great to determine, 999 was entered. The minimum F(50,50) contour within the proposed translator's standard F(50,10) contour was used to calculate the proposed translator's interference contour, thereby assuring a minimum undesired-to-desired ratio of 40dB for all relevant adjacent stations, as required in 47 CFR, 74.1204(a).

FCC File Number	Call Sign	F(50,50) Contour at Tower	Min. F(50,50) Contour
BPFTB20030731APU	KFTZ-FM1	69.7dBu	67.7dBu
BLH19871216KF	KMGI	104.6dBu	103.4dBu
BLH19940420KB	KFTZ	65.9dBu	65.6dBu

Minimum F(50,50) Protected Contour of Adjacent Station
Within Proposed Translator's standard F(50,10) Contour: **65.6dBu**

Frequency Finder

Callsign	State	City	Channel	ERP_w	Licensee	ARN	Class	Status	Distance_km	Cir	Facility_id
KMGI	ID	POCATELLO	273	100000	PACIFIC EMPIRE COMMUNICATIONS CORP.	BLH19871216KF	C	LIC	8.14	-45.39 dB	51215
KMGI	ID	POCATELLO	273	0	PACIFIC EMPIRE COMMUNICATIONS CORP.		C	USE	8.14	-13.90 dB	51215
KFTZ-FM1	ID	POCATELLO	277	2000	WESTERN BROADCASTING, LS, LLC	BPFTB20030731APU	D	CP	7.26	-11.77 dB	18118
KPPC	ID	POCATELLO	221	6000	INTERMART BROADCASTING POCATELLO INC	BPH19970724M1	A	CP	0	-10	87656
KFTZ	ID	IDAHO FALLS	277	100000	WESTERN BROADCASTING, LS, LLC	BLH19940420KB	C1	LIC	59.99	-5.94 dB	18116
970722MF	ID	POCATELLO	221	0	JAMES W. FOX		A	USE	4.59	-5.4	87578
KFTZ-FM1	ID	POCATELLO	277	90	WESTERN BROADCASTING, LS, LLC	BLFTB19940328TE	D	LIC	7.26	1.67 dB	18118
NEW	UT	WELLSVILLE	275	250	SUN VALLEY RADIO, INC.	BNPFT20030317KWQ	D	APP	156.91	16.21 dB	157279
NEW	UT	WELLSVILLE	275	130	SUN VALLEY RADIO, INC.	BNPFT20030828AZM	D	APP	156.91	19.05 dB	157279
K275AB	WY	FREEDOM	275	10	LOWER STAR VALLEY TV ASSOCIATION	BLFT19951023TJ	D	LIC	109.32	22.34 dB	38925
KMVX	ID	JEROME	275	100000	KART BROADCASTING CO., INC.	BLH7122	C1	LIC	163.22	26.32 dB	33446
K272AG	ID	SODA SPRINGS, B	272	55	CARIBOU COUNTY TV	BLFT143	D	LIC	69.28	26.57 dB	8810
KWYS-FM	ID	ISLAND PARK	275	46000	ALPINE BROADCASTING LIMITED PARTNERSHIP	BLH19981029KA	C	LIC	199.86	27.26 dB	83882
	ID	RUPERT	275	0		RMbg-4	C0	APP	115.3	27.55 dB	0
NEW	WY	HOBACK JUNCTIO	274	10	TED W. AUSTIN, JR.	BNPFT20030314BEB	D	APP	144.23	32.68 dB	145904
KFTZ	ID	IDAHO FALLS	277	0	WESTERN BROADCASTING, LS, LLC		C1	USE	83.04	37.92 dB	18116
KWKD	UT	RANDOLPH	272	89000	MILLCREEK BROADCASTING, L.L.C.	BMPH20020214AAM	C	CP MOD	256.49	37.71 dB	88272
KWKD	UT	RANDOLPH	272	89000	MILLCREEK BROADCASTING, L.L.C.	BLH20030729AEW	C	APP	256.49	37.71 dB	88272
KQMB	UT	MIDVALE	274	25000	SIMMONS-SLC, LS, LLC	BLH20021113AAL	C	LIC	251.13	37.19 dB	54156
KWKD	UT	RANDOLPH	272	89000	MILLCREEK BROADCASTING, L.L.C.	BLH20001116AAO	C	LIC	256.49	38.08 dB	88272
KRSP-FM	UT	SALT LAKE CITY	278	25000	SIMMONS-SLC, LS, LLC	BLH20021113AAM	C	LIC	251.13	38.47 dB	27462

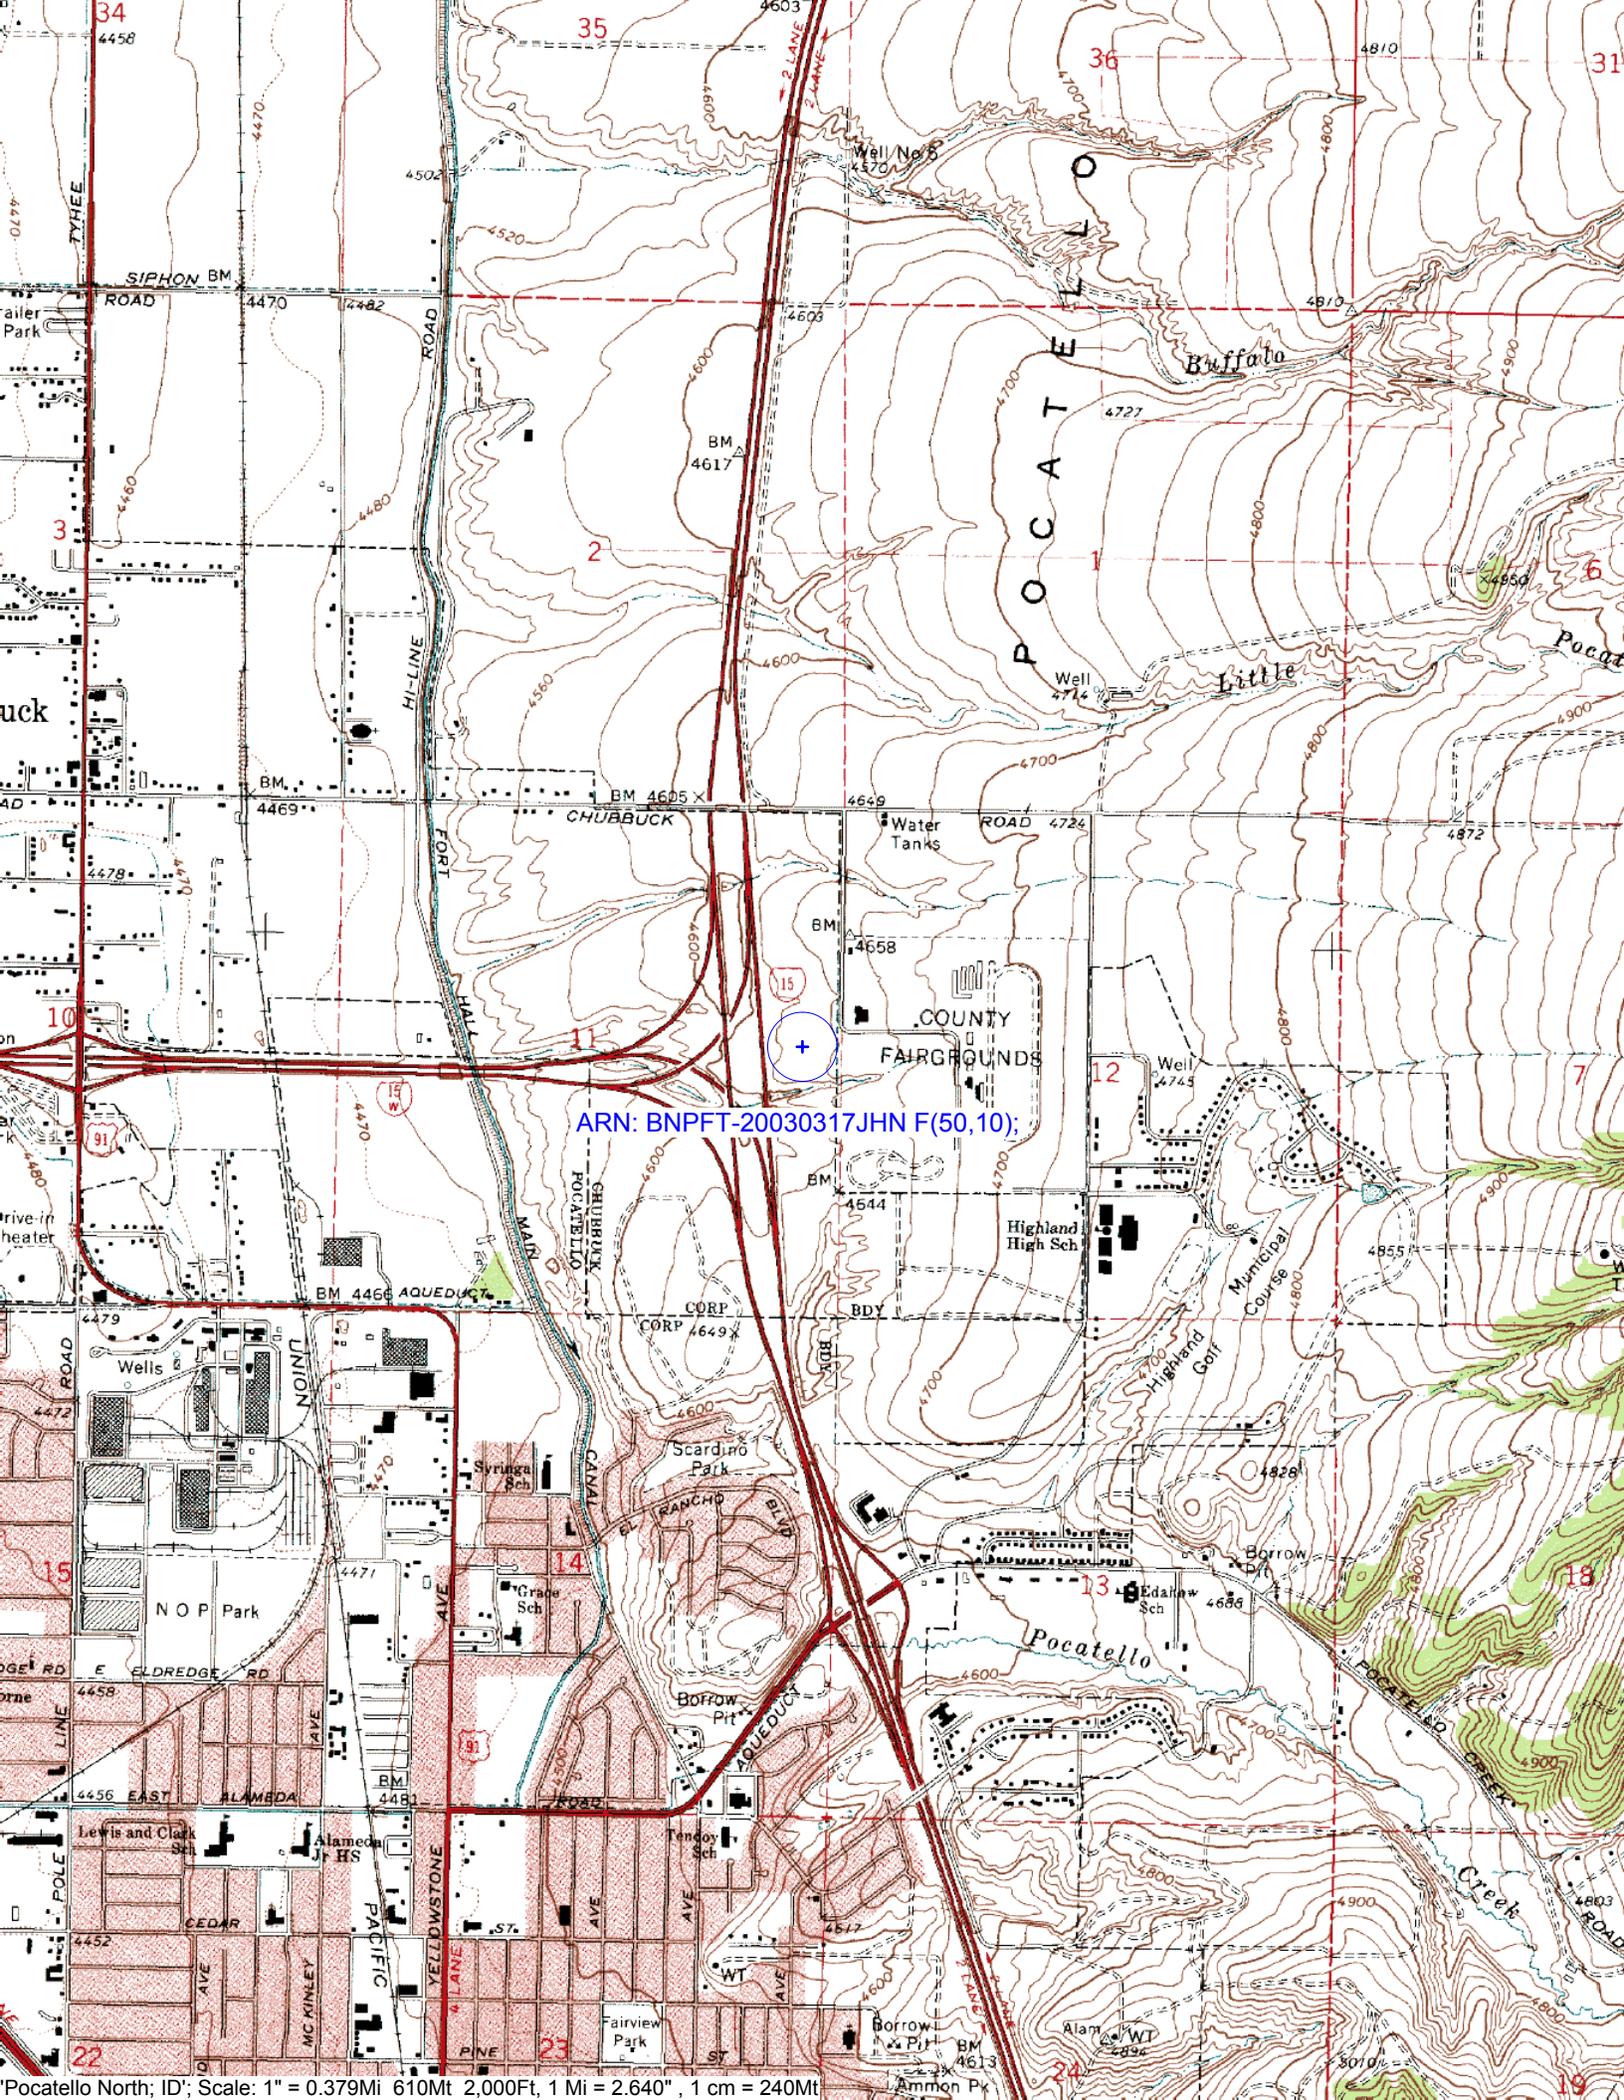

ARN: BNPFT-20030317JHN F(50,10);