


KFBK-FM BEXT TFL3Y Directional Antenna Data

Site: KFBK-FM
 Antenna: BEXT TFL3Y
 Freq: 93.10000 MHz
 ERP: 10.00 kW

Pattern Image

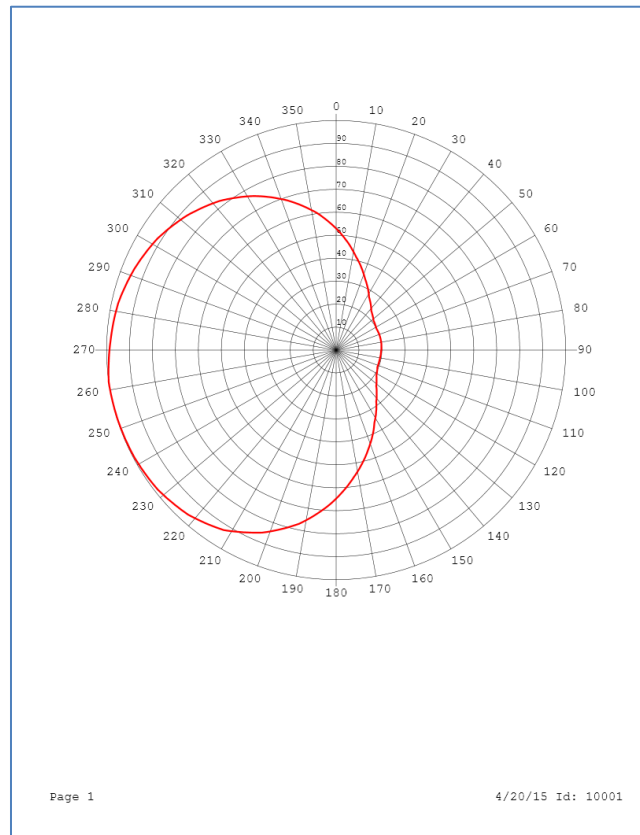

ERP Along Radial in Degree True

Bring	ERP kW	Bring	ERP kW	Bring	ERP kW	Bring	ERP kW	Bring	ERP kW	Bring	ERP kW
0	2.8	7	2.14	14	1.6	21	1.18	28	0.88	35	0.67
1	2.7	8	2.06	15	1.54	22	1.13	29	0.84	36	0.65
2	2.61	9	1.97	16	1.47	23	1.08	30	0.81	37	0.62
3	2.51	10	1.89	17	1.41	24	1.04	31	0.77	38	0.6
4	2.42	11	1.81	18	1.35	25	1	32	0.73	39	0.58
5	2.32	12	1.73	19	1.3	26	0.96	33	0.71	40	0.56
6	2.24	13	1.66	20	1.24	27	0.92	34	0.69	41	0.54

ERP Along Radial in Degree True -Continued

Bring	ERP kW	Bring	ERP kW	Bring	ERP kW	Bring	ERP kW	Bring	ERP kW	Bring	ERP kW
42	0.52	83	0.39	124	0.45	165	2.35	206	7.8	247	9.92
43	0.51	84	0.39	125	0.46	166	2.45	207	7.92	248	9.92
44	0.5	85	0.39	126	0.48	167	2.56	208	8.05	249	9.94
45	0.49	86	0.39	127	0.49	168	2.66	209	8.15	250	9.94
46	0.48	87	0.39	128	0.5	169	2.77	210	8.28	251	9.94
47	0.48	88	0.39	129	0.51	170	2.88	211	8.41	252	9.96
48	0.46	89	0.38	130	0.52	171	2.99	212	8.54	253	9.96
49	0.45	90	0.38	131	0.54	172	3.11	213	8.61	254	9.96
50	0.45	91	0.38	132	0.55	173	3.24	214	8.69	255	9.96
51	0.44	92	0.38	133	0.57	174	3.36	215	8.76	256	9.96
52	0.43	93	0.38	134	0.6	175	3.49	216	8.84	257	9.98
53	0.42	94	0.38	135	0.62	176	3.62	217	8.91	258	9.98
54	0.42	95	0.38	136	0.65	177	3.76	218	8.99	259	9.98
55	0.42	96	0.38	137	0.67	178	3.89	219	9.06	260	9.98
56	0.41	97	0.38	138	0.7	179	4.03	220	9.14	261	9.98
57	0.41	98	0.38	139	0.72	180	4.17	221	9.22	262	10
58	0.41	99	0.38	140	0.75	181	4.32	222	9.29	263	9.96
59	0.4	100	0.38	141	0.78	182	4.48	223	9.33	264	9.92
60	0.4	101	0.38	142	0.81	183	4.61	224	9.37	265	9.9
61	0.4	102	0.38	143	0.85	184	4.75	225	9.41	266	9.86
62	0.4	103	0.38	144	0.89	185	4.9	226	9.45	267	9.84
63	0.4	104	0.38	145	0.93	186	5.04	227	9.51	268	9.8
64	0.4	105	0.38	146	0.97	187	5.2	228	9.55	269	9.76
65	0.4	106	0.38	147	1.02	188	5.34	229	9.58	270	9.74
66	0.4	107	0.38	148	1.07	189	5.49	230	9.62	271	9.7
67	0.4	108	0.38	149	1.12	190	5.66	231	9.66	272	9.68
68	0.4	109	0.38	150	1.16	191	5.81	232	9.72	273	9.64
69	0.4	110	0.38	151	1.21	192	5.98	233	9.72	274	9.62
70	0.4	111	0.38	152	1.27	193	6.1	234	9.74	275	9.6
71	0.4	112	0.38	153	1.33	194	6.23	235	9.76	276	9.56
72	0.4	113	0.38	154	1.41	195	6.37	236	9.78	277	9.55
73	0.4	114	0.38	155	1.48	196	6.5	237	9.8	278	9.53
74	0.4	115	0.39	156	1.56	197	6.64	238	9.82	279	9.49
75	0.4	116	0.4	157	1.64	198	6.77	239	9.84	280	9.47
76	0.4	117	0.4	158	1.71	199	6.91	240	9.86	281	9.45
77	0.4	118	0.4	159	1.8	200	7.06	241	9.88	282	9.43
78	0.4	119	0.41	160	1.88	201	7.19	242	9.9	283	9.37
79	0.4	120	0.42	161	1.97	202	7.34	243	9.9	284	9.33
80	0.4	121	0.42	162	2.06	203	7.45	244	9.9	285	9.27
81	0.4	122	0.43	163	2.15	204	7.57	245	9.9	286	9.24
82	0.4	123	0.44	164	2.25	205	7.69	246	9.92	287	9.2

ERP Along Radial in Degree True -Continued

Bring	ERP kW	Bring	ERP kW	Bring	ERP kW	Bring	ERP kW	Bring	ERP kW	Bring	ERP kW
288	9.14	300	8.52	312	7.66	324	6.58	336	5.33	348	4.03
289	9.1	301	8.46	313	7.55	325	6.46	337	5.21	349	3.93
290	9.04	302	8.41	314	7.46	326	6.37	338	5.11	350	3.83
291	9.01	303	8.32	315	7.38	327	6.27	339	5	351	3.73
292	8.97	304	8.24	316	7.29	328	6.16	340	4.9	352	3.64
293	8.91	305	8.17	317	7.21	329	6.07	341	4.79	353	3.52
294	8.85	306	8.1	318	7.12	330	5.96	342	4.69	354	3.41
295	8.8	307	8.03	319	7.04	331	5.87	343	4.57	355	3.31
296	8.74	308	7.94	320	6.96	332	5.78	344	4.46	356	3.2
297	8.69	309	7.87	321	6.87	333	5.66	345	4.36	357	3.1
298	8.63	310	7.8	322	6.79	334	5.55	346	4.25	358	2.99
299	8.57	311	7.73	323	6.67	335	5.43	347	4.15	359	2.89