

**Exhibit 11 Page 1**

**Covenant Broadcasting Company of Statesville, Inc.**

**Second-Adjacent Waiver Request**

**Statesville, NC**

The proposed LPFM station will broadcast on channel 273, which is within the 73 kilometers, second-adjacent minimum distance separation of station WLKO on channel 275. The WLKO interfering contour at the LPFM tower site is 68.4 dB $\mu$  F(50,50). Using the ratio of 100:1 (LPFM to WLKO) on the second-adjacent channel, the population within the proposed LPFM 108.4 dB $\mu$  contour is zero. Using the antenna manufacturer's vertical radiation pattern the area of interference can be more accurately calculated geometrically, rather than just by using the free space equation alone. This particular antenna is a two bay full-wave spaced Shively 6812b antenna. It was determined from the manufacturer's vertical plan that at 60 degrees below horizontal the interference area would extend 36.4 meters toward the ground. The antenna radiation center 45 meters above ground, thus the interference area will never reach the ground. There are no occupied structures or elevated roadways within the interference area of the translator. Therefore, the application is in compliance with §73.807(e)(1)


*Waiver of the second-adjacent channel separations.*

# Exhibit 11 Figure 1

## Minimum Ground Clearance

Depression Angle Below Horizontal	Antenna Relative Field	ERP (Watts)	Distance to interfering Contour from Antenna (m)	Horizontal Distance of Interfering contour from tower (m)	Vertical Clearance of Interfering contour above TGL (m)
5	0.969	19.7	118	117.6	34.7
10	0.881	16.3	108	106.4	26.2
15	0.745	11.7	91	87.9	21.4
20	0.576	7.0	71	66.7	20.7
25	0.389	3.2	48	43.5	24.7
30	0.203	0.9	27	23.4	31.5
35	0.032	0.0	0	0.0	45.0
40	0.112	0.3	27	20.7	27.6
45	0.224	1.1	28	19.8	25.2
50	0.299	1.9	37	23.8	16.7
55	0.339	2.4	41	23.5	11.4
60	0.347	2.5	42	21.0	8.6
65	0.328	2.3	40	16.9	8.7
70	0.288	1.7	35	12.0	12.1
75	0.231	1.1	28	7.2	18.0
80	0.162	0.6	27	4.7	18.4
85	0.085	0.2	27	2.4	18.1
90	0.000	0.0	0	0.0	45.0
Minimum Clearance above TGL:					8.6

**Elevation pattern**

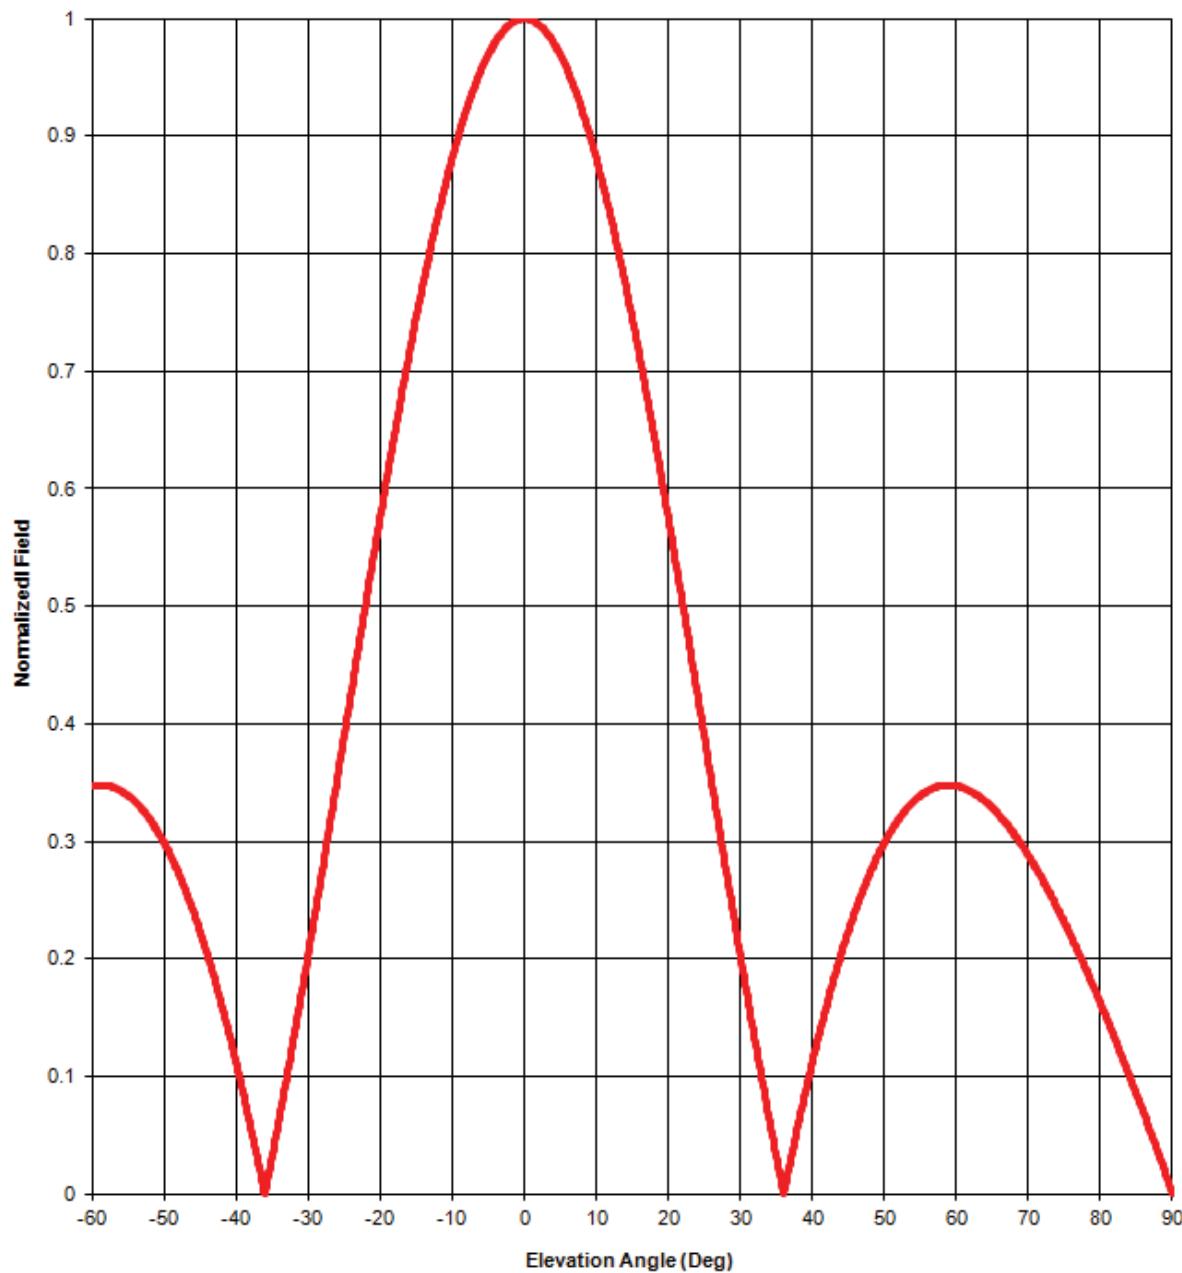

Antenna model: 6812b, 2-bay full-wave-spaced

Test frequency: 98.1 MHz

Gain (maximum):

Power	dB
1.00	0.02 dB

Document No. 6812b 2-bay fw (130701)

A Division of Howell Laboratories, Inc., P. O. Box 389, Bridgton, Maine 04009 USA

(207) 647-3327

1-888-SHIVELY

Fax: (207)647-8273

An Employee-Owned Company

[www.shively.com](http://www.shively.com)

[sales@shively.com](mailto:sales@shively.com)

Certified to ISO-9001

Degrees	Rel. Field
1	0.999
2	0.995
3	0.989
4	0.980
5	0.969
6	0.956
7	0.941
8	0.923
9	0.903
10	0.881
11	0.858
12	0.832
13	0.805
14	0.776
15	0.745
16	0.714
17	0.681
18	0.647

Degrees	Rel. Field
19	0.612
20	0.576
21	0.539
22	0.502
23	0.465
24	0.427
25	0.389
26	0.352
27	0.314
28	0.277
29	0.240
30	0.203
31	0.168
32	0.132
33	0.098
34	0.065
35	0.032
36	0.001

Degrees	Rel. Field
37	0.029
38	0.058
39	0.086
40	0.112
41	0.137
42	0.161
43	0.183
44	0.204
45	0.224
46	0.242
47	0.258
48	0.273
49	0.287
50	0.299
51	0.310
52	0.319
53	0.327
54	0.334

Degrees	Rel. Field
55	0.339
56	0.343
57	0.346
58	0.348
59	0.348
60	0.347
61	0.345
62	0.343
63	0.339
64	0.334
65	0.328
66	0.322
67	0.315
68	0.306
69	0.298
70	0.288
71	0.278
72	0.267

Degrees	Rel. Field
73	0.256
74	0.244
75	0.231
76	0.218
77	0.205
78	0.191
79	0.177
80	0.162
81	0.148
82	0.132
83	0.117
84	0.101
85	0.085
86	0.069
87	0.052
88	0.036
89	0.018
90	0.000

### Elevation Pattern Tabulation

Antenna model: 6812b, 2-bay full-wave-spaced

Relative Field at 0° Depression = 1.000

## Exhibit 11 Figure 2 Page 2 Manufacturer Elevation Pattern

**Exhibit 11 Figure 3**  
**Covenant Broadcasting Company of Statesville, Inc.**  
**Aerial Photo of the Vicinity Surrounding the Proposed Tower Site**  
**Statesville, NC**

