
Ocala, FL - WOGK(FM) (Digital Notification)


Compliance with Radiofrequency Radiation Guidelines

The proposed facility complies with the maximum permissible radiofrequency electromagnetic exposure limits for controlled and uncontrolled environments as set forth under §1.1307(b)(3) of the Commission's rules and the guidelines for RF radiation protection guidelines as set forth in OET Bulletin No. 65 (Edition 97-01), and the accompanying Supplement A, (Edition 97-01). The site is intended to house multiple transmitters, therefore the potential for human exposure to non-ionizing radiofrequency radiation has been evaluated with regard to the §1.1307(b)(3) "five percent (5%) contribution rule" utilizing the Commission's own FM Model web-based software application. The use and implementation of this FCC sanctioned software is a matter of record before the Commission.

With regard to the "five percent (5%) contribution rule", §1.1307(b)(3), five percent (5%) of the maximum permissible $200 \mu\text{W}/\text{cm}^2$ uncontrolled limit yields a threshold value of $10 \mu\text{W}/\text{cm}^2$. Five percent (5%) of the maximum permissible $1000 \mu\text{W}/\text{cm}^2$ controlled limit yields a threshold value of $50 \mu\text{W}/\text{cm}^2$. Therefore, single contributions of $\leq 10 \mu\text{W}/\text{cm}^2$ remain within the tolerances as allowed by §1.1307(b)(3) and its governing OET Bulletin No. 65 (Edition 97-01) for the more restrictive of these two protections.

The WOGK(FM) - Ocala, FL analog FM Station (Facility ID: 49962), operates on CH229C0(93.7 MHz) with 100.0 kW ERP circular polarization (H&V). This facility operates with an antenna COR mounted 401.1 meters above ground level (AGL). The facility employs an eight bay, Jampro model JHPC-8 antenna employing EPA Type 2 "Opposed V Dipole" elements as defined by the Commission's own FM Model - Appendix B (issued March 31, 2016). The antenna elements are spaced 1.0 wavelength (λ) apart. WOGK(FM) operates with HD/IBOC facilities of -14 dBc power (4.0 kW ERP) circular polarization (H&V) (or $\text{Log}[0.04]*10 = -14 \text{ dBc}$) from the main antenna mounted 401.1 meters AGL. Therefore, a combined power of 104.0 kW (H&V) has been assumed for this contribution.

The results of the evaluation for the FM station have been shown at the end of this RF compliance discussion. To ensure complete protection, the maximum FM contribution has been assumed without regard to any restricted access fencing distance. In addition, the facility is, or will be, properly marked with signs. Entry is, or will be, restricted by means of fencing with locked doors or gates. Furthermore, coordination with other users of the site will be secured to reduce power or cease operation as necessary to protect persons having access to the site, tower or antenna from radiofrequency electromagnetic fields in excess of FCC guidelines.

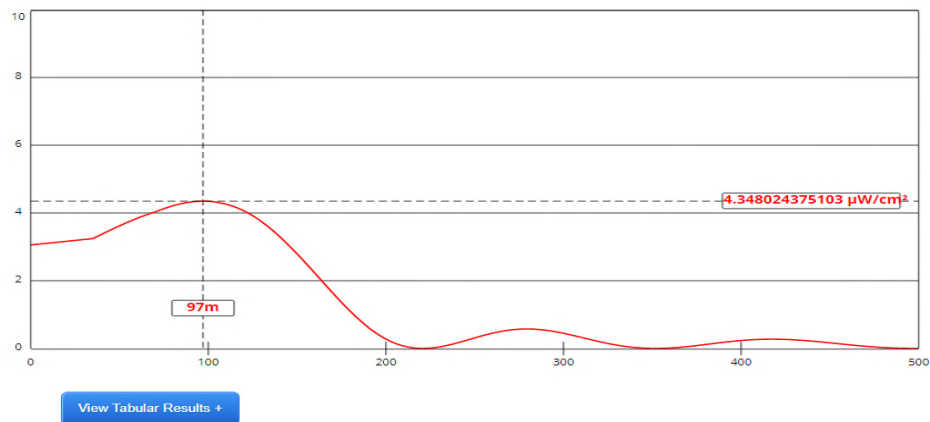

Channel Selection	Channel 229 (93.7 MHz)		
Antenna Type +	EPA Type 2: Opposed V Dipole		
Height (m)	401.1	Distance (m)	500
ERP-H (W)	104000	ERP-V (W)	104000
Num of Elements	8	Element Spacing (λ)	1
Num of Points	500	Apply	