
RF Appendix 1


Compliance with Radiofrequency Radiation Guidelines

The proposed facility complies with the maximum permissible radiofrequency electromagnetic exposure limits for controlled and uncontrolled environments as set forth under §1.1307(b)(3) of the Commission's rules and the guidelines for RF radiation protection guidelines as set forth in OET Bulletin No. 65 (Edition 97-01), and the accompanying Supplement A, (Edition 97-01). The site is intended to house multiple transmitters, therefore the potential for human exposure to non-ionizing radiofrequency radiation has been evaluated with regard to the §1.1307(b)(3) "five percent (5%) contribution rule" utilizing the Commission's own FM Model web-based software application. The use and implementation of this FCC sanctioned software is a matter of record before the Commission.

With regard to the "five percent (5%) contribution rule", §1.1307(b)(3), five percent (5%) of the maximum permissible 200 $\mu\text{W}/\text{cm}^2$ uncontrolled limit yields a threshold value of 10 $\mu\text{W}/\text{cm}^2$. Five percent (5%) of the maximum permissible 1000 $\mu\text{W}/\text{cm}^2$ controlled limit yields a threshold value of 50 $\mu\text{W}/\text{cm}^2$. Therefore, single contributions of $\leq 10 \mu\text{W}/\text{cm}^2$ remain within the tolerances as allowed by §1.1307(b)(3) and its governing OET Bulletin No. 65 (Edition 97-01) for the more restrictive of either two protections.

The proposed W263DE.P - Greenfield, MA analog FM Translator (Facility ID: 201279) will operate on CH263D (100.5 MHz) with 0.250 kW ERP circular polarization (H&V); and be diplexed with W298CA.L - Greenfield, MA analog FM Translator (Facility ID: 25008), License Number BLFT-20160608HSV, which operates on CH298D (107.5 MHz) with 0.250 kW ERP circular polarization (H&V). The combined power(s) of 0.500 kW ERP circular polarization (H&V) will broadcast from an antenna COR mounted 38.0 meters above ground level (AGL). The combined operation will employ a two (2) Nicom Model BKG77/2L "Opposed V Dipole" antenna. The elements are assumed at a worst case 1.0 wavelength (λ) apart. The antenna employs EPA Type 2 elements as defined by the Commission's own FM Model - Appendix B (issued March 31, 2016). Neither facility will operate with HD/IBOC facilities at this time.

The results of the evaluation for the FM station have been shown at the end of this RF compliance discussion. To ensure complete protection, the maximum FM contribution has been assumed without regard to any restricted access fencing distance. In addition, the facility is, or will be, properly marked with signs. Entry is, or will be, restricted by means of fencing with locked doors or gates. Furthermore, coordination with other users of the site will be secured to reduce power or cease operation as necessary to protect persons having access to the site, tower or antenna from radiofrequency electromagnetic fields in excess of FCC guidelines.

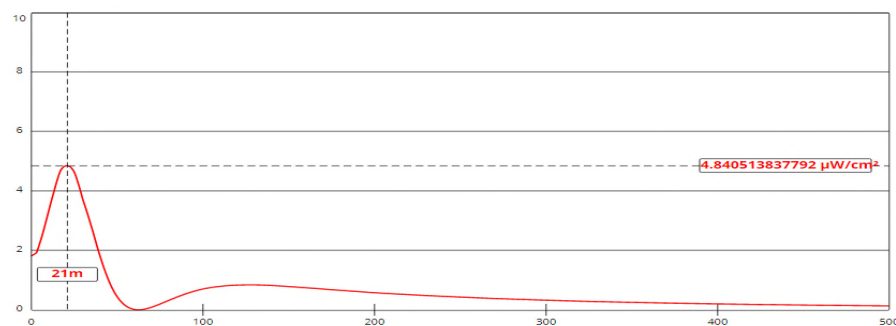

[View Tabular Results +](#)

Channel Selection	Channel 263 (100.5 MHz) ▾		
Antenna Type +	EPA Type 2: Opposed V Dipole ▾		
Height (m)	<input type="text" value="38"/>	Distance (m)	<input type="text" value="500"/>
ERP-H (W)	<input type="text" value="500"/>	ERP-V (W)	<input type="text" value="500"/>
Num of Elements	<input type="text" value="2"/>	Element Spacing (λ)	<input type="text" value="1"/>
Num of Points	<input type="text" value="500"/>	<input type="button" value="Apply"/>	