



Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

***Directional Antenna System  
for  
KFLV, Wilber, Nebraska***

May 1, 2007

Electronics Research Inc. is providing a custom fabricated antenna system that is specially designed to meet the FCC requirements and the general needs of radio station KFLV.

The antenna is the ERI model LP-2E-DA configuration. The circular polarized system consists of 2 full-wavelength spaced bays using one driven circular polarized radiating element, two horizontal parasitic elements placed one quarter wave above and below each bay and two vertical parasitic elements per bay. The antenna was mounted on the North 257 degrees East tower face with bracketry to provide an antenna orientation of North 257 degrees East. The antenna was tested on a 48" face tower, which is the structure the station plans to use to support the array. All tests were performed on a frequency of 89.9 megahertz, which is the center of the FM broadcast channel assigned to KFLV.

Pattern measurements were made on a sixty-acre antenna pattern range that is owned and operated by Electronics Research, Inc. The tests were performed under the direction of Thomas B. Silliman, president of Electronics Research, Inc. Mr. Silliman has the Bachelor of Electrical Engineering and the Master of Electrical Engineering degrees from Cornell University and is a registered professional engineer in the states of Indiana, Maryland and Minnesota.

# Directional Antenna System Proposed For KFLV, Wilber, Nebraska


(Continued)

## DESCRIPTION OF THE TEST PROCEDURE

The test antenna consisted of the complete circular polarized system with the associated horizontal and vertical parasitic elements. The elements and brackets that were used in this test are electrically equivalent to those that will be supplied with the antenna. A section of 1 5/8 inch o.d. rigid coaxial line was used to feed the test antenna, and a section of 1 5/8 inch o.d. rigid outer conductor only was attached above the test antenna. The lines were properly grounded during all tests.

The power distribution and phase relationship to the antenna elements was adjusted in order to achieve the directional radiation patterns for both horizontal and vertical polarization components.

The proof-of-performance was accomplished using a 48" face tower with identical dimension and configuration including all braces, ladders, conduits, coaxial lines and other appurtenances that are included in the actual aperture at which the antenna will be installed. The structure was erected vertically on a turntable mounted on a non-metallic building with the antenna centered vertically on the structure, making the center of radiation of the test approximately 30 feet above ground. The turntable is equipped with a motor drive and a US Digital angle position indicator. The resolution of this angle position indicator is one-hundredth of a degree.

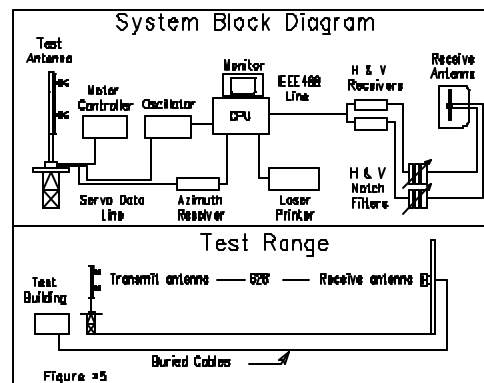

The antenna under test was operated in the transmitting mode and fed from a HP8657D signal generator calibrated. The frequency of the signal source was set at 89.9 MHz and was constantly monitored by a Rohde & Schwarz ESVD measuring receiver calibrated.

A broadband horizontal and vertical dipole system, located approximately 628 feet from the test antenna, was used to receive the emitted test signals. The dipole system was mounted at the same height above terrain as the center of the antenna under test.

# Directional Antenna System

## Proposed For

### KFLV, Wilber, Nebraska

(Continued)

The signals received by the dipole system were fed to the test building by way of two buried Helix cables to an Rohde & Schwarz measuring receiver. This data was interfaced to a Hewlett-Packard Laser Jet 4P printer by means of a Pentium computer system. Relative field strength was plotted as a function of azimuth.

The measurements were performed by rotating the test antenna in a counter-clockwise direction and plotting the received signal on polar coordinated graph paper in a clockwise direction. Both horizontal and vertical components were recorded separately.

## CONCLUSIONS

The circular polarized system consists of 2 full-wavelength spaced bays using one driven circular polarized radiating element, two horizontal parasitic elements placed one quarter wave above and below each bay and two vertical parasitic elements per bay. The power distribution and phase relationship will be fixed when antenna is manufactured. Proper maintenance of the elements should be all that is required to maintain the pattern in adjustment.

The LP-2E-DA array is to be mounted on the North 257 degrees East tower face of the 48" face tower at a bearing of North 257 degrees East. Blue prints provided with the antenna will show the proper antenna orientation alignment. The antenna alignment procedure should be directed by a licensed surveyor as prescribed by the FCC.

Figure #1 represents the maximum value of either the horizontal or vertical component at any azimuth. The measured horizontal plane relative field pattern, for both the horizontal and vertical polarization components, is shown on Figure #2 attached. The actual measured pattern does not exceed the authorized FCC composite pattern at any azimuth. A calculated vertical plane relative field pattern is shown on Figure #3 attached. The power in the maximum will reach 5.8 kilowatts (7.634 dBk).

The RMS of the vertically polarized horizontal plane component does not exceed the RMS of the horizontally polarized horizontal plane component.

Directional Antenna System  
Proposed For  
KFLV, Wilber, Nebraska

(Continued)

The composite horizontal and vertical maximum relative field pattern obtained from the measured data as shown on Figure #1 has an RMS that is greater than 85% of the filed composite pattern.

The clear vertical length of the structure required to support the antenna is 30 feet 10 in.

The directional antenna should not be mounted on the top of an antenna tower that includes a top-mounted platform larger than the cross-sectional area of the tower in the horizontal plane. No obstructions other than those that are specified by the blue prints supplied with the antenna are to be mounted within 75 ft. horizontally of the system. The vertical distance to the nearest obstruction should be a minimum of 10 ft. from the directional antenna. Metallic guy wires should be a minimum distance of forty feet horizontally from the antenna.

ELECTRONICS RESEARCH, INC.

A handwritten signature in black ink, appearing to read "Tom Schaefer". The signature is fluid and cursive, with a large initial "T" and "S".


The Microsoft Word document on file electronically at Electronic Research, Inc. governs the specifications, scope, and configuration of the product described. All other representations whether verbal, printed, or electronic are subordinate to the master copy of this document on file at ERI.

# **ERI**® *Horizontal Plane Relative Field Pattern*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

FIGURE NO: 1  
STATION: KFLV  
LOCATION: WILBUR, NE  
ANTENNA: LP-2E-DA  
STRUCTURE: 48" FACE

DATE: 5/1/2007  
FREQUENCY: 89.9 MHz  
ORIENTATION: 257° TRUE  
MOUNTING: CUSTOM  
BAYS TESTED: TWO

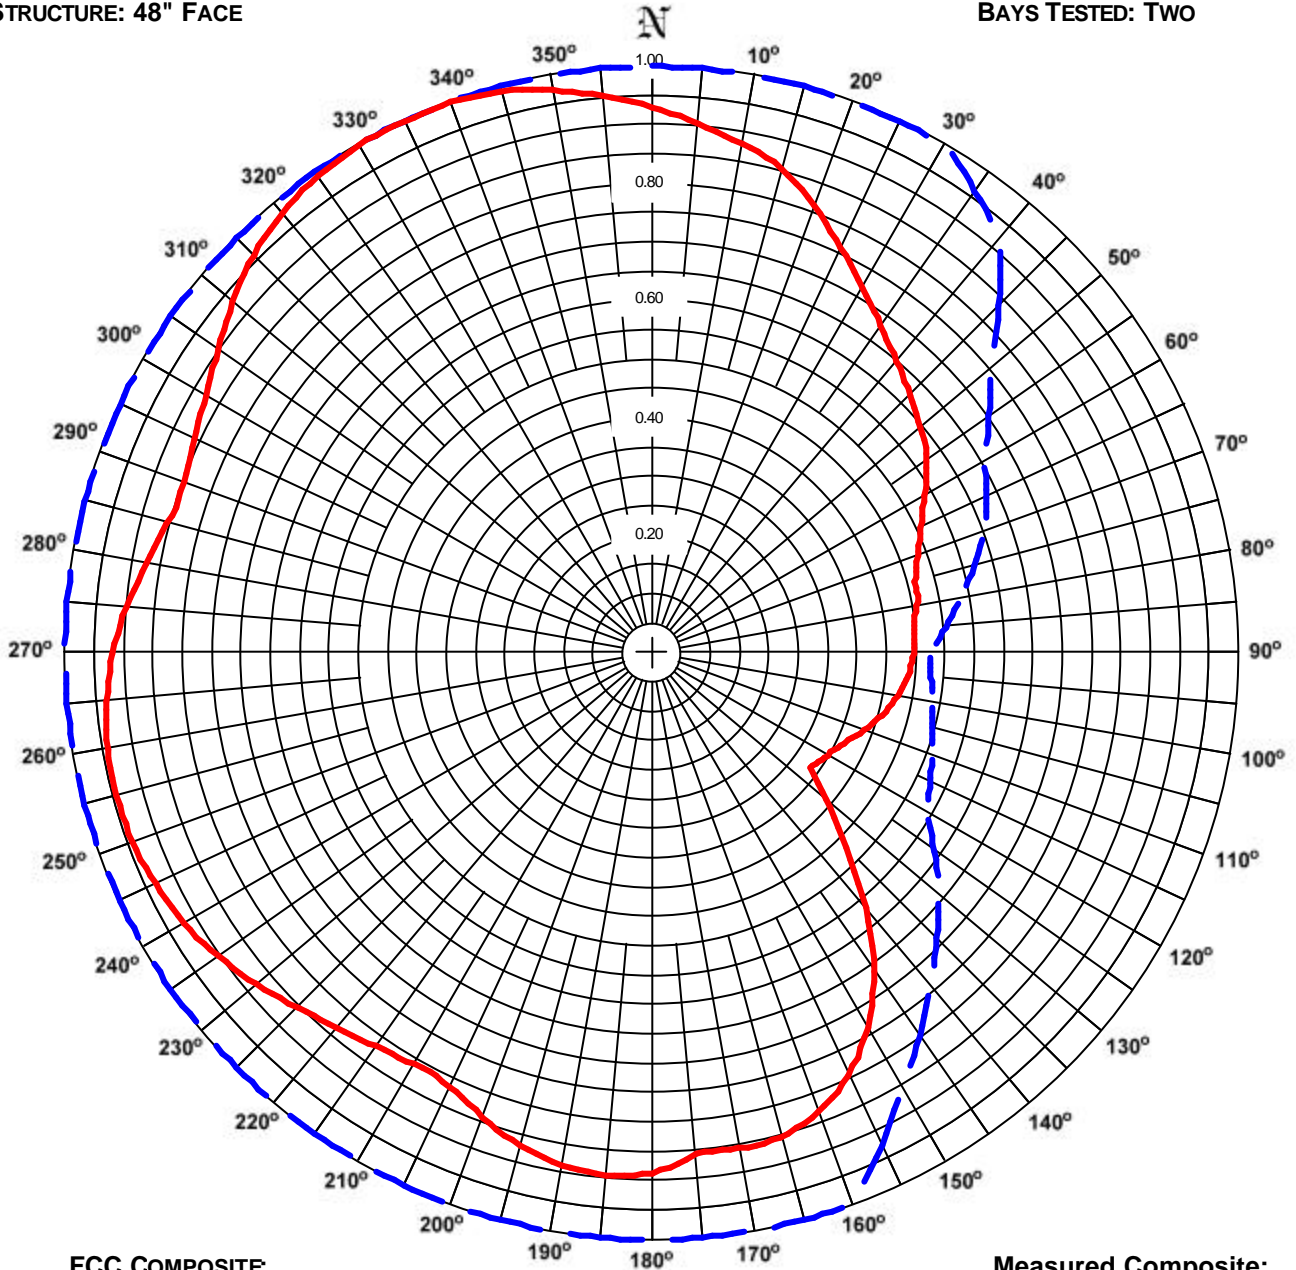

FCC COMPOSITE

RMS: 0.900  
MAXIMUM: 1.000 @ 0° TRUE  
MINIMUM: 0.473 @ 90° TRUE

Measured Composite:

RMS: 0.787  
Maximum: 1.000 @ 332° True  
Minimum: 0.335 @ 126° True

COMMENTS: COMPOSITE PATTERN: THIS PATTERN SHOWS THE MAXIMUM OF EITHER THE H OR V AZIMUTH VALUES. THIS PATTERN IS GREATER THAN 85% OF THE FCC FILED COMPOSITE PATTERN BPED-20050726APO.

# **ERI**® *Horizontal Plane Relative Field List*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

**Station: KFLV**  
**Location: Wilbur, NE**  
**Frequency: 89.9 MHz**

**Antenna: LP-2E-DA**  
**Orientation: 257° True**  
**Tower: 48" Face**

**Figure: 1**  
**Date: 5/1/2007**  
**Reference: kflv2m**

Angle	Envelope			Polarization	Angle	Envelope			Polarization
	Field	kW	dBk			Field	kW	dBk	
0°	0.931	5.03	7.02	Horizontal	180°	0.886	4.55	6.58	Horizontal
5°	0.905	4.75	6.77	Horizontal	185°	0.894	4.63	6.66	Horizontal
10°	0.882	4.51	6.55	Horizontal	190°	0.886	4.55	6.58	Horizontal
15°	0.854	4.23	6.27	Horizontal	195°	0.869	4.38	6.41	Horizontal
20°	0.810	3.81	5.80	Horizontal	200°	0.841	4.10	6.13	Horizontal
25°	0.763	3.38	5.28	Horizontal	205°	0.816	3.86	5.87	Horizontal
30°	0.720	3.00	4.78	Horizontal	210°	0.809	3.80	5.79	Vertical
35°	0.681	2.69	4.30	Horizontal	215°	0.819	3.89	5.90	Vertical
40°	0.650	2.45	3.89	Horizontal	220°	0.834	4.04	6.06	Vertical
45°	0.622	2.24	3.51	Horizontal	225°	0.854	4.23	6.26	Vertical
50°	0.598	2.07	3.17	Horizontal	230°	0.879	4.48	6.51	Vertical
55°	0.572	1.89	2.78	Horizontal	235°	0.902	4.72	6.74	Vertical
60°	0.537	1.67	2.24	Horizontal	240°	0.920	4.91	6.91	Vertical
65°	0.506	1.49	1.72	Horizontal	245°	0.933	5.05	7.03	Vertical
70°	0.482	1.35	1.30	Horizontal	250°	0.941	5.14	7.11	Vertical
75°	0.465	1.25	0.98	Horizontal	255°	0.944	5.17	7.13	Vertical
80°	0.459	1.22	0.88	Vertical	260°	0.941	5.13	7.10	Vertical
85°	0.450	1.17	0.69	Horizontal	265°	0.932	5.04	7.02	Vertical
90°	0.447	1.16	0.64	Horizontal	270°	0.918	4.89	6.89	Vertical
95°	0.439	1.12	0.48	Horizontal	275°	0.899	4.69	6.71	Vertical
100°	0.426	1.05	0.21	Horizontal	280°	0.875	4.44	6.48	Vertical
105°	0.407	0.96	-0.17	Horizontal	285°	0.855	4.24	6.27	Vertical
110°	0.384	0.86	-0.67	Horizontal	290°	0.849	4.18	6.22	Horizontal
115°	0.363	0.76	-1.17	Horizontal	295°	0.860	4.29	6.32	Horizontal
120°	0.347	0.70	-1.56	Horizontal	300°	0.878	4.47	6.50	Horizontal
125°	0.336	0.65	-1.85	Horizontal	305°	0.902	4.72	6.74	Horizontal
130°	0.388	0.87	-0.60	Vertical	310°	0.932	5.04	7.02	Horizontal
135°	0.470	1.28	1.07	Vertical	315°	0.959	5.33	7.27	Horizontal
140°	0.569	1.88	2.73	Vertical	320°	0.979	5.56	7.45	Horizontal
145°	0.661	2.54	4.04	Vertical	325°	0.992	5.71	7.57	Horizontal
150°	0.736	3.14	4.97	Vertical	330°	0.999	5.79	7.63	Horizontal
155°	0.793	3.65	5.62	Vertical	335°	0.999	5.79	7.63	Horizontal
160°	0.832	4.02	6.04	Vertical	340°	0.999	5.79	7.63	Vertical
165°	0.854	4.23	6.26	Vertical	345°	0.991	5.69	7.55	Vertical
170°	0.858	4.26	6.30	Vertical	350°	0.974	5.51	7.41	Vertical
175°	0.857	4.26	6.29	Horizontal	355°	0.953	5.27	7.22	Horizontal

<b>Polarization:</b>	<b>Envelope</b>
<b>Maximum Field:</b>	<b>1.000 @ 332° True</b>
<b>Minimum Field:</b>	<b>0.335 @ 126° True</b>
<b>RMS:</b>	<b>0.787</b>
<b>Maximum ERP:</b>	<b>5.800 kW</b>
<b>Maximum Power Gain:</b>	<b>1.637 (2.142 dB)</b>


**Total Input Power: 3.542 kW**

# **ERI**® *Horizontal Plane Relative Field Pattern*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

FIGURE NO: 2  
STATION: KFLV  
LOCATION: WILBUR, NE  
ANTENNA: LP-2E-DA  
STRUCTURE: 48" FACE

DATE: 5/1/2007  
FREQUENCY: 89.9 MHz  
ORIENTATION: 257° TRUE  
MOUNTING: CUSTOM  
BAYS TESTED: TWO

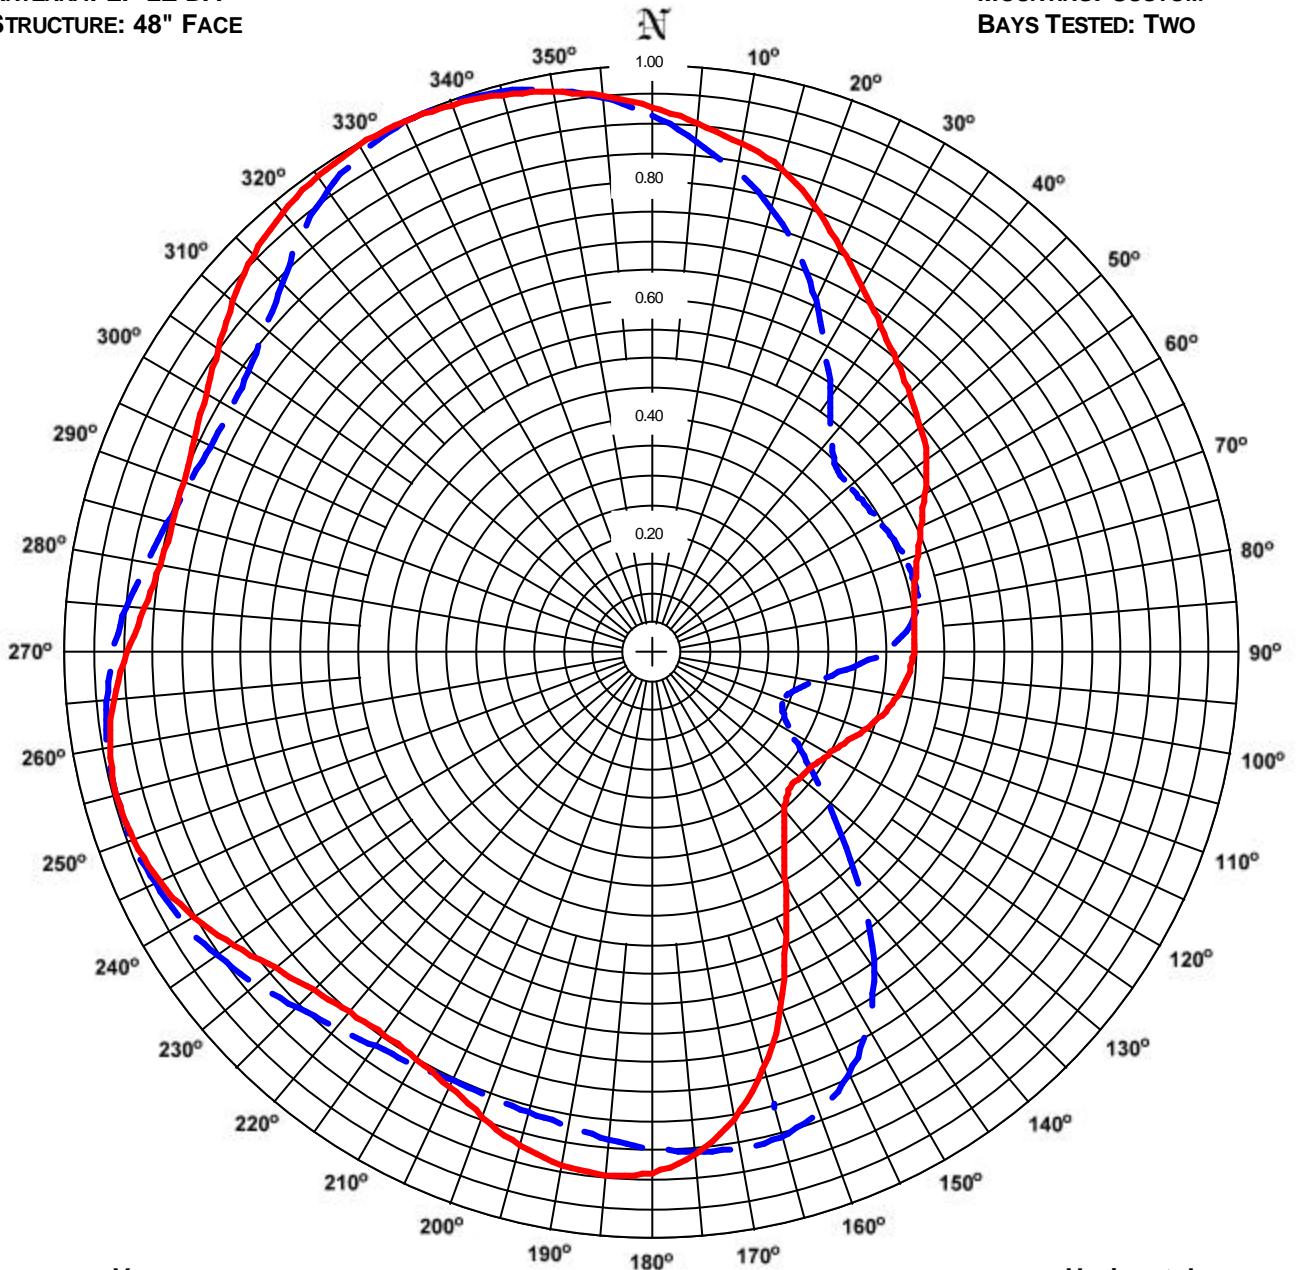

VERTICAL

RMS: 0.756  
MAXIMUM: 1.000 @ 338° TRUE  
MINIMUM: 0.238 @ 110° TRUE

Horizontal

RMS: 0.765  
Maximum: 1.000 @ 332° True  
Minimum: 0.328 @ 133° True

COMMENTS: MEASURED PATTERNS OF THE HORIZONTAL AND VERTICAL COMPONENTS

# ERI<sup>®</sup> *Horizontal Plane Relative Field List*

Electronics Research, Inc. 7777 Gardner Rd. Chandler, In 47610 Phone (812) 925-6000 Fax (812) 925-4030 <http://www.eriinc.com/>

**Station: KFLV**  
**Location: Wilbur, NE**  
**Frequency: 89.9 MHz**

**Antenna: LP-2E-DA**  
**Orientation: 257° True**  
**Tower: 48" Face**

**Figure: 2**  
**Date: 5/1/2007**  
**Reference: kflv2m**

Angle	Horizontal			Vertical			Angle	Horizontal			Vertical		
	Field	kW	dBk	Field	kW	dBk		Field	kW	dBk	Field	kW	dBk
0°	0.931	5.03	7.02	0.917	4.88	6.88	180°	0.886	4.55	6.58	0.845	4.14	6.17
5°	0.905	4.75	6.77	0.876	4.45	6.48	185°	0.894	4.63	6.66	0.832	4.02	6.04
10°	0.882	4.51	6.55	0.833	4.03	6.05	190°	0.886	4.55	6.58	0.819	3.89	5.90
15°	0.854	4.23	6.27	0.787	3.59	5.55	195°	0.869	4.38	6.41	0.810	3.80	5.80
20°	0.810	3.81	5.80	0.726	3.05	4.85	200°	0.841	4.10	6.13	0.805	3.75	5.75
25°	0.763	3.38	5.28	0.664	2.56	4.08	205°	0.816	3.86	5.87	0.804	3.75	5.74
30°	0.720	3.00	4.78	0.594	2.05	3.12	210°	0.800	3.71	5.70	0.809	3.80	5.79
35°	0.681	2.69	4.30	0.532	1.64	2.15	215°	0.794	3.66	5.63	0.819	3.89	5.90
40°	0.650	2.45	3.89	0.476	1.32	1.19	220°	0.800	3.71	5.69	0.834	4.04	6.06
45°	0.622	2.24	3.51	0.446	1.15	0.62	225°	0.814	3.84	5.84	0.854	4.23	6.26
50°	0.598	2.07	3.17	0.440	1.13	0.51	230°	0.837	4.06	6.09	0.879	4.48	6.51
55°	0.572	1.89	2.78	0.443	1.14	0.56	235°	0.869	4.38	6.41	0.902	4.72	6.74
60°	0.537	1.67	2.24	0.448	1.17	0.67	240°	0.901	4.70	6.72	0.920	4.91	6.91
65°	0.506	1.49	1.72	0.456	1.20	0.81	245°	0.924	4.95	6.94	0.933	5.05	7.03
70°	0.482	1.35	1.30	0.461	1.23	0.91	250°	0.938	5.10	7.08	0.941	5.14	7.11
75°	0.465	1.25	0.98	0.464	1.25	0.96	255°	0.943	5.16	7.12	0.944	5.17	7.13
80°	0.454	1.19	0.77	0.459	1.22	0.88	260°	0.937	5.09	7.07	0.941	5.13	7.10
85°	0.450	1.17	0.69	0.436	1.10	0.42	265°	0.921	4.92	6.92	0.932	5.04	7.02
90°	0.447	1.16	0.64	0.393	0.89	-0.48	270°	0.894	4.64	6.66	0.918	4.89	6.89
95°	0.439	1.12	0.48	0.332	0.64	-1.94	275°	0.868	4.37	6.40	0.899	4.69	6.71
100°	0.426	1.05	0.21	0.281	0.46	-3.39	280°	0.851	4.20	6.24	0.875	4.44	6.48
105°	0.407	0.96	-0.17	0.250	0.36	-4.42	285°	0.845	4.14	6.17	0.855	4.24	6.27
110°	0.384	0.86	-0.67	0.238	0.33	-4.83	290°	0.849	4.18	6.22	0.840	4.09	6.12
115°	0.363	0.76	-1.17	0.249	0.36	-4.45	295°	0.860	4.29	6.32	0.831	4.00	6.02
120°	0.347	0.70	-1.56	0.277	0.45	-3.51	300°	0.878	4.47	6.50	0.829	3.98	6.00
125°	0.336	0.65	-1.85	0.324	0.61	-2.17	305°	0.902	4.72	6.74	0.839	4.08	6.11
130°	0.330	0.63	-2.00	0.388	0.87	-0.60	310°	0.932	5.04	7.02	0.859	4.28	6.32
135°	0.331	0.64	-1.97	0.470	1.28	1.07	315°	0.959	5.33	7.27	0.890	4.60	6.62
140°	0.352	0.72	-1.44	0.569	1.88	2.73	320°	0.979	5.56	7.45	0.930	5.01	7.00
145°	0.394	0.90	-0.46	0.661	2.54	4.04	325°	0.992	5.71	7.57	0.963	5.37	7.30
150°	0.457	1.21	0.82	0.736	3.14	4.97	330°	0.999	5.79	7.63	0.985	5.63	7.50
155°	0.540	1.69	2.29	0.793	3.65	5.62	335°	0.999	5.79	7.63	0.998	5.77	7.61
160°	0.643	2.40	3.80	0.832	4.02	6.04	340°	0.994	5.73	7.58	0.999	5.79	7.63
165°	0.735	3.14	4.96	0.854	4.23	6.26	345°	0.985	5.62	7.50	0.991	5.69	7.55
170°	0.806	3.77	5.77	0.858	4.26	6.30	350°	0.971	5.47	7.38	0.974	5.51	7.41
175°	0.857	4.26	6.29	0.853	4.22	6.26	355°	0.953	5.27	7.22	0.950	5.23	7.19

<b>Polarization:</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>Maximum Field:</b>	<b>1.000 @ 332° True</b>	<b>1.000 @ 338° True</b>
<b>Minimum Field:</b>	<b>0.328 @ 133° True</b>	<b>0.238 @ 110° True</b>
<b>RMS:</b>	<b>0.765</b>	<b>0.756</b>
<b>Maximum ERP:</b>	<b>5.800 kW</b>	<b>5.800 kW</b>
<b>Maximum Power Gain:</b>	<b>1.637 (2.142 dB)</b>	<b>1.637 (2.142 dB)</b>

**Total Input Power: 3.542 kW**




## ***Vertical Plane Relative Field Pattern***

***KFLV, Wilbur, NE, 89.9 MHz***

**Figure#: 3**

**Date: 5/1/2007**

***A 2 level, 1 wave-length spaced LP-2E-DA directional antenna  
with 0° beam tilt, 0% null fill and a H/V maximum power ratio of 1.000***

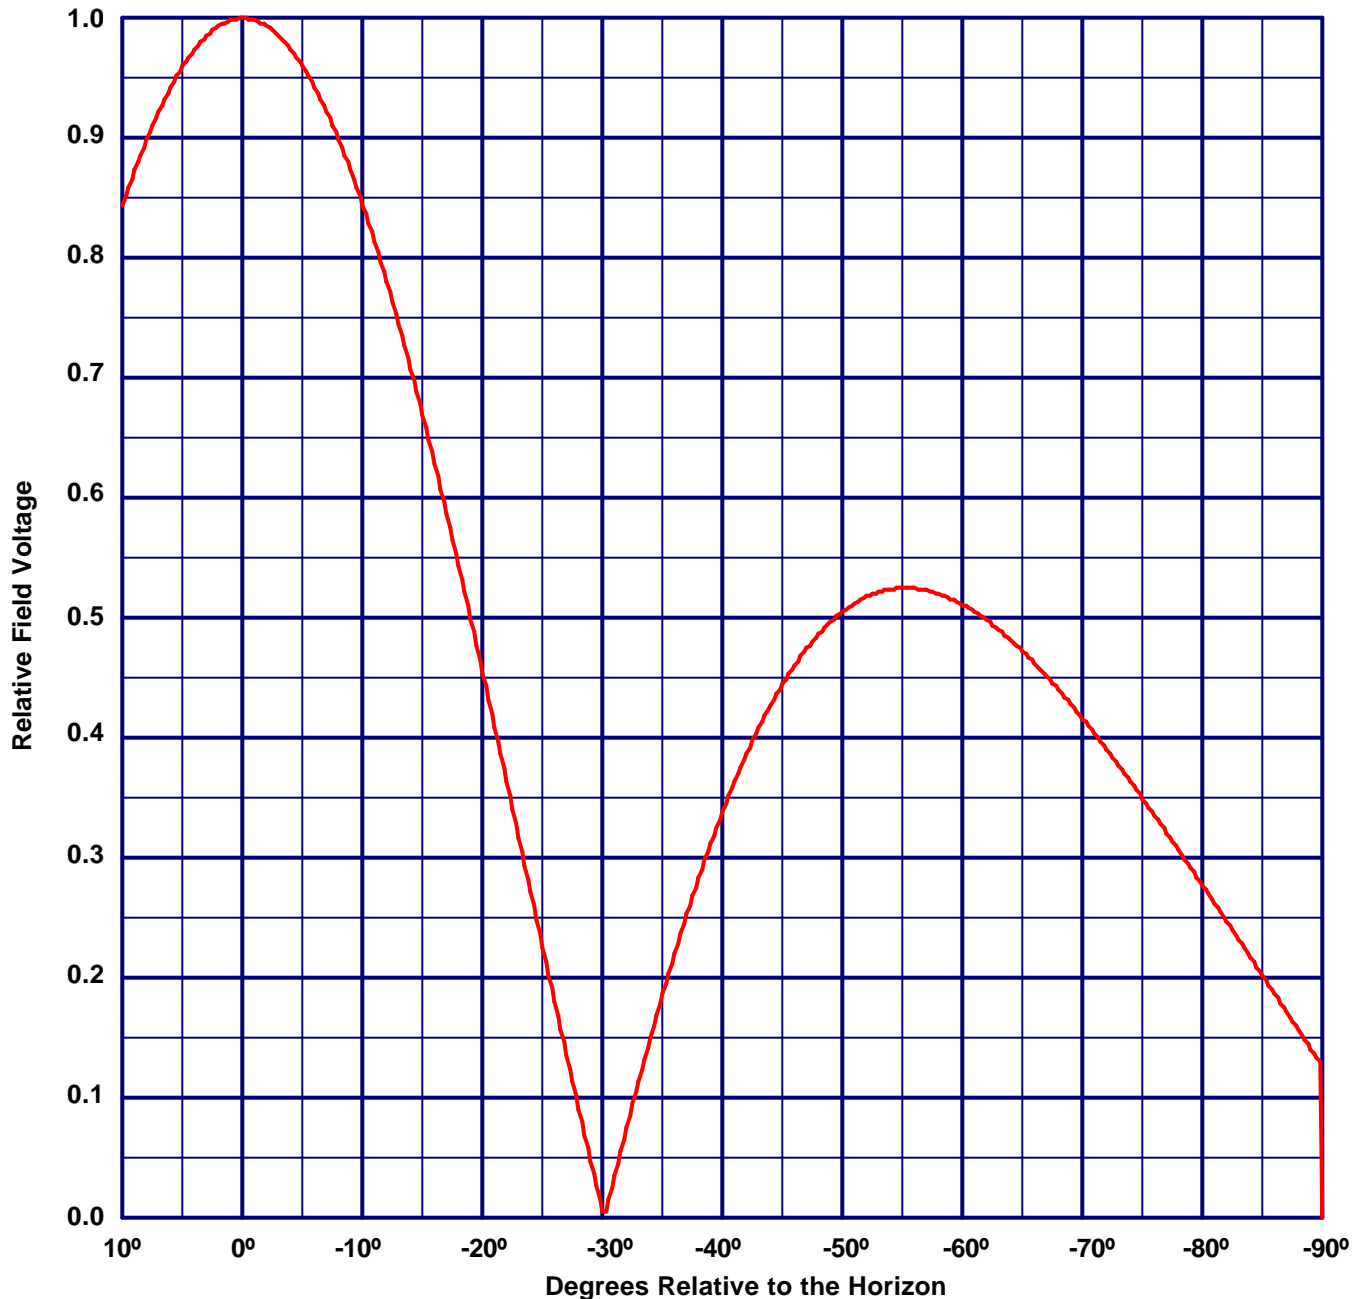

**Vertical Polarization Gain:**

**Maximum: 1.637 (2.142 dB)**

**Horizontal Plane: 1.637 (2.142 dB)**

**Horizontal Polarization Gain:**

**Maximum: 1.637 (2.142 dB)**

**Horizontal Plane: 1.637 (2.142 dB)**

# Directional Antenna System for KFLV, Wilber, Nebraska

(Continued)

## ANTENNA SPECIFICATIONS

Antenna Type:	LP-2E-DA
Frequency:	89.9 MHZ
Number of Bays:	two

## MECHANICAL SPECIFICATIONS

Mounting:	Custom
System length:	19 ft 7 in
Aperture length required:	30 ft 10 in
Orientation:	257° true

Input flange to the antenna 1 5/8" female.

## ELECTRICAL SPECIFICATIONS (For directional use)

Maximum horizontal ERP:	5.8 kW (7.634 dBk)
Horizontal maximum power gain:	1.637 (2.142 dB)
Maximum vertical ERP:	5.8 kW (7.634 dBk)
Vertical maximum power gain:	1.637 (2.142 dB)
Total input power:	3.542 kW (5.492 dBk)

