

Exhibit B-17
KTOR-FM 259A Westwood, California
NIER Analysis

Facilities Proposed

The proposed operation will be on Channel 259A (99.7 MHz) with an effective radiated power of 90 Watts. Operation is proposed with a 1-element circularly-polarized omni-directional antenna. The antenna will be side-mounted on an existing wooden pole located atop Dyer Mountain. The antenna support structure will not exceed 60.96 meters (200 feet) above ground and does not require notification to the Federal Aviation Administration. Therefore, this structure does not require an Antenna Structure Registration Number.

NIER Calculations

OET Bulletin 65 Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields (Edition 97-01) states in part that:

When performing an evaluation for compliance with the FCC's RF guidelines all significant contributors to the ambient RF environment should be considered. . .For purposes of such consideration, significance can be taken to mean any transmitter producing more than 5% of the applicable exposure limit (in terms of power density or the square of the electric or magnetic field strength) at accessible locations.

As will be demonstrated below, the proposed operation of KTOR will produce less than 5% of the applicable exposure limit for controlled environments. Thus, the proposed facility is categorically excluded from the requirement of further study. Therefore, pursuant to §1.1307(b)(3) of the Commission's Rules no calculations are required for the other FM and

TV facilities in the vicinity, and precise calculations are made only with regard to the levels from this proposal.

The power density calculations shown below were made using the techniques outlined in the EPA report titled: *An Engineering Assessment of the Potential Impact of Federal Radiation Protection Guidance on the AM, FM, and TV Broadcast Services* (Gailey & Tell, April, 1985). All calculations contained herein are based on the measured element patterns for the antenna, and follow the procedure shown in the Gailey and Tell report. The patterns were identified by applying the procedure outlined in the report to the measurement data contained in the report titled: *Element Pattern Measurements on FM Antennas* (EPA-520/ 6-85-107, June 1985).

"Ground level" calculations in this report have been made at a reference height of 2 meters above ground to provide a worst-case estimate of exposure for persons standing on the ground in the vicinity of the tower. Equation #1, contained in the Gailey & Tell report and shown below, was used to calculate the ground level power density figures from each FM antenna at incremental distances from the base of its supporting tower.

$$S(\text{mW} / \text{cm}^2) = \frac{33.40981 \times \text{AdjERP}(\text{Watts})}{D^2}$$

Where: *AdjERP(Watts)* is the maximum lobe effective radiated power times the element pattern factor times the array pattern factor.

D is the distance in meters from the center of radiation to the calculation point.

Hatfield & Dawson Consulting Engineers

Calculations of the power density produced by the KTOR antenna system assume a Type 2 element pattern, which is the appropriate element pattern for the SWR “double V” antenna to be used by KTOR. Ground level power densities have been calculated for locations extending from the base of the tower to a distance of 1000 meters. Values past this point are increasingly negligible.


The highest calculated ground level power density from KTOR occurs at a distance of 12 meters from the base of the antenna support structure. At this point the power density is calculated to be 11.5 FW/cm², 1.2% of 1000 FW/cm² (the FCC standard for controlled environments such as this one).

These calculations show that the maximum calculated power density produced at two meters above ground level by the proposed operation of KTOR alone is less than 5% of the applicable FCC exposure limit at all locations between 1 and 1000 meters from the base of the antenna support structure. Section 1.1307(b)(3) of the Commission's Rules excludes applications for new facilities or modifications to existing facilities from the requirement of preparing an environmental assessment when the calculated emissions from the applicants proposed facility are predicted to be less than 5% of the applicable FCC exposure limit. Therefore, the proposed facility is in compliance with Section 1.1301 et seq and no further analysis of non-ionizing radiation at this site is required in this application.

The Dyer Mountain transmitter site is located on a peak at the end of a rugged unimproved access road. Public access to the site is restricted and the antenna support structure will be posted with warning signs. Pursuant to OST Bulletin No. 65, all station personnel and contractors are required to follow appropriate safety procedures before any work is commenced on the antenna tower, including reduction in power or discontinuance of operation before any maintenance work is undertaken.

The permittee/licensee in coordination with other users of the site must reduce power or cease operation as necessary to protect persons having access to the site, tower or antenna from radiofrequency radiation in excess of FCC guidelines.

Power Density vs Distance

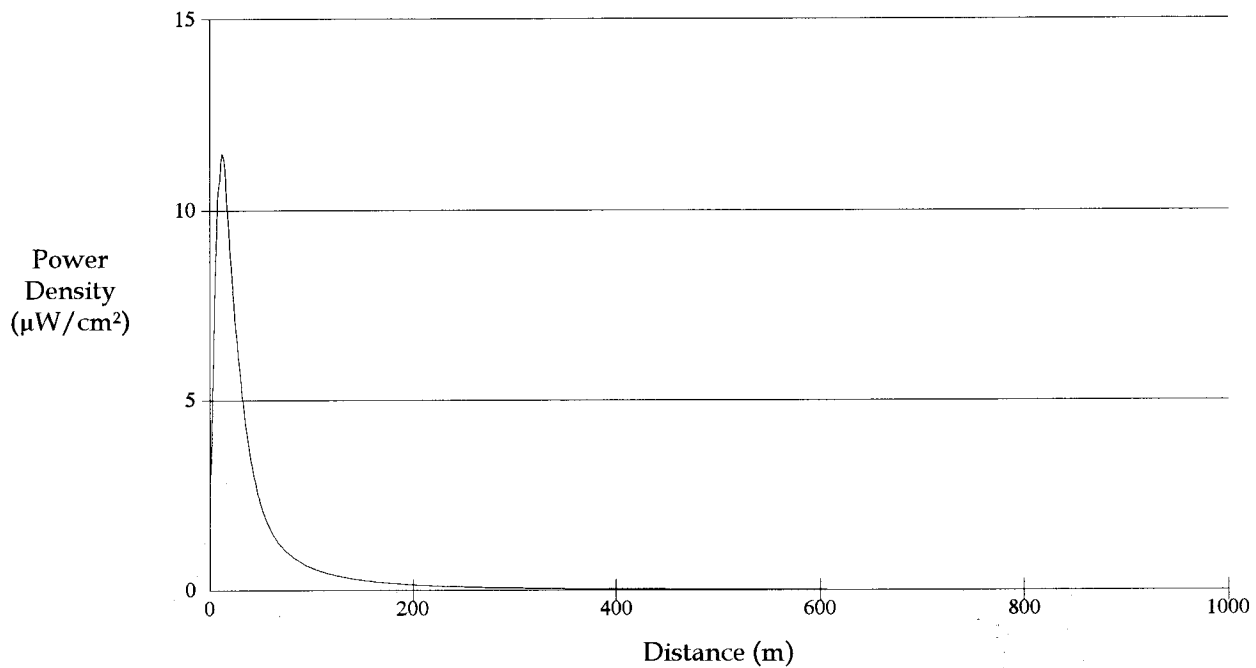

Ground-Level NIER Analysis

OET FMModel

KTOR-FM Westwood, CA

Antenna Type: SWR "double V"

Number of Elements: 1

Element Spacing: 1.0 wavelength

Distance: 1000 meters

Horizontal ERP: 90 Watts

Vertical ERP: 90 Watts

Antenna Height: 14 meters AGL

Maximum Power Density is 11.5 $\mu\text{W}/\text{cm}^2$ at 12 meters from the antenna structure.

Hatfield & Dawson Consulting Engineers