

Non-Interference Compliance

Regarding Facility id 153244

Channel 229

Description of Exhibit 13 Contents

This exhibit demonstrates that the proposed facility complies with contour overlap and interference protection provisions in all of the applicable rule sections and that this application for a construction permit is in full compliance with 47 C.F.R. § 74.1204.

Let it be noted that should any actual real world interference occur, the applicant acknowledges that it will promptly suspend operation of this translator in accordance with 47 C.F.R. § 74.1203.

Page 2 of this exhibit is an explanation of the method used to demonstrate compliance with contour overlap and interference provisions based on 47 C.F.R. § 74.1204(d), which states:

[A]n application otherwise precluded by this section will be accepted if it can be demonstrated that no actual interference will occur due to intervening terrain, lack of population or such other factors as may be applicable.

Page 3 contains a tabulation of the vertical radiation pattern of the proposed antenna and the minimum ground clearance of the interfering contour based on this pattern.

Pages 4 through 5 include a tabulation of the vertical radiation pattern for the proposed antenna provided by the antenna manufacturer.

Page 6 of this exhibit contains the tabulated data from the interference analysis, which shows all stations whose protected contours come within 50 km of the 34 dBμ F(50,10) contour of the proposed translator. These tabulated values were calculated using data from the FCC's CDBS files and 30 arc second terrain data. The column labeled "Adj" shows the number of channels difference between the entry and the proposed translator. The column labeled "Dist" shows the distance in km. The column labeled "Overlap" shows the area of contour overlap in square kilometers.

Page 7 of this exhibit is a portion of a USGS 1:24,000 scale 7.5 minute quadrangle at full scale with the calculated area of interference overlaid. The sheet includes the quadrangle name and measurement scale at the bottom-left corner (note: "Mt" refers to meters). The area of interference was calculated using the free space equation and 120 radials.

Page 8 of this exhibit is an aerial photo of the vicinity surrounding the proposed translator's tower site.

Compliance with 47 C.F.R. § 74.1204(d)

All authorized second and third adjacent stations with which the proposed translator has contour overlap are tabulated below. Column four show the station's signal level at the proposed translator's tower site, and column five gives the minimum value within the entire standard interfering contour of the proposed translator (100 dBμ for most classes, 94 for class B, 97 for class B1). The minimum second or third adjacent F(50,50) contour within the proposed translator's standard interfering contour was used to calculate the proposed translator's actual "worst-case" interfering contour.

Application_id	File Number	Callsign	Contour at Tower	Min. Contour
252194	BLH19970815KB	KMKT	61.1	61.1
Minimum F(50,50) Contour of Adjacent Station within Proposed Translator's Standard Interfering Contour				61.1

FCC 02-244 at Section II.A.5 states that "when demonstrating that 'no actual interference will occur due to . . . other factors,' pursuant to Section 74.1204(d), an applicant may use the undesired-to-desired signal ratio method." The undesired-to-desired ratio for second and third adjacent stations required by § 74.1204(a) is 40 dB. Since the minimum protected contour strength within the proposed translator's standard interference contour is **61.1 dBμ**, this makes the proposed translator's worst-case interfering contour **101.1 dBμ**. By the free-space equation, this contour is calculated to extend a maximum of **365.6 m** from the transmit antenna.


The maximum horizontal plane of the interfering contour was calculated for 120 radials and plotted on the pertinent portion of a USGS quadrangle (page 7 of this exhibit). However, the field strength of the proposed translator's antenna varies with angle of depression from horizontal. The antenna relative fields are tabulated on the following page at 5 degree increments, starting at 5 degrees below horizontal. Antenna relative field strength data was provided and certified by the manufacturer of the proposed antenna. Using a free-space calculation that neglects any loss due to reflection, the vertical ground clearance of the proposed translator's interference contour has been tabulated. As shown on the following page, the area of interference clears the tower ground level (TGL) by **18.8 m** at the lowest point. The applicant has taken into account USGS quadrangles and relevant aerial photography in stating that no structures, except possibly tower support structures, puncture the area of interference. Hence, in accordance with 47 C.F.R. § 74.1204(d) and the clarification provided by the FCC in the decision *Re: Living Way Ministries* (FCC 02-244), a lack of population has been demonstrated within the area of interference and this application is therefore in full compliance with 47 C.F.R. § 74.1204.

Antenna Manufacturer:	PSI
Antenna Model:	FML-3(.75)
CORAGL:	78 m
Maximum ERP:	0.035 kW
Interfering Contour:	101.1 dBμ
Max Int. Contour Distance:	365.6 m
Min Ground Clearance:	18.8 m

Depression Angle Below Horizontal	Antenna Relative Field	ERP (watts)	Distance to Interfering Contour from Antenna (m)	Horizontal Distance of Interfering Contour from Tower (m)	Vertical Clearance of Interfering Contour above TGL (m)
5	.941	31.0	344.1	342.7	48.0
10	.777	21.1	284.1	279.8	28.7
15	.543	10.3	198.5	191.8	26.6
20	.287	2.9	104.9	98.6	42.1
25	.055	0.1	20.1	18.2	69.5
30	.120	0.5	43.9	38.0	56.1
35	.222	1.7	81.2	66.5	31.4
40	.252	2.2	92.1	70.6	18.8
45	.227	1.8	83.0	58.7	19.3
50	.168	1.0	61.4	39.5	30.9
55	.096	0.3	35.1	20.1	49.2
60	.030	0.0	11.0	5.5	68.5
65	.021	0.0	7.7	3.2	71.0
70	.050	0.1	18.3	6.3	60.8
75	.059	0.1	21.6	5.6	57.2
80	.050	0.1	18.3	3.2	60.0
85	.028	0.0	10.2	0.9	67.8
90	.001	0.0	0.4	0.0	77.6
Minimum Clearance above TGL:					18.8 m



Relative Field Elevation Pattern
Model: PSIFML-3
Type: 3-Bay Low Power FM
Polarization: Circular
Configuration: 3/4-wave spaced
Gain: 1.4 (1.46 dB)

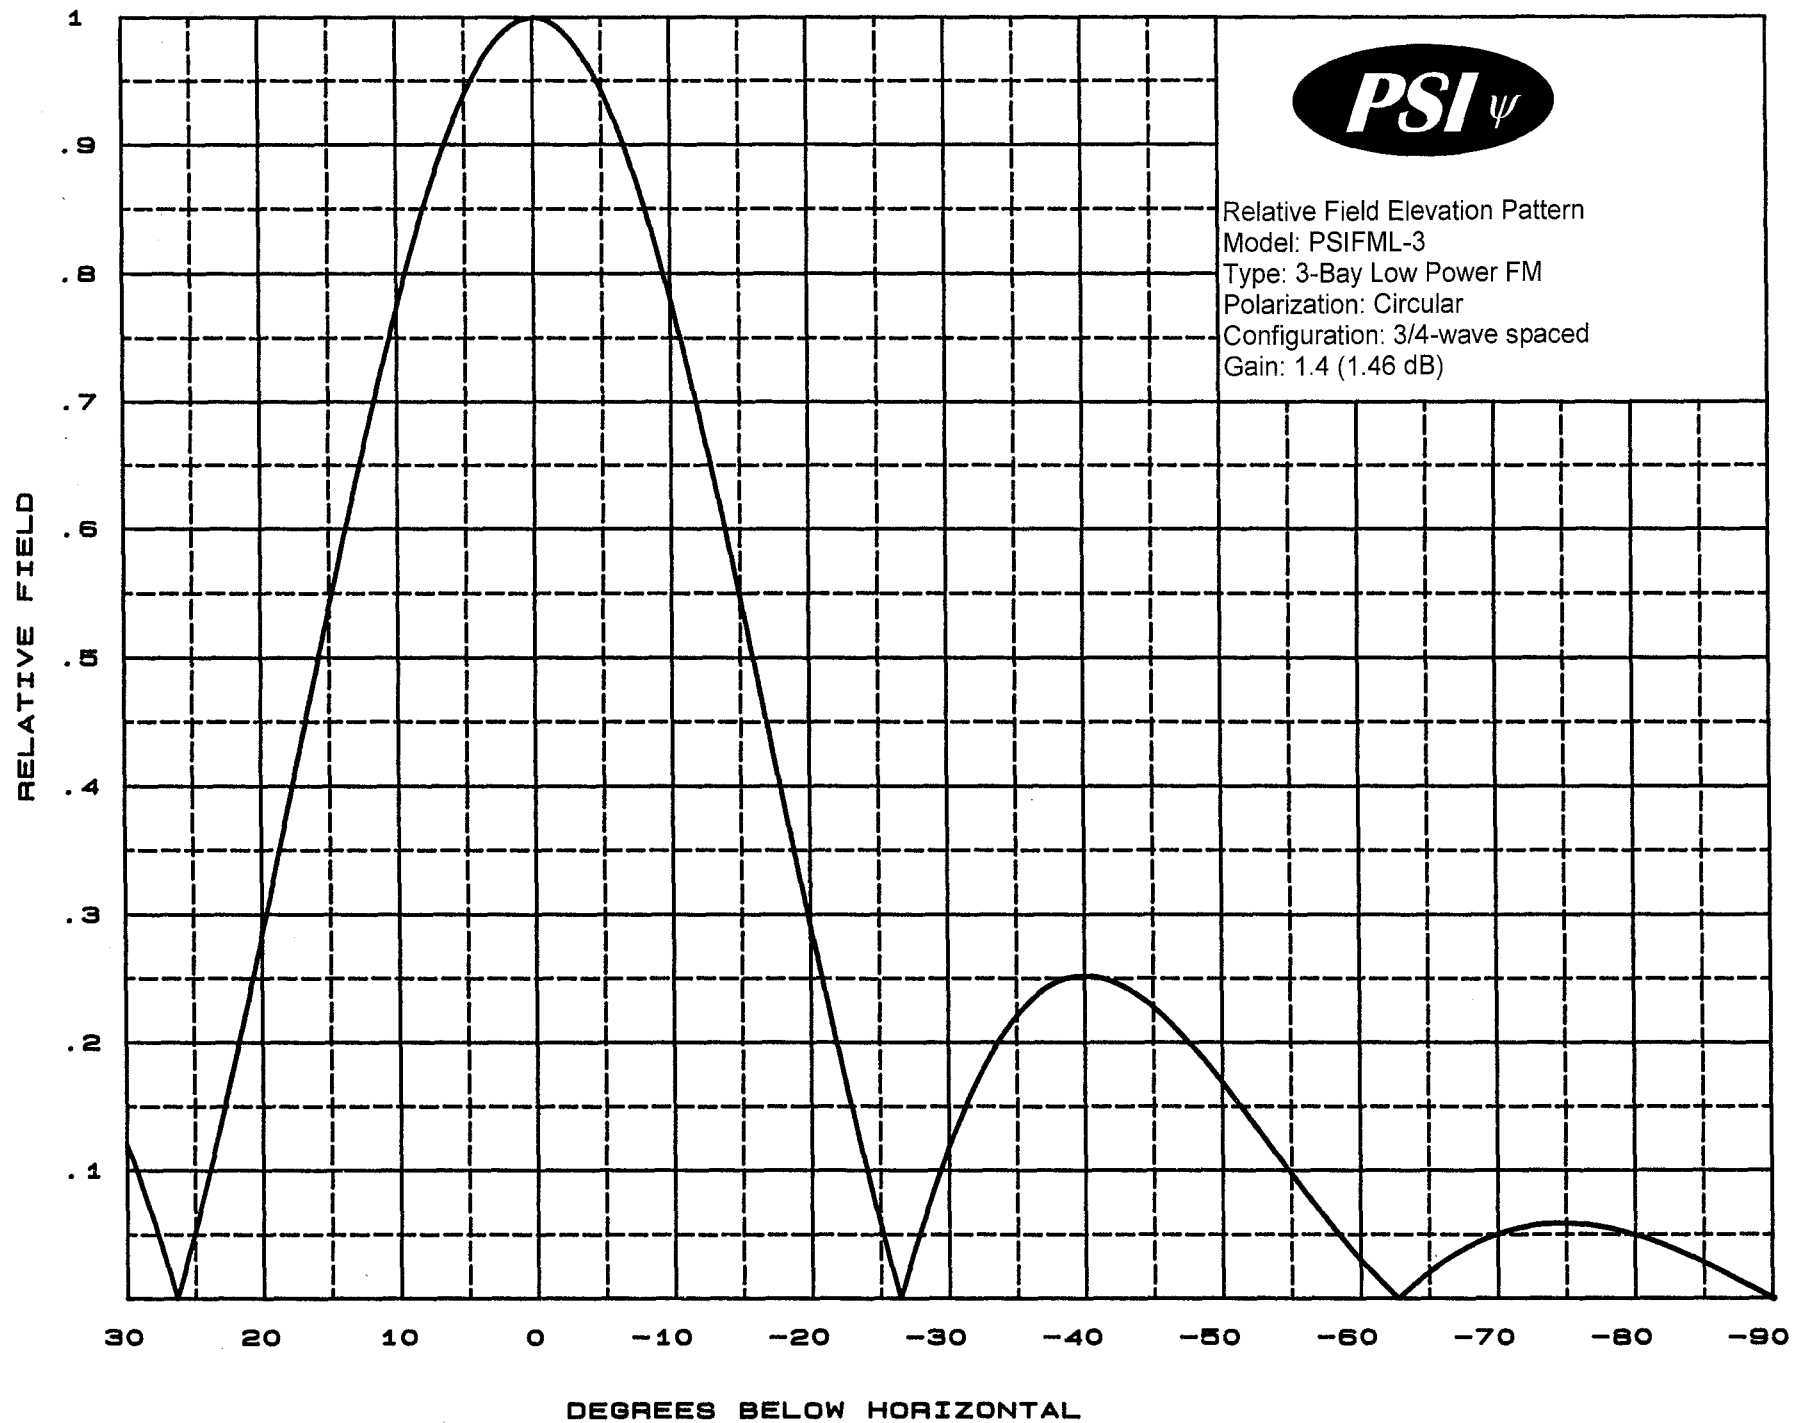



Propagation Systems Inc.
 Elevation Pattern Tabulation
 Antenna: PSIFML-3 Special
 Bay spacing: 3/4 wave

Angle	Field	dB	Angle	Field	dB	Angle	Field	dB
-90.0	0.001	-60.000	-50.0	0.168	-15.500	-10.0	0.777	-2.194
-89.0	0.006	-44.795	-49.0	0.181	-14.829	-9.0	0.817	-1.761
-88.0	0.012	-38.775	-48.0	0.194	-14.240	-8.0	0.853	-1.379
-87.0	0.017	-35.329	-47.0	0.206	-13.714	-7.0	0.886	-1.049
-86.0	0.023	-32.869	-46.0	0.217	-13.266	-6.0	0.916	-0.766
-85.0	0.028	-31.047	-45.0	0.227	-12.881	-5.0	0.941	-0.529
-84.0	0.033	-29.622	-44.0	0.235	-12.562	-4.0	0.962	-0.338
-83.0	0.038	-28.467	-43.0	0.242	-12.308	-3.0	0.978	-0.190
-82.0	0.042	-27.510	-42.0	0.248	-12.126	-2.0	0.990	-0.085
-81.0	0.046	-26.705	-41.0	0.251	-12.010	-1.0	0.998	-0.021
-80.0	0.050	-26.073	-40.0	0.252	-11.968	0.0	1.000	0.000
-79.0	0.053	-25.559	-39.0	0.251	-12.004	1.0	0.998	-0.021
-78.0	0.055	-25.169	-38.0	0.248	-12.126	2.0	0.990	-0.085
-77.0	0.057	-24.887	-37.0	0.242	-12.336	3.0	0.978	-0.190
-76.0	0.058	-24.682	-36.0	0.233	-12.657	4.0	0.962	-0.338
-75.0	0.059	-24.614	-35.0	0.222	-13.092	5.0	0.941	-0.529
-74.0	0.059	-24.637	-34.0	0.207	-13.676	6.0	0.916	-0.766
-73.0	0.058	-24.772	-33.0	0.190	-14.432	7.0	0.886	-1.049
-72.0	0.056	-25.027	-32.0	0.170	-15.414	8.0	0.853	-1.379
-71.0	0.054	-25.411	-31.0	0.146	-16.700	9.0	0.817	-1.759
-70.0	0.050	-25.968	-30.0	0.120	-18.427	10.0	0.777	-2.194
-69.0	0.046	-26.733	-29.0	0.090	-20.871	11.0	0.734	-2.683
-68.0	0.041	-27.731	-28.0	0.058	-24.704	12.0	0.689	-3.233
-67.0	0.035	-29.081	-27.0	0.023	-32.754	13.0	0.642	-3.848
-66.0	0.028	-30.954	-26.0	0.015	-36.745	14.0	0.593	-4.534
-65.0	0.021	-33.656	-25.0	0.055	-25.217	15.0	0.543	-5.301
-64.0	0.012	-38.221	-24.0	0.098	-20.213	16.0	0.492	-6.156
-63.0	0.003	-50.816	-23.0	0.142	-16.928	17.0	0.441	-7.116
-62.0	0.007	-42.949	-22.0	0.189	-14.460	18.0	0.389	-8.196
-61.0	0.018	-34.880	-21.0	0.238	-12.484	19.0	0.338	-9.425
-60.0	0.030	-30.546	-20.0	0.287	-10.839	20.0	0.287	-10.834
-59.0	0.042	-27.541	-19.0	0.338	-9.425	21.0	0.238	-12.484
-58.0	0.055	-25.217	-18.0	0.389	-8.199	22.0	0.189	-14.460
-57.0	0.068	-23.307	-17.0	0.441	-7.116	23.0	0.143	-16.919
-56.0	0.082	-21.711	-16.0	0.492	-6.159	24.0	0.098	-20.200
-55.0	0.096	-20.335	-15.0	0.543	-5.301	25.0	0.055	-25.193
-54.0	0.111	-19.124	-14.0	0.593	-4.536	26.0	0.015	-36.745
-53.0	0.125	-18.051	-13.0	0.642	-3.850	27.0	0.023	-32.754
-52.0	0.140	-17.106	-12.0	0.689	-3.234	28.0	0.058	-24.704
-51.0	0.154	-16.253	-11.0	0.734	-2.683	29.0	0.090	-20.871
						30.0	0.120	-18.438

file: FML 3-bay elevation tabulation


revision: A


Date: 1/28/08

Adjacent Channel Study
For Station NEW, Facility_id: 153244

Co-channel through third adjacent:

App_id	Fac_id	File_Number	Call	Licensee	Class	City	State	Status	ERP	RCAMSL	Chan	Adj	Dist	Overlap
252194	77588	BLH-19970815KB	KMKT	NM LICENSING LLC	C3	BELLS	TX	LIC	6.8	379	226	3	38.4	0.5409
1546468	141592	BNPFT-20130327AEO	K230BF	THE UNIVERSITY OF OKLAHOMA	D	ADA	OK	CP	0.115	409	230	1	84.5	0
119556	7992	BLH-19881018KA	KOYN	EAST TEXAS BROADCASTING, INC.	C2	PARIS	TX	LIC	50	289	230	1	91.8	0
560857	21597	BLH-20010417AAB	KIKT	HUNT COUNTY RADIO, LLC	A	GREENVILLE	TX	LIC	1.8	269	228	1	100.9	0
1545016	183382	BMPH-20130311ACI	KSTQ	K95.5 INC	A	STUART	OK	CP MOD	0.9	336	228	1	101.3	0
1390444	36289	BLH-20100719AFA	KNOR	LIBERMAN BROADCASTING OF DALLAS LICENSE	C0	KRUM	TX	LIC	43	881.1	229	0	109.8	0
1531414	21597	BPH-20121126ABU	KIKT	HUNT COUNTY RADIO, LLC	C3	COOPER	TX	CP	12.5	270	228	1	113.5	0
1509255	190388	BNPH-20120529AJN	NEW	SOUTHEASTERN OKLAHOMA RADIO , LLC	C3	HARTSHORNE	OK	CP	25	300	232	3	121	0
1409222	41380	BMLH-20101015ACJ	KLNO	UNIVISION RADIO LICENSE CORPORATION	C	FORT WORTH	TX	LIC	98	674	231	2	168.6	0

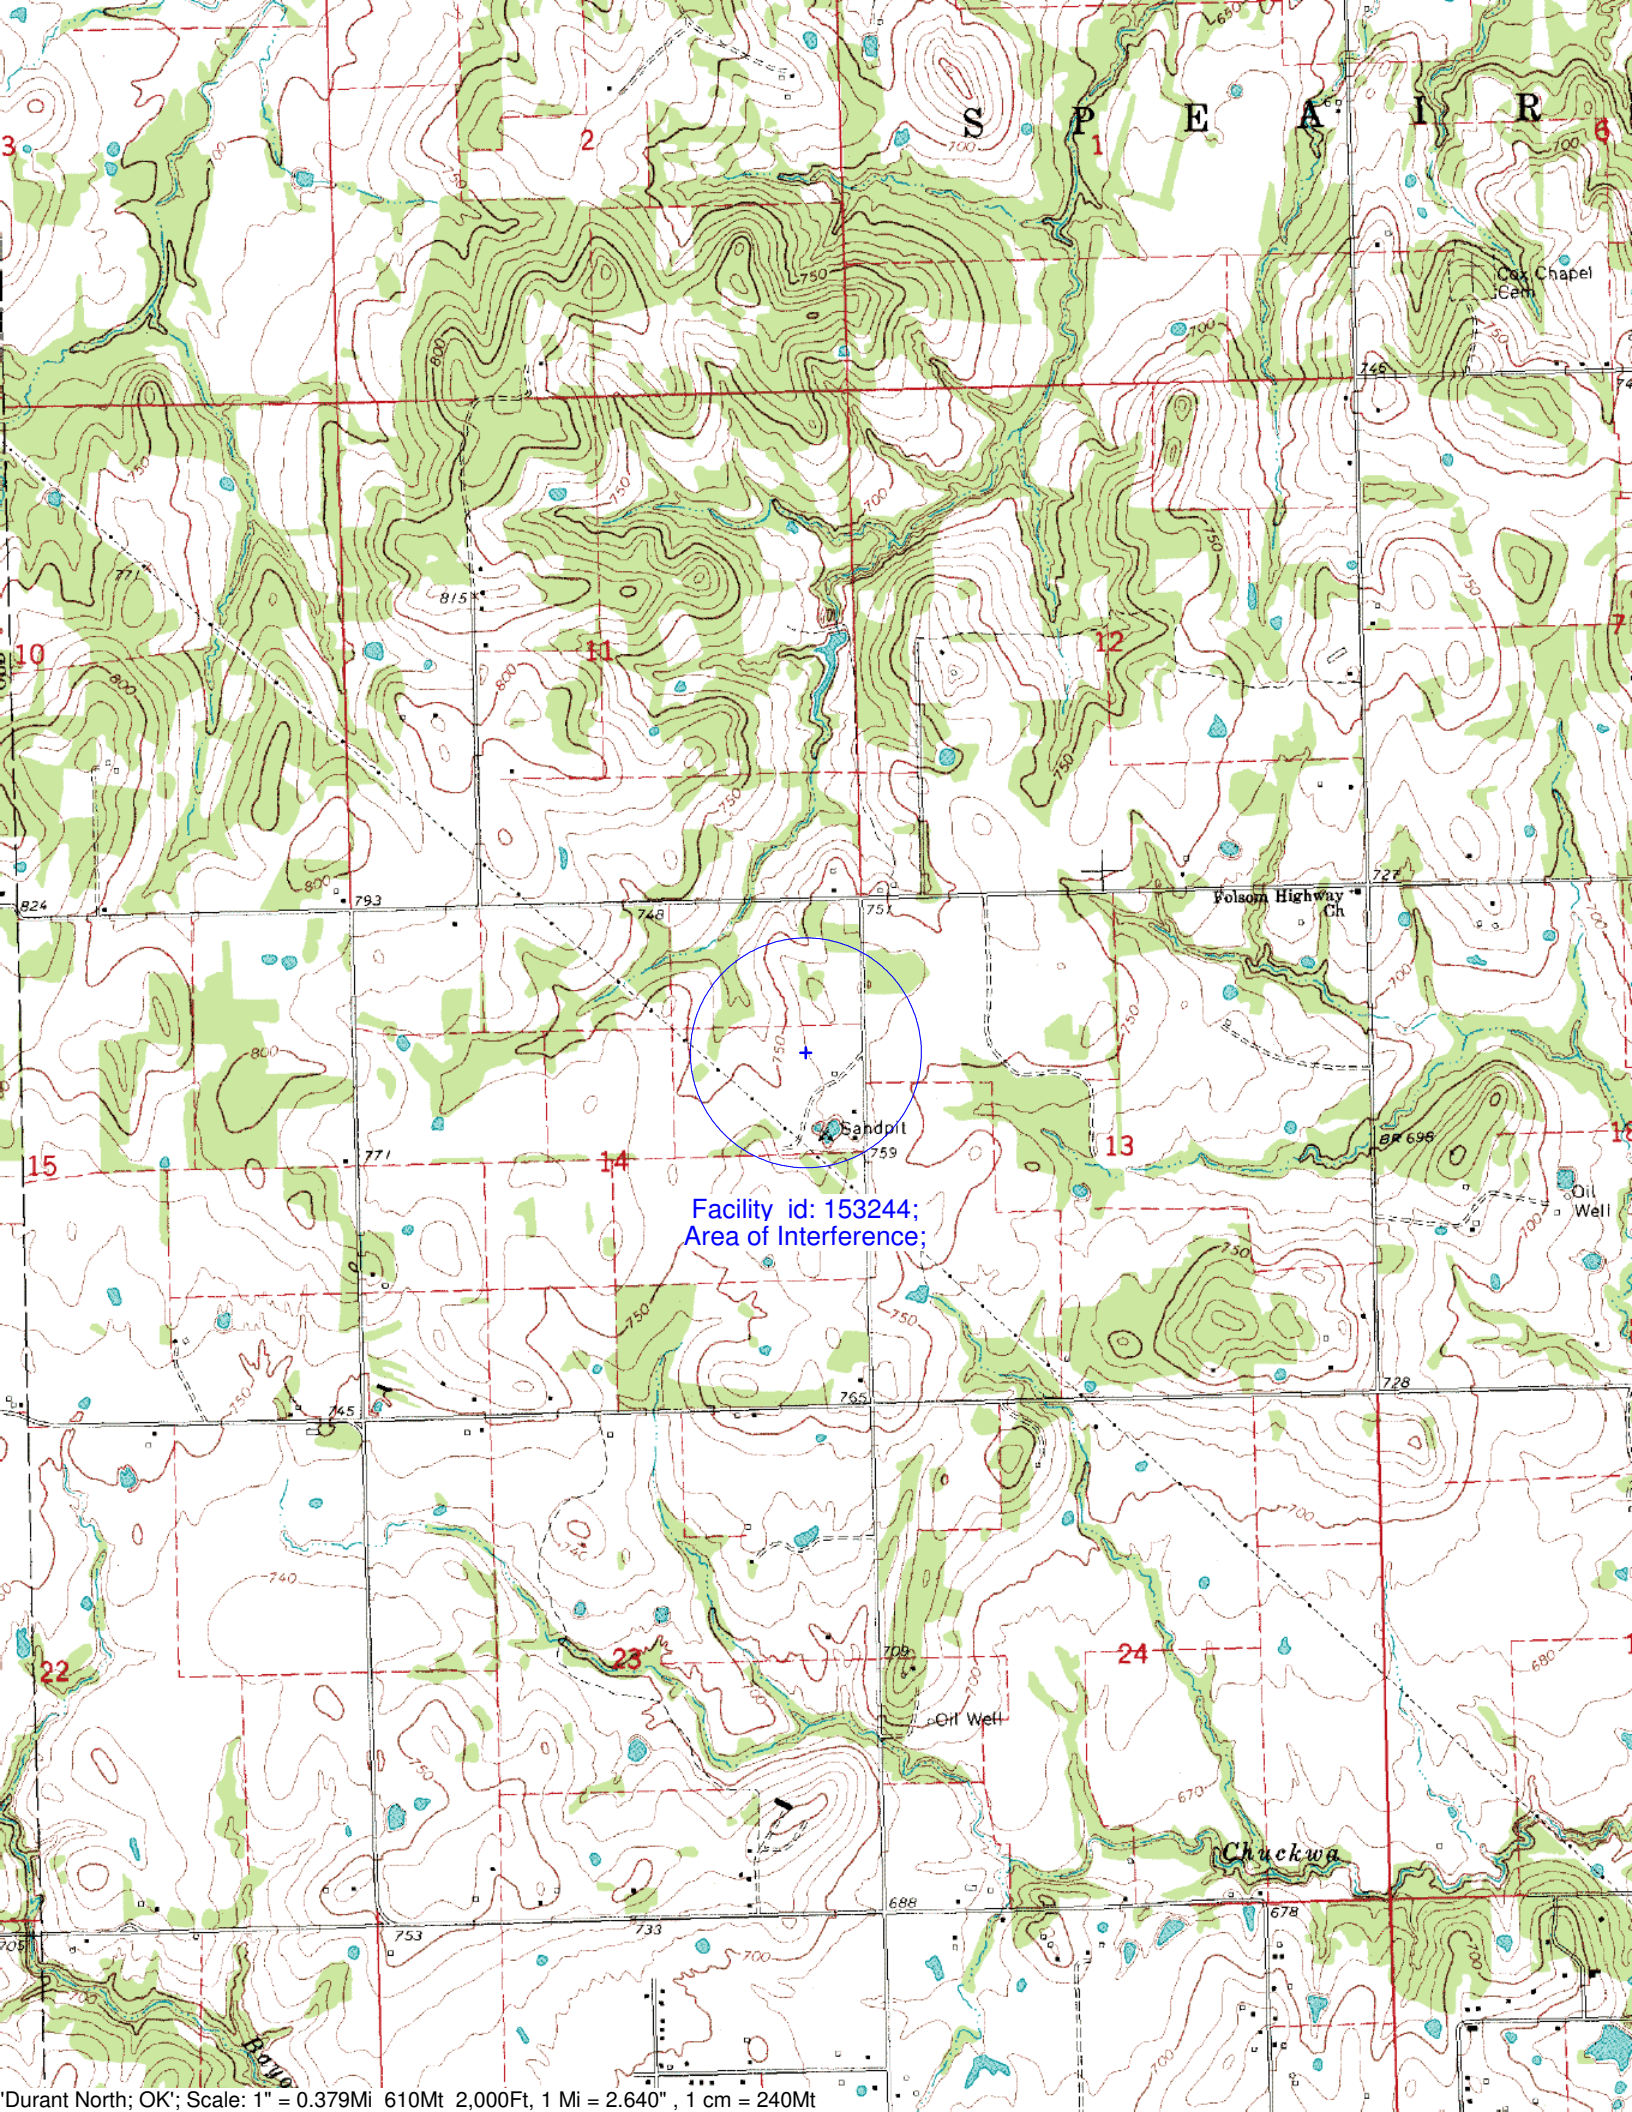

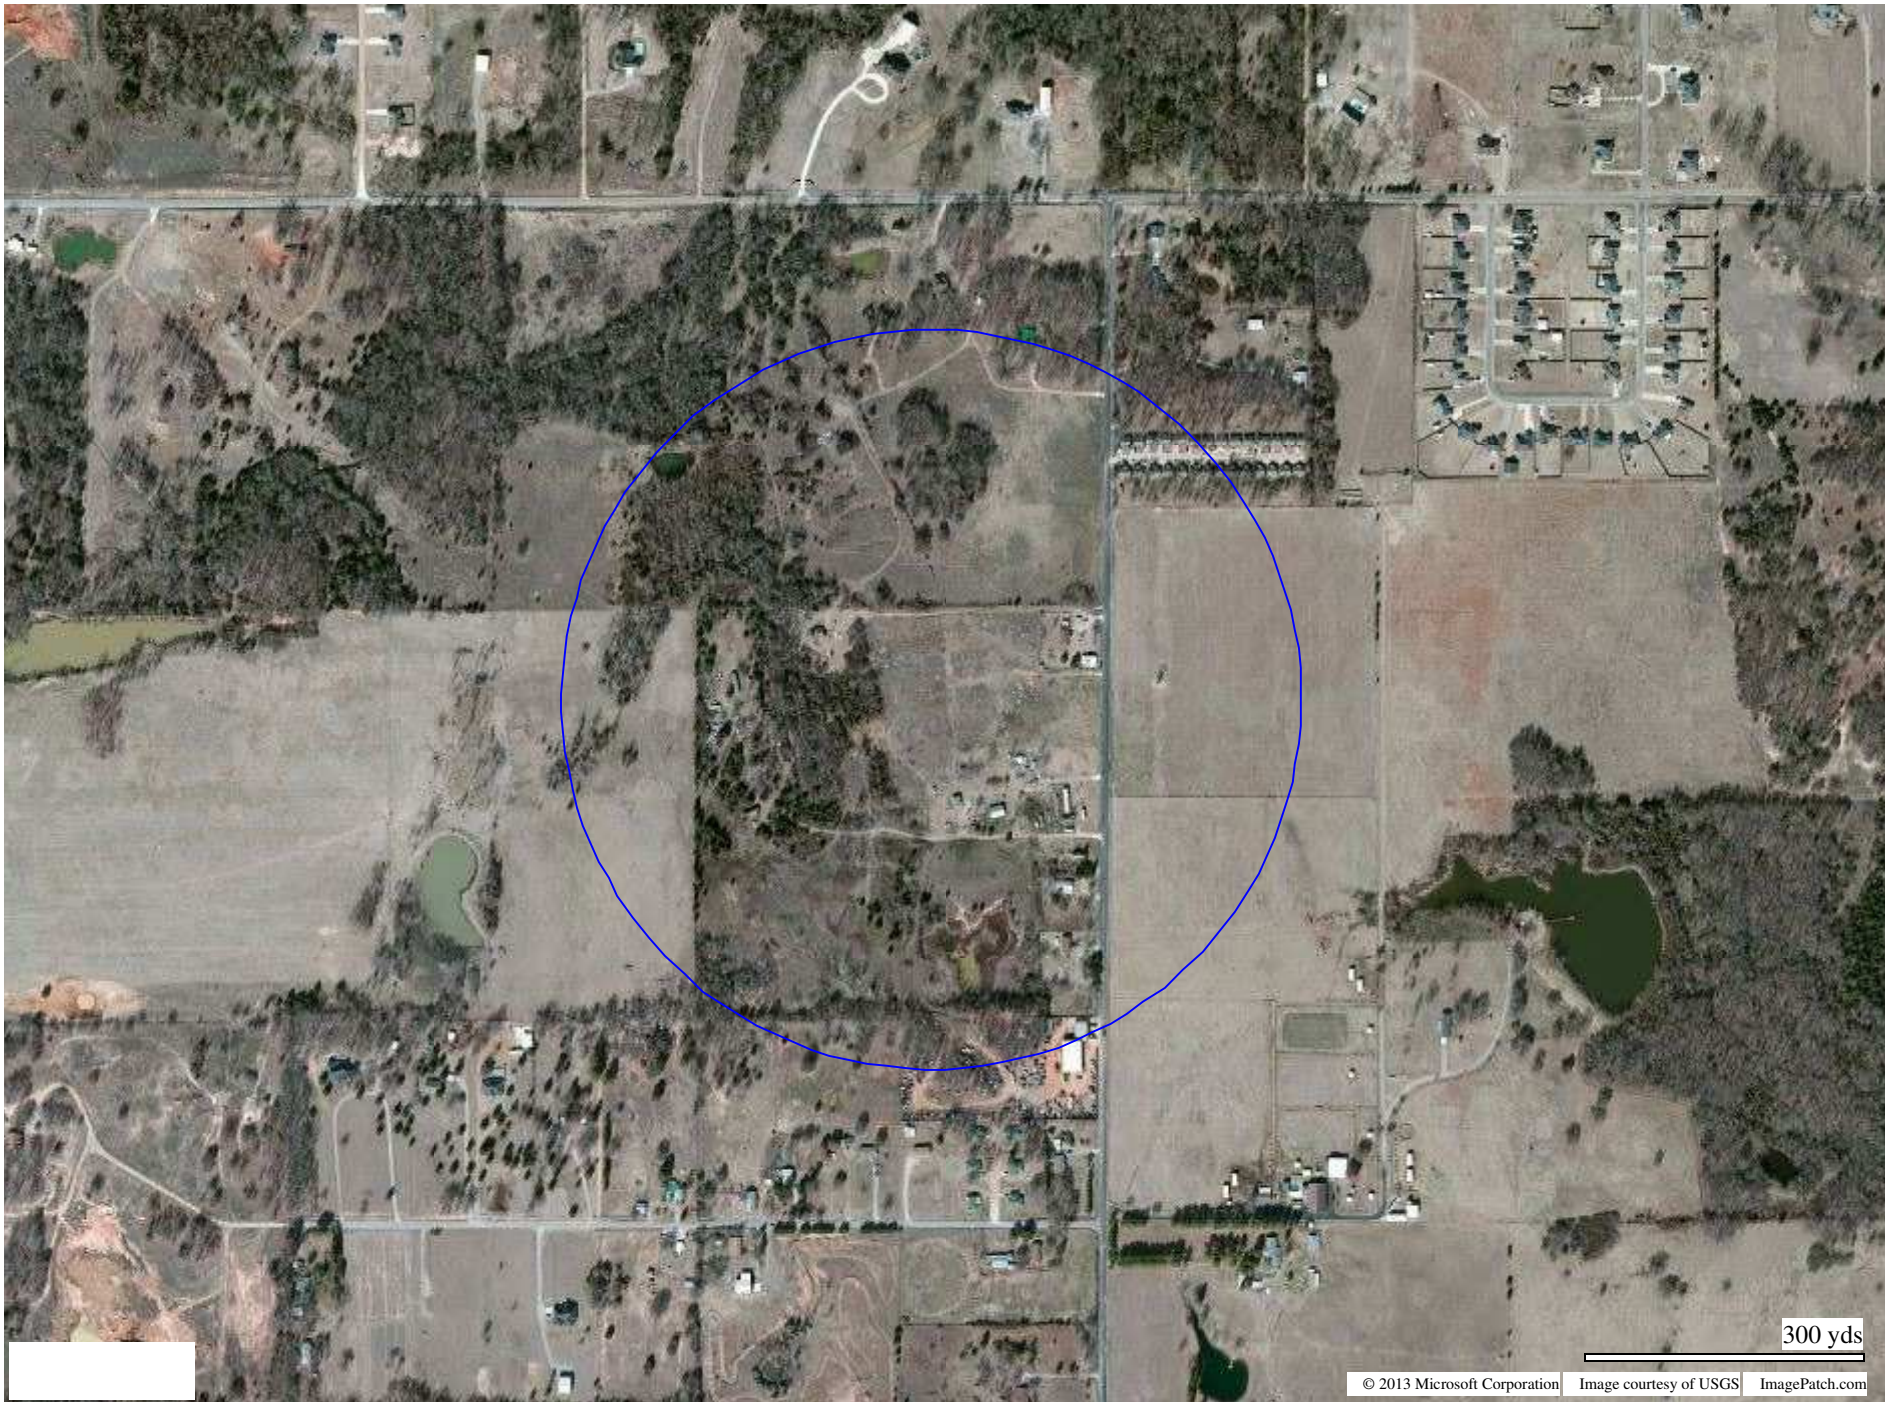

300 yds