

**Exhibit 11 Page 1**  
**Centro Cristiano Oasis de Bendicion, Inc.**  
**Second-Adjacent Waiver Request**  
**Augusta, GA**

The proposed LPFM station will broadcast on channel 247, which is within the 40 kilometers second-adjacent minimum distance separation of station WTHB-FM on channel 245. The WTHB-FM interfering contour at the LPFM tower site is 59.4 dBμ F(50,50). Using the ratio of 100:1 (LPFM to WTHB-FM) on the second-adjacent channel, the population within the proposed LPFM 99.4 dBμ contour is zero. Applying the antenna manufacturer's vertical radiation pattern the area of interference can be more accurately calculated geometrically, rather than just by using the free space equation alone. This particular antenna is a three bay 3/4 wave spaced Nicom BKG77 antenna. It was determined from the manufacturer's vertical plan that at 10 degrees below horizontal the interference area would extend 42.5 meters toward the ground and 241.3 meters horizontally. We have proposed the antenna radiation center will be 45 meters above ground with an Effective Radiated Power of 50 watts, thus the interference area will not reach the ground. Further, there are no occupied structures or elevated roadways within the interference area. Therefore, the application is in compliance with §73.807(e) (1) *Waiver of the second-adjacent channel separations.*

# Exhibit 11 Figure 1

## Minimum Ground Clearance


Depression Angle Below Horizontal	Antenna Relative Field	ERP (Watts)	Distance to interfering Contour from Antenna (m)	Horizontal Distance of Interfering contour from tower (m)	Vertical Clearance of Interfering contour above TGL (m)
5	0.834	34.8	443	441.3	6.4
10	0.460	10.6	245	241.3	2.5
15	0.127	0.8	67	64.7	27.7
20	0.002	0.0	0	0.0	45.0
25	0.029	0.0	0	0.0	45.0
30	0.073	0.3	41	35.5	24.5
35	0.063	0.2	34	27.9	25.5
40	0.022	0.0	0	0.0	45.0
45	0.000	0.0	0	0.0	45.0
50	0.011	0.0	0	0.0	45.0
55	0.038	0.1	24	13.8	25.3
60	0.057	0.2	34	17.0	15.6
65	0.060	0.2	34	14.4	14.2
70	0.048	0.1	24	8.2	22.4
75	0.034	0.1	24	6.2	21.8
80	0.021	0.0	0	0.0	45.0
85	0.014	0.0	0	0.0	45.0
90	0.013	0.0	0	0.0	45.0
Minimum Clearance above TGL:					2.5 m

TX station: BKG77/3 GENERIC

Site name:

Frequency: 100.00 MHz

Vertical diagram

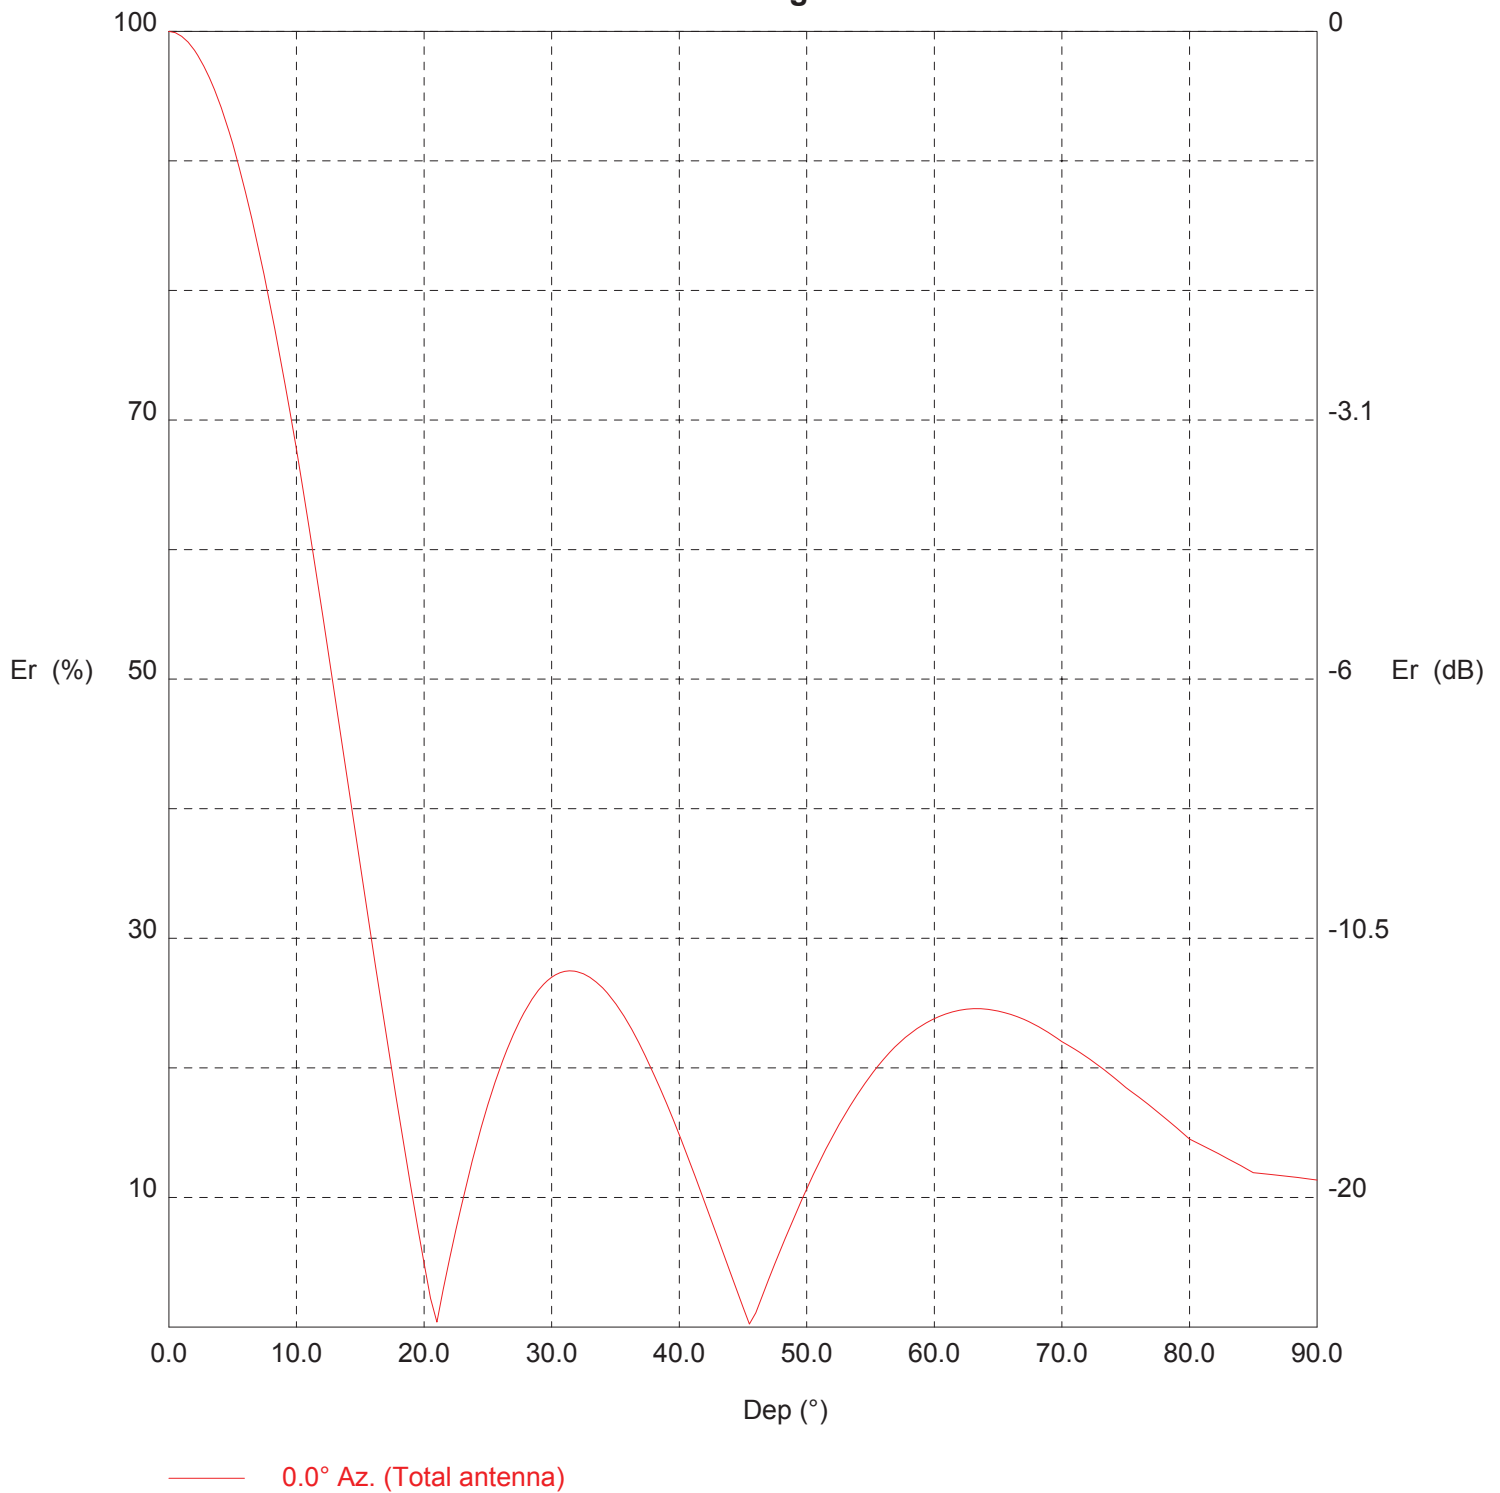

# Centro Cristiano Oasis de Bendicion, Inc.

## Exhibit 11 Figure 2 Page 2

TX station: BKG77/3 GENERIC

Site name:

Frequency: 100.00 MHz

### Vertical diagram at an azimuth of 0° degrees

Dep (°)	Er (%)	ERP (KW)	Dep (°)	Er (%)	ERP (KW)	Dep (°)	Er (%)	ERP (KW)
0.0	100.0	1.37	30.0	27.0	0.10	60.0	23.8	0.08
0.5	99.9	1.37	30.5	27.3	0.10	60.5	24.0	0.08
1.0	99.6	1.36	31.0	27.4	0.10	61.0	24.2	0.08
1.5	99.2	1.35	31.5	27.5	0.10	61.5	24.3	0.08
2.0	98.5	1.33	32.0	27.4	0.10	62.0	24.5	0.08
2.5	97.8	1.31	32.5	27.3	0.10	62.5	24.5	0.08
3.0	96.8	1.28	33.0	27.0	0.10	63.0	24.6	0.08
3.5	95.7	1.26	33.5	26.6	0.10	63.5	24.6	0.08
4.0	94.4	1.22	34.0	26.2	0.09	64.0	24.5	0.08
4.5	92.9	1.18	34.5	25.6	0.09	64.5	24.5	0.08
5.0	91.3	1.14	35.0	25.0	0.09	65.0	24.4	0.08
5.5	89.5	1.10	35.5	24.2	0.08	65.5	24.3	0.08
6.0	87.6	1.05	36.0	23.4	0.08	66.0	24.1	0.08
6.5	85.5	1.00	36.5	22.5	0.07	66.5	23.9	0.08
7.0	83.3	0.95	37.0	21.6	0.06	67.0	23.7	0.08
7.5	81.0	0.90	37.5	20.6	0.06	67.5	23.5	0.08
8.0	78.6	0.85	38.0	19.5	0.05	68.0	23.3	0.07
8.5	76.0	0.79	38.5	18.4	0.05	68.5	23.0	0.07
9.0	73.4	0.74	39.0	17.3	0.04	69.0	22.7	0.07
9.5	70.6	0.68	39.5	16.1	0.04	69.5	22.4	0.07
10.0	67.8	0.63	40.0	14.8	0.03	70.0	22.0	0.07
10.5	64.7	0.57	40.5	13.6	0.03	70.5	21.7	0.06
11.0	61.6	0.52	41.0	12.3	0.02	71.0	21.4	0.06
11.5	58.5	0.47	41.5	11.0	0.02	71.5	21.1	0.06
12.0	55.3	0.42	42.0	9.6	0.01	72.0	20.8	0.06
12.5	52.1	0.37	42.5	8.3	0.01	72.5	20.4	0.06
13.0	48.8	0.33	43.0	6.9	0.01	73.0	20.1	0.06
13.5	45.5	0.28	43.5	5.6	0.00	73.5	19.7	0.05
14.0	42.2	0.24	44.0	4.2	0.00	74.0	19.3	0.05
14.5	38.9	0.21	44.5	2.9	0.00	74.5	18.9	0.05
15.0	35.7	0.17	45.0	1.5	0.00	75.0	18.5	0.05
15.5	32.4	0.14	45.5	0.2	0.00	75.5	18.1	0.05
16.0	29.1	0.12	46.0	1.1	0.00	76.0	17.8	0.04
16.5	25.9	0.09	46.5	2.4	0.00	76.5	17.4	0.04
17.0	22.7	0.07	47.0	3.6	0.00	77.0	17.0	0.04
17.5	19.6	0.05	47.5	4.9	0.00	77.5	16.6	0.04
18.0	16.5	0.04	48.0	6.1	0.01	78.0	16.2	0.04
18.5	13.5	0.02	48.5	7.3	0.01	78.5	15.8	0.03
19.0	10.5	0.02	49.0	8.5	0.01	79.0	15.4	0.03
19.5	7.7	0.01	49.5	9.6	0.01	79.5	14.9	0.03
20.0	4.9	0.00	50.0	10.7	0.02	80.0	14.5	0.03
20.5	2.2	0.00	50.5	11.7	0.02	80.5	14.3	0.03
21.0	0.4	0.00	51.0	12.7	0.02	81.0	14.0	0.03
21.5	2.9	0.00	51.5	13.7	0.03	81.5	13.8	0.03
22.0	5.3	0.00	52.0	14.7	0.03	82.0	13.5	0.03
22.5	7.5	0.01	52.5	15.6	0.03	82.5	13.3	0.02
23.0	9.7	0.01	53.0	16.4	0.04	83.0	13.0	0.02
23.5	11.7	0.02	53.5	17.2	0.04	83.5	12.7	0.02
24.0	13.7	0.03	54.0	18.0	0.04	84.0	12.5	0.02
24.5	15.5	0.03	54.5	18.7	0.05	84.5	12.2	0.02
25.0	17.1	0.04	55.0	19.4	0.05	85.0	11.9	0.02
25.5	18.7	0.05	55.5	20.1	0.06	85.5	11.9	0.02
26.0	20.1	0.06	56.0	20.7	0.06	86.0	11.8	0.02
26.5	21.4	0.06	56.5	21.2	0.06	86.5	11.8	0.02
27.0	22.6	0.07	57.0	21.7	0.06	87.0	11.7	0.02
27.5	23.6	0.08	57.5	22.2	0.07	87.5	11.6	0.02
28.0	24.5	0.08	58.0	22.6	0.07	88.0	11.6	0.02
28.5	25.3	0.09	58.5	22.9	0.07	88.5	11.5	0.02
29.0	26.0	0.09	59.0	23.3	0.07	89.0	11.5	0.02
29.5	26.6	0.10	59.5	23.5	0.08	89.5	11.4	0.02



**Exhibit 11 Figure 3**  
**Aerial Photo of the 241.3 meter Vicinity Surrounding the Proposed Tower Site**

