

EXHIBIT 13

Waiver Request of Section 74.1204

K220HA Kihei, HI 10 Watts ERP

Minor Change Channel 217

Calvary Chapel of Twin Falls, Inc.

February 2014

The proposed site is contained entirely inside the service contour of third-adjacent FM Station KKUA Wailuku, HI and second-adjacent FM Station KMNO Wailuku

The shared transmit antenna and coax will not be modified on this proposal.

KKUA

The proposed site is contained entirely inside the service contour of third-adjacent KKUA, 214C, 56kW, Wailuku, HI. KKUA is colocated with the proposed, making the level of least arriving protected F(50,50) signal at the proposed transmitter site more than 100.0-dBu. Using the Undesired-to-Desired method for calculating proposed interference, the interfering contour is more than 140-dBu (free-space contour method employed). The interfering signal would extend less than 1 meter from the center of radiation, which will remain at 15 meters AGL. This interference contour does not touch the ground and because this is a remote communications site, there are no residences or businesses located within the contour. The only structures at this site house equipment associated with the communications and broadcast on this tower. Calvary Chapel of Twin Falls, Inc. respectfully requests a waiver of the FM translator contour overlap regulations with respect to third-adjacent KKUA, Wailuku

KMNO

The proposed site is contained entirely inside the service contour of second-adjacent KMNO, 219C3, .110kW, Wailuku, HI. The level of least arriving protected F(50,50) signal at the proposed transmitter site is 60.3-dBu. Using the U/D method for calculating proposed interference, the interfering contour is 100.3-dBu (free-space contour method employed). The interfering signal would extend 218meters or 715 feet from the base of the tower. This tower is a remote communications site that is located away from all population on the southwest slope of Haleakala, on the Ulupalakua Ranch. Attached is a picture of google earth showing the tower and the distance of 1045 plus feet and more than 2000 feet distances. There are no residences or businesses located within the contour. The only structures at this site house equipment associated with the communications and broadcast on this tower. Calvary Chapel of Twin Falls, Inc. respectfully requests a waiver of the FM translator contour overlap regulations with respect to third-adjacent KMNO, Wailuku.

Kihei, HI K220HA Minor Change
 Calvary Chapel Of Twin Falls, Inc.
 Average Protected F(50-50)= 15.14 km
 Omni-directional


REFERENCE
 20 39 36.0 N.
 156 21 50.0 W.

CH# 217D - 91.3 MHz, Pwr= 0.01 kW, HAAT= 737.4 M, COR= 1347 M

DISPLAY DATES
 DATA 02-06-14
 SEARCH 02-06-14

CH CITY	CALL	TYPE STATE	ANT	AZI <--	DIST FILE #	LAT LNG	PWR(kW) HAAT(M)	INT(km) COR(M)	PRO(km) LICENSEE	*IN* (Overlap in km)	*OUT*
214C Wai Iuku	KKUA	LIC_CX HI		0.0 0.0	0.00 BLED20071217AAZ	20 39 36.0 156 21 50.0	56.000 779	12.3 1365	90.9 Hawai i Public Radi o, Inc.	-27.2*	-91.1*
220D Kihei	K220HA	LIC_V_ HI		0.0 0.0	0.00 BMLFT20070823AEP	20 39 36.0 156 21 50.0	0.010 737	0.2 1347	15.0 Cal vary Chapel Of Twin Fal	-15.2*	-15.2*
06ZT Kai Iua-kona	KKAM-LP	AP_D_N HI		358.7 178.7	5.01 BMJPTVL20090825BFF	20 42 19.0 156 21 54.0	3.000 816	1.9 896	7.6 Kkam, Lic	9.6R	-4.6M
219C3 Wai Iuku	KMNO	CP_HX HI		43.5 223.5	17.64 BMPED20120803ABO	20 46 31.0 156 14 49.0	0.110 935	0.7 2114	18.0 Mana`o Radi o	13.8	-0.6*
214D Hai ku	KKUA-FM2	LIC_DH_ HI		43.5 223.5	17.64 BLFTB20121107AAB	20 46 31.0 156 14 49.0	0.095	0.0 2093	1.3 Hawai i Public Radi o, Inc.	14.5	16.1
218C Kaneohe	960418MB	APP_CX HI		297.5 117.0	162.74 BNPED19960418MB	21 19 51.0 157 45 24.0	47.200 652	128.3 751	87.2 Maka' ai nana Broadcasting C	16.3	44.4
214D Hana	KKUA-FM1	LIC_H_ HI		74.8 254.9	38.74 BLFTB20100903ABI	20 45 03.5 156 00 17.1	0.200	1.0 229	6.7 Hawai i Public Radi o, Inc.	34.6	31.8
214D Hana	KKUA-FM1	CP_DH_ HI		74.8 254.9	38.74 BPFTB20110110AAF	20 45 03.5 156 00 17.1	0.400	0.1 229	1.7 Hawai i Public Radi o, Inc.	35.5	36.8
218C Honol ul u	960416MA	CP_DCX HI		294.7 114.1	197.95 BNPED19960416MA	21 23 45.0 158 05 58.0	100.000 564	136.7 734	92.6 Cal vary Chapel Of Honol ul u	43.2	74.0

Terrain database is USGS 03 SEC , R= 73.215 qualifying spacings or FCC minimum Spacings in KM, M= Margin in KM
 Contour distances are on direct line to and from reference station. Reference zone= , Co to 3rd adjacent.
 All separation margins (if shown) include rounding
 Ant Column: (D= DA Standard, Z= DA 73.215, N= Not DA 73.215, _= Omni), Pol arizati on (C,H,V,E), Beamtilt(Y,N,X)
 "*"affixed to 'IN' or 'OUT' values = site inside protected contour.

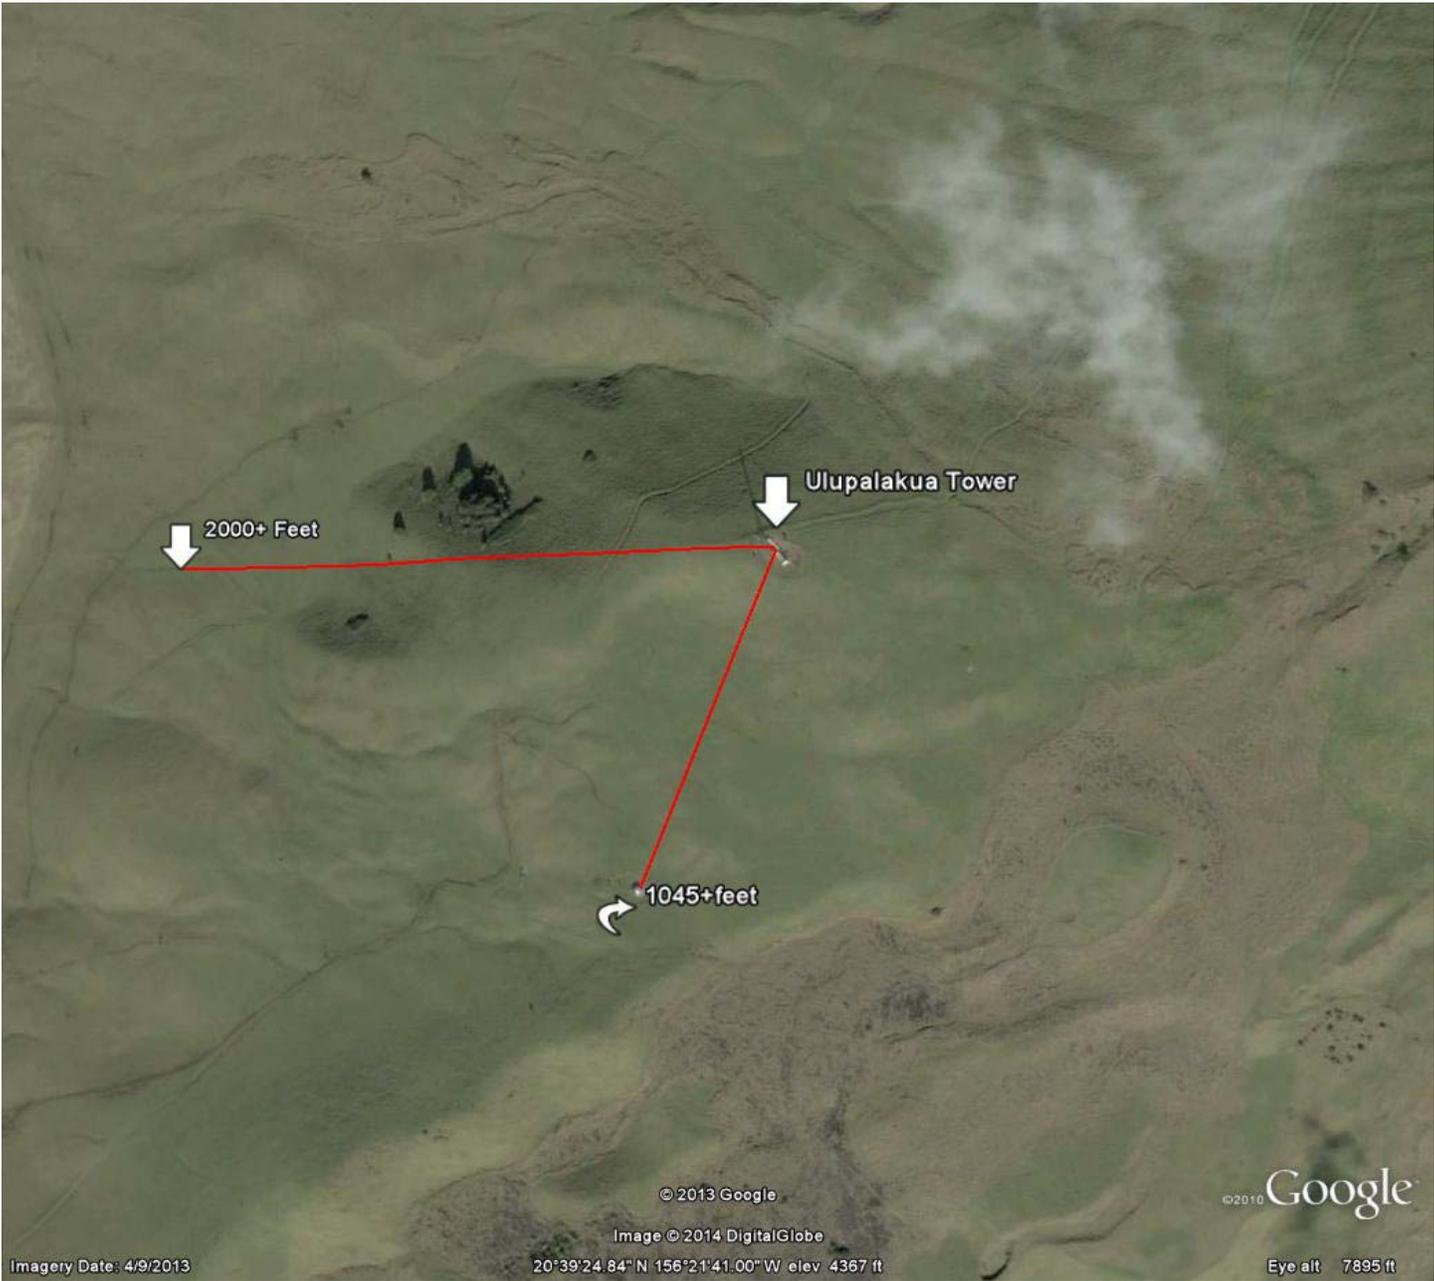

2000+ Feet

Ulupalakua Tower

1045+ feet

© 2013 Google

Image © 2014 DigitalGlobe

Imagery Date: 4/9/2013

20°39'24.84" N 156°21'41.00" W elev 4367 ft

© 2013 Google

Eye alt 7895 ft